
		Symbol	Rating	Unit
Co		V_{CBO}	-60	V
Co		V_{CEO}	-50	V
Em		V_{EBO}	-5.0	V
Co		I_C	-5.0	A
Co		P_C	2.0	W
		P_C(Tc=25)	25	W
Jur		T_j	150	
Sto		T_{stg}	-55 150	


	Symbol	Test Conditions	Min	Typ	Max	Unit

Colle
Volt5 48 ref462h5.98 418.2203 Tm0 T.a5.6270755.62 549.70008 Ttg

/ Package Dimensions

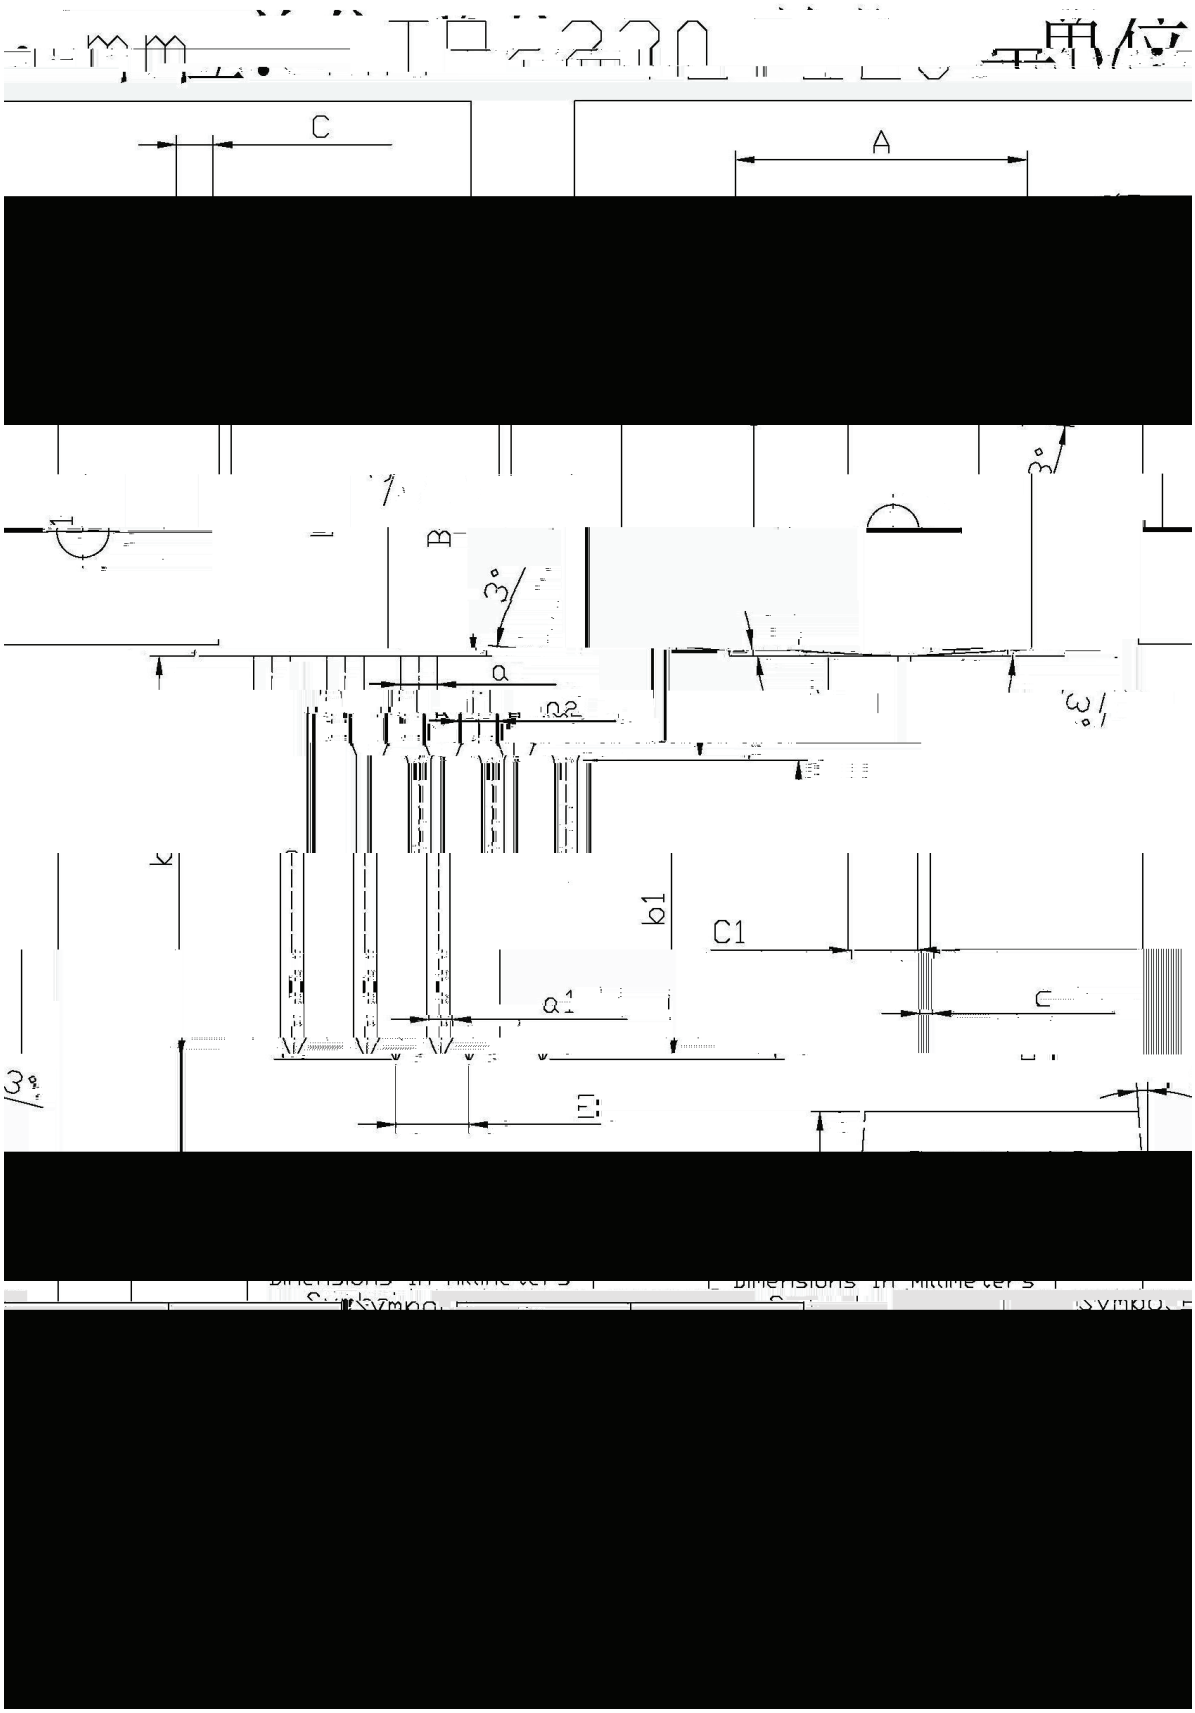

/ Marking Instructions

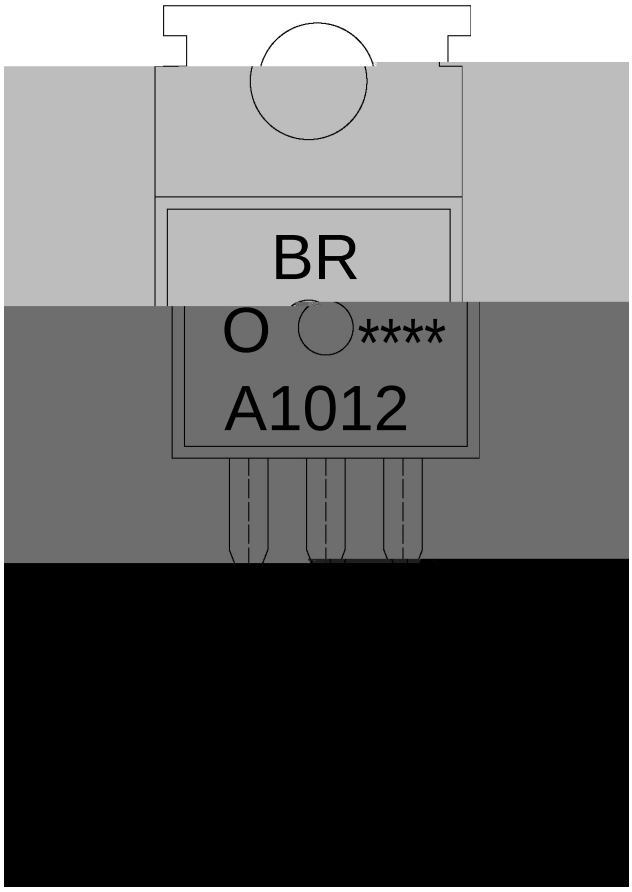

BR

A1012


O: h_{FE}

****

Note:

BR:	Company Code
A1012:	Product Type.
O:	h_{FE} Classifications Symbol
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

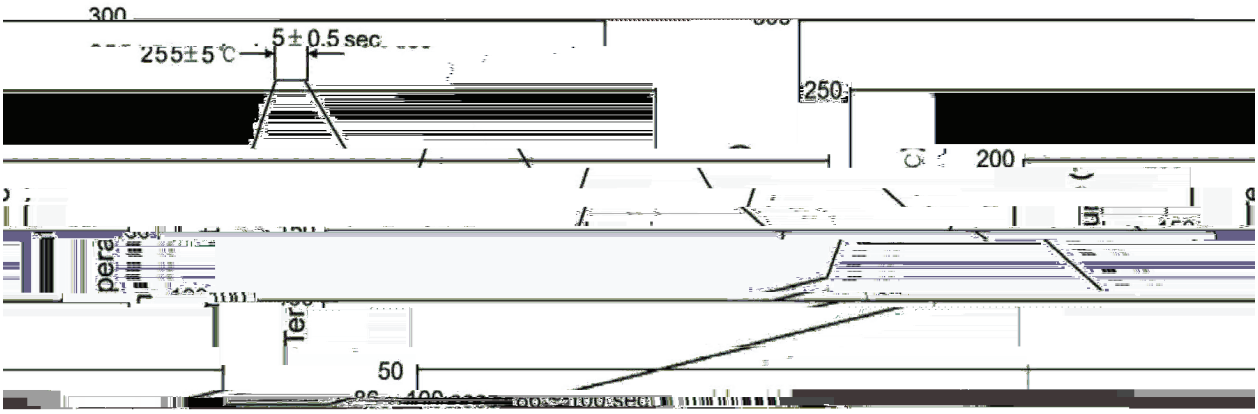

								Note:	
1		25	150		60	90sec;		1.Preheating:25~150	, Time:60~90sec.
2		255±5				5±0.5sec;		2.Peak Temp.:255±5	, Duration:5±0.5sec.
3				2	10	/sec.		3. Cooling Speed: 2~10	/sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units			/ ç	Dimension	(unit mm^3)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /			