
TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.

2SC1740

Excellent h_{FE} linearity, complementary pair with 2SC1740.

General purpose applications.







PIN1 Base PIN 2 a3]TJ/TT7 1 Tf79.0971 0TD0 Tc0 Tw8.0797 Tj/TT4 1 Tf1 0 TD-0.0002 Tc1[E)-37(sm)-374(it

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-6.0	V


/ Electrical Characteristic Curve

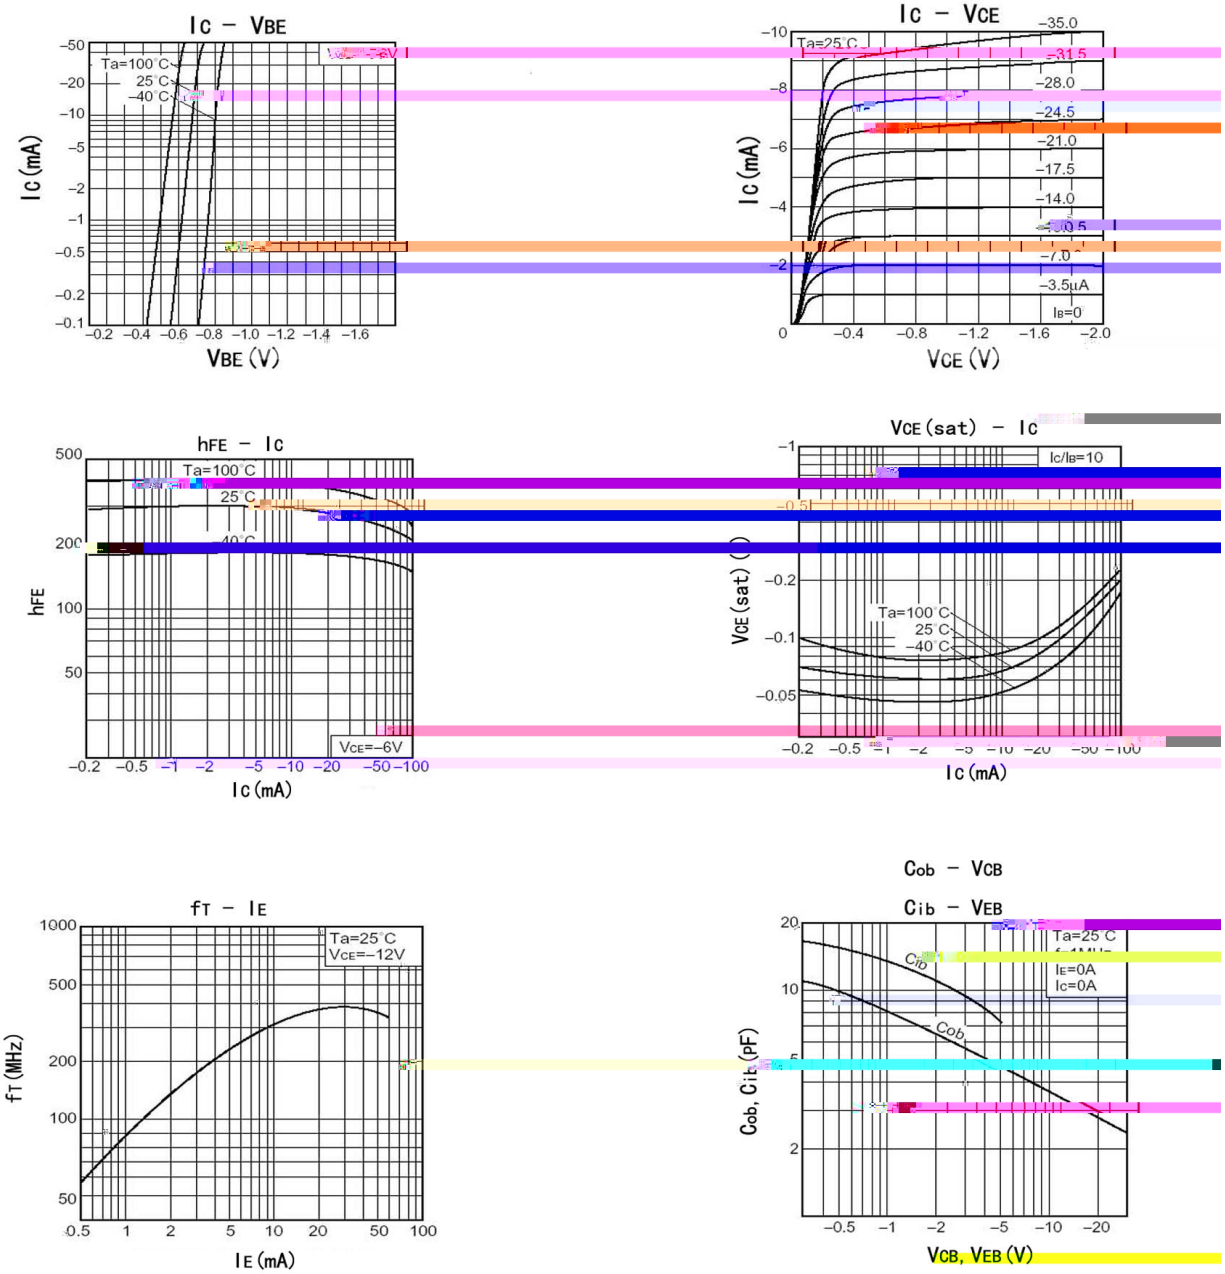

/ Package Dimensions

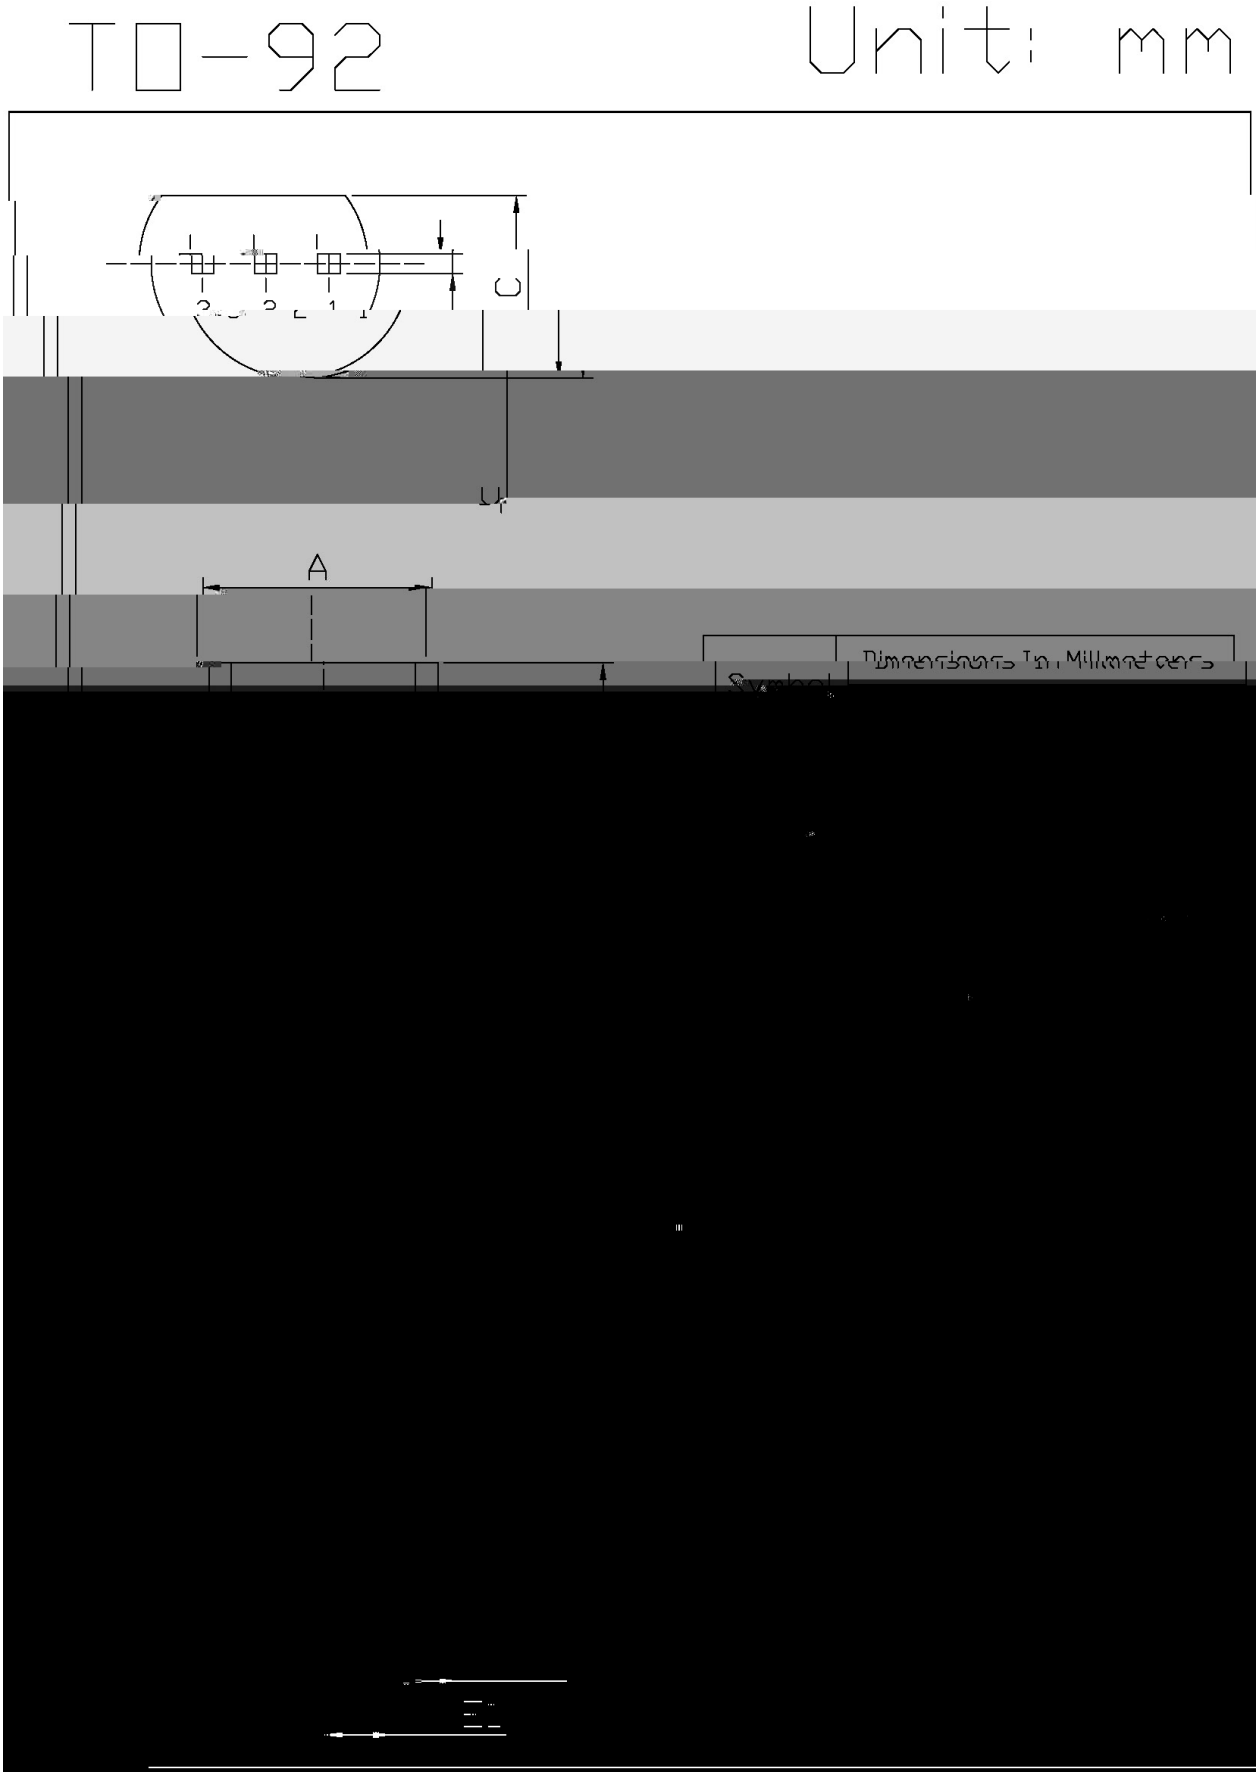

/ Marking Instructions

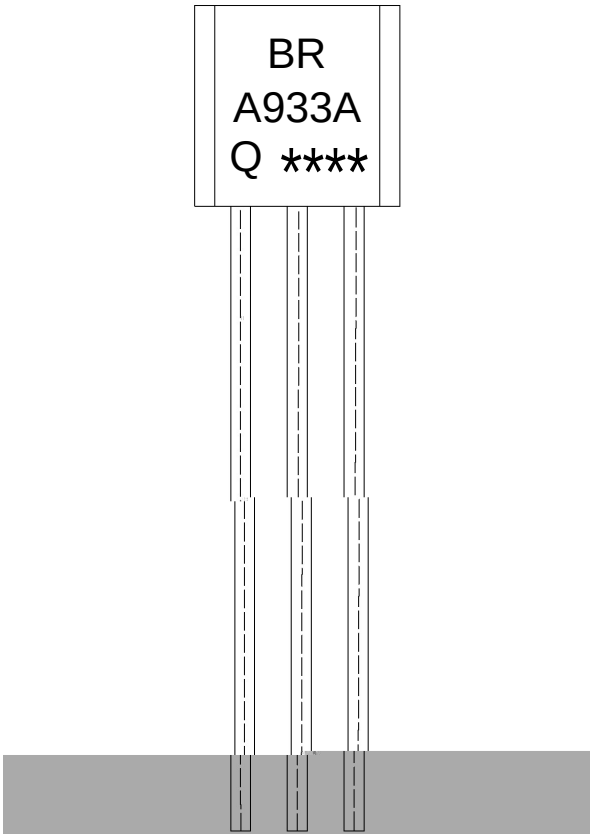

BR:

A933A

Q: h_{FE}

****

Note:

BR:	Company Code.
A933A:	Product Type.
Q:	h_{FE} Classifications Symbol.
****:	Lot No. Code,code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)



				Note:
1	25	150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5		5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3		2 10	/sec.	3. Cooling Speed: 2~10 /sec.

[redacted]; c.