
TO-92LM PNP Silicon PNP transistor in a TO-92LM Plastic Package.

2SD756
Complementary pair with 2SD756.

Low frequency high voltage amplifier.






PIN1 Base PIN 2 Collector PIN 3 Emitter


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-120	V

/ Package Dimensions

TO-92LM Unit: mm

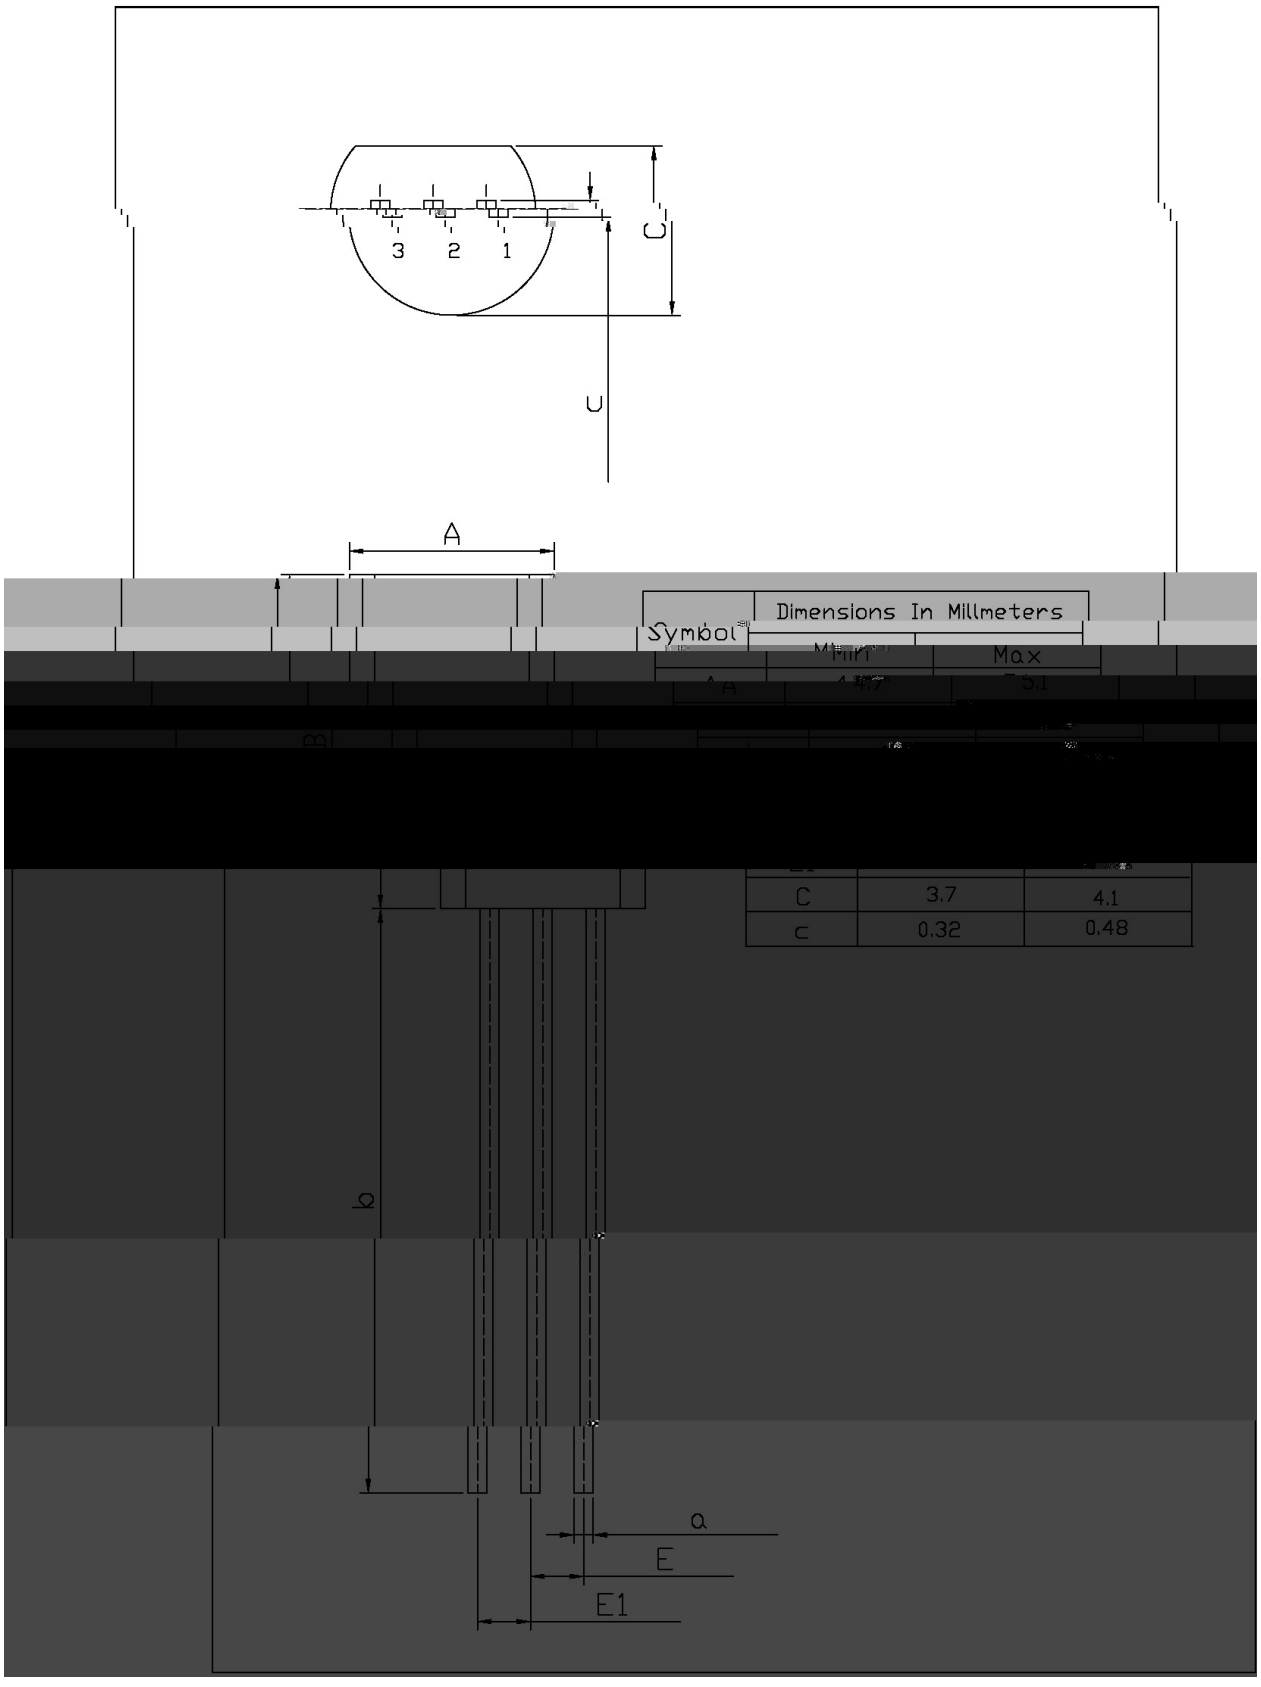

/ Marking Instructions

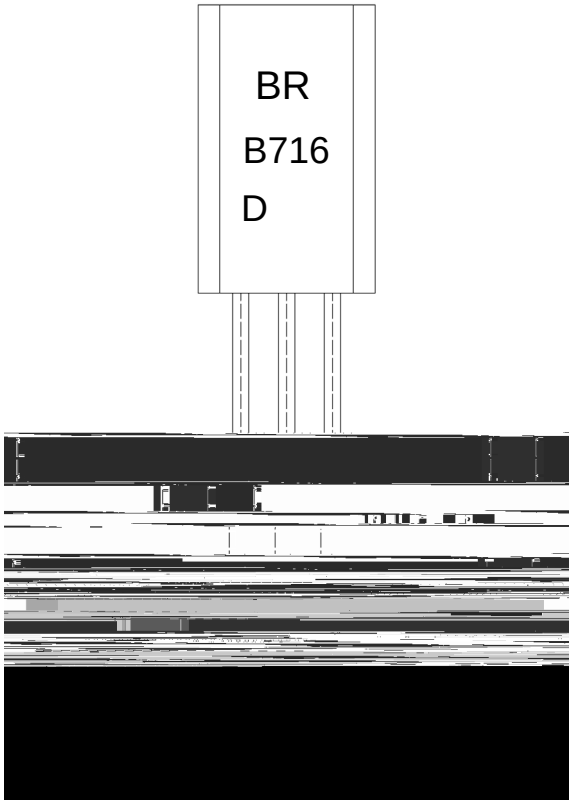

BR:

B716


D: h_{FE}

****

Note:

BR:	Company Code.
B716:	Product Type.
D:	h_{FE} Classifications Symbol
****:	Lot No. Code,code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

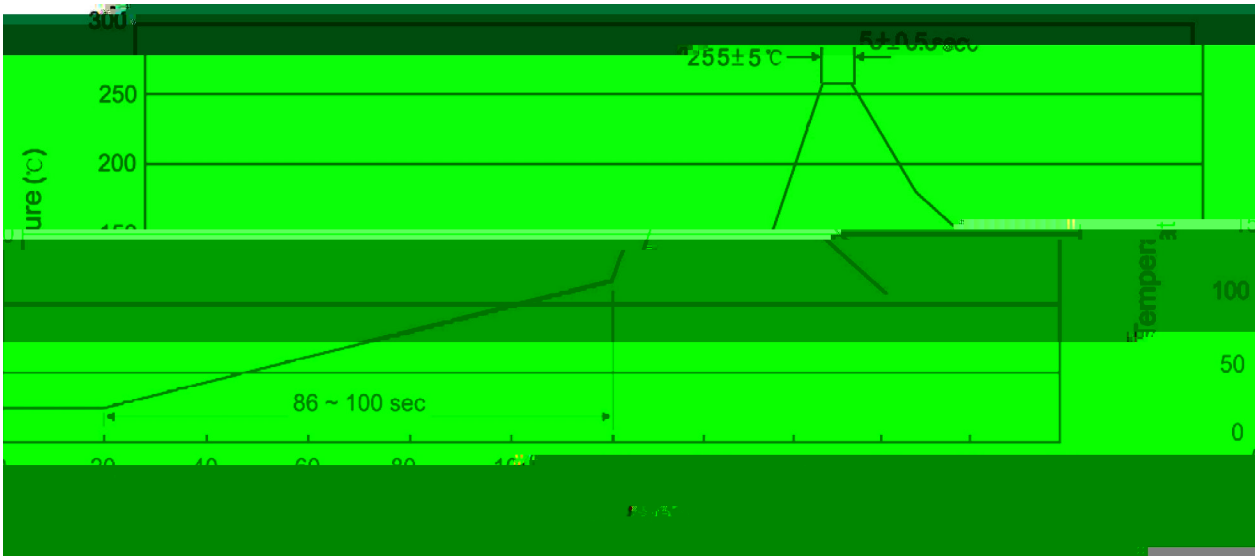

				Note:	
1	25	150	60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5			5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱 小箱