


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-60	V


/ Electrical Characteristic Curve

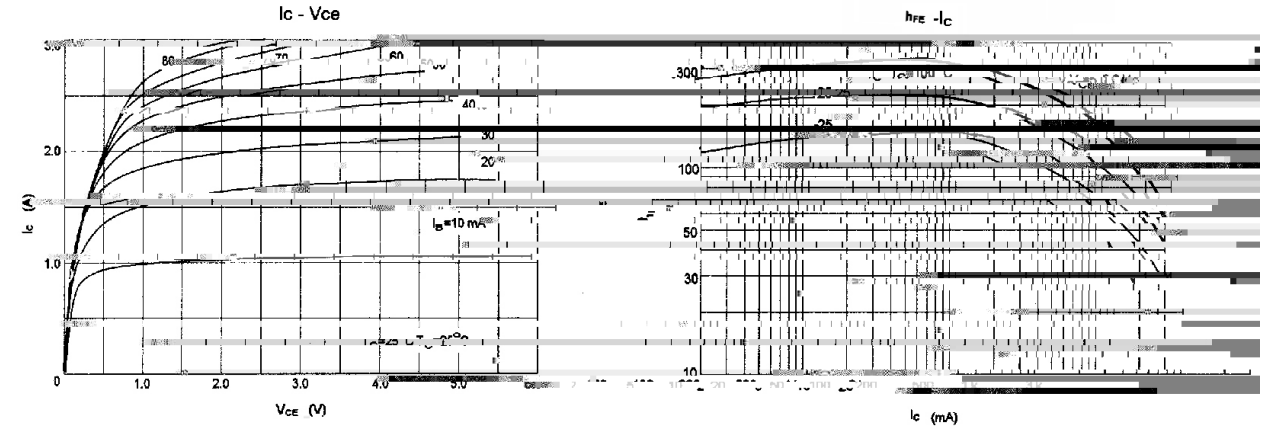

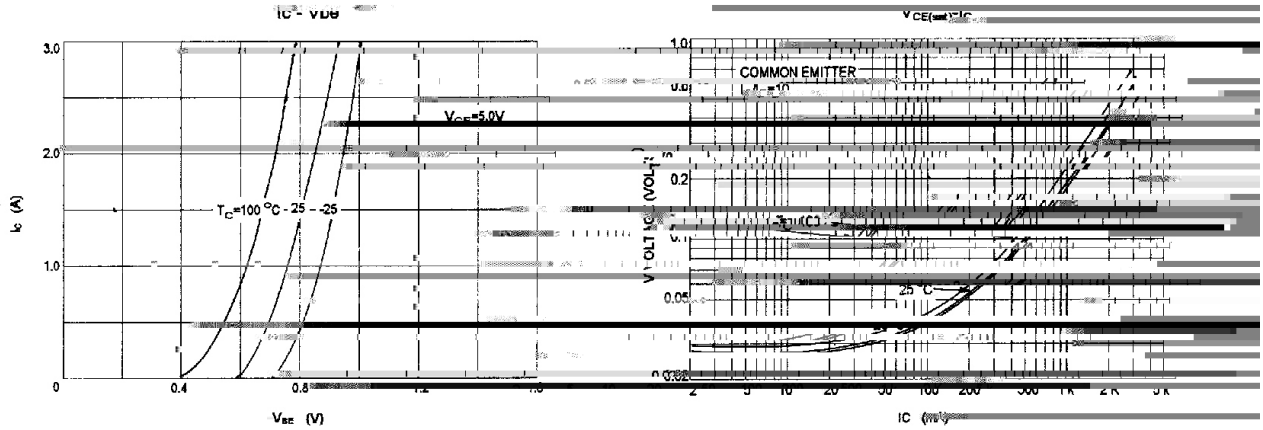


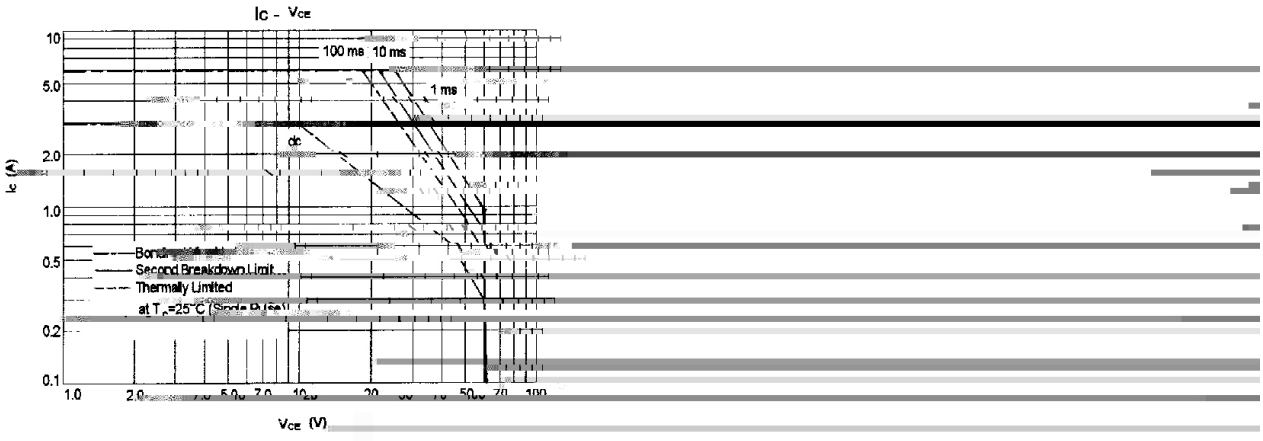

/ Package Dimensions

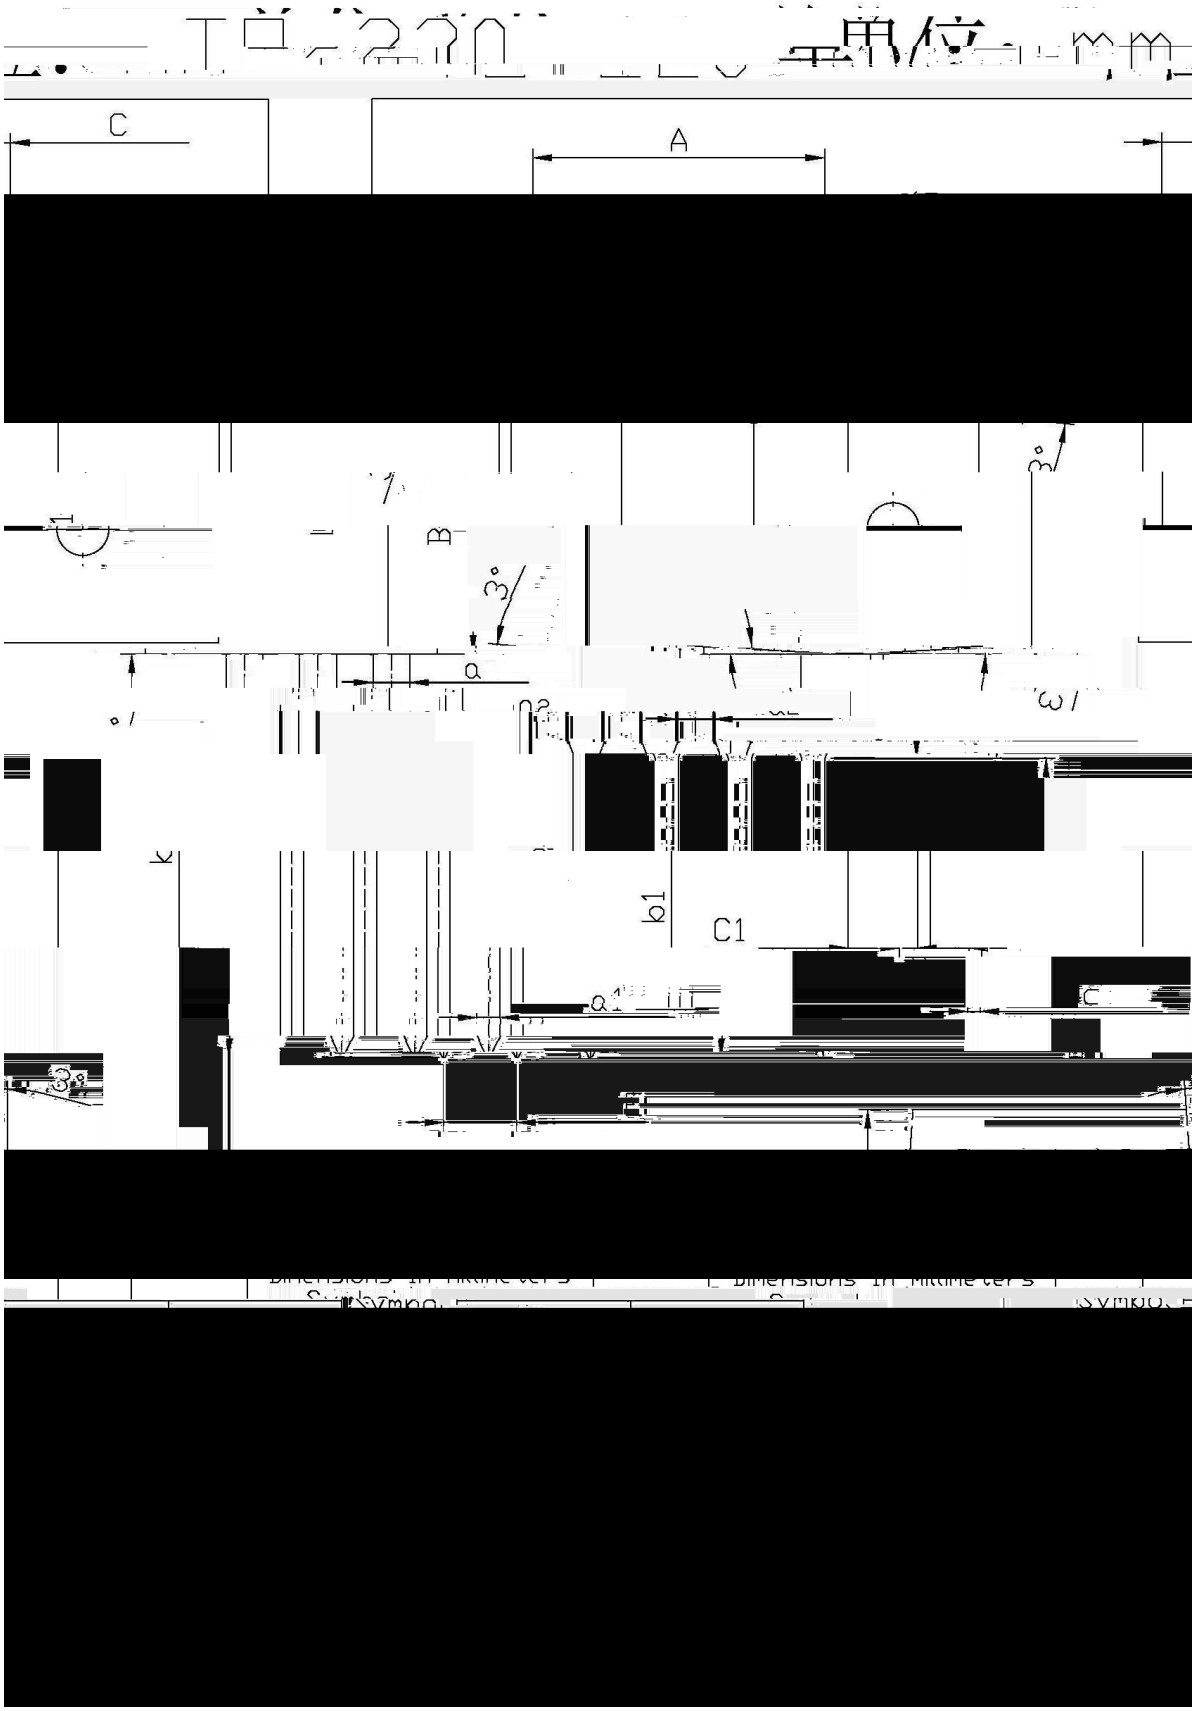

/ Marking Instructions

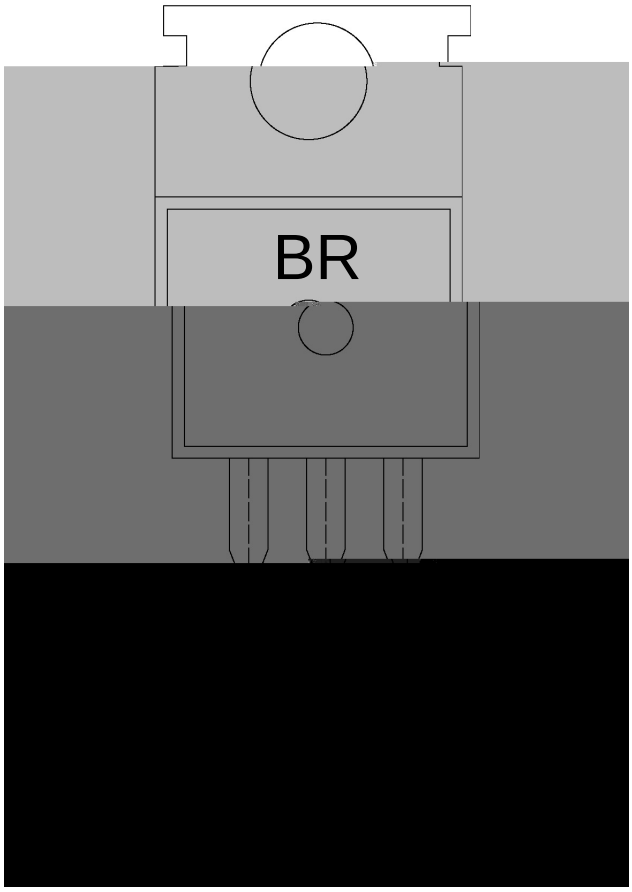

BR

B834


O: h_{FE}

****

Note:

BR:	Company Code
B834:	Product Type.
O:	h_{FE} Classifications Symbol
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

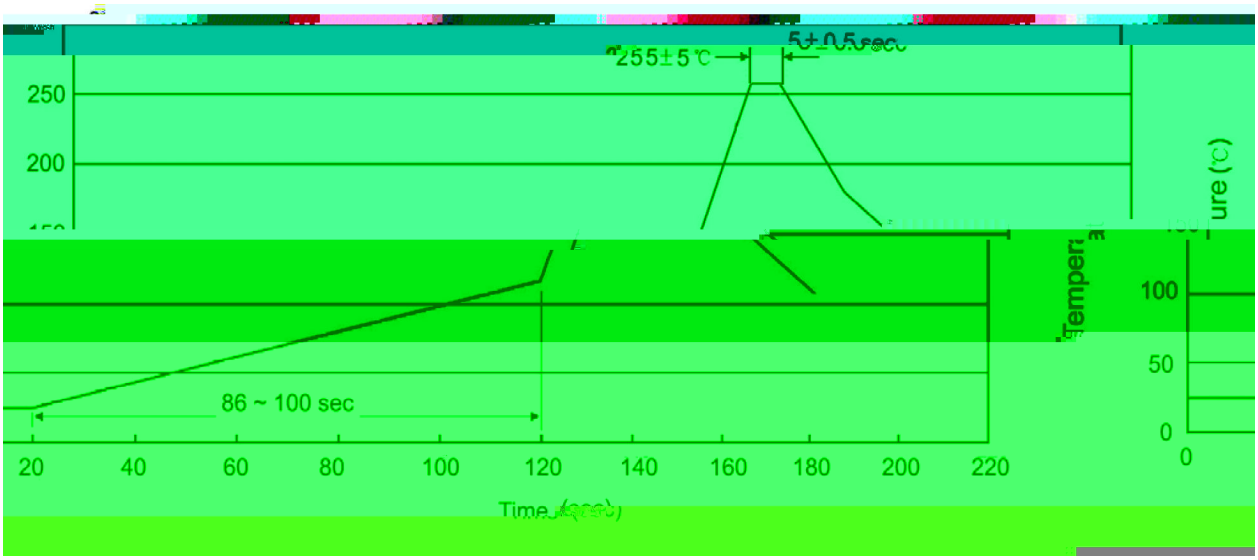

						Note:
1	25	150		60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5				5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3			2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm^3)

/ TUBE

Package Type	Units					Dimension		(unit mm^3)

/ Notices