
/ Absolute Maximum Ratings(Ta=25)


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	230	V
Collector to Emitter Voltage	V_{CEO}	230	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	1.0	A
Base Current – Continuous	I_B	0.1	A
Collector Power Dissipation	P_C	1.5	W
Collector Power Dissipation	P_C(Tc=25)	15	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Emitter Breakdown Voltage	V_{CEO}	I_C=10mA I_B=0	230			V
Collector Cut-Off Current	I_{CBO}	V_{CB}=230V I_E=0			1.0	A
Emitter Cut-Off Current	I_{EBO}	V_{EB}=5.0V I_C=0			1.0	A
DC Current Gain	h_{FE}	V_{CE}=5.0V I_C=100mA	100		320	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=500mA I_B=50mA			1.5	V
Base to Emitter Voltage	V_{BE}	V_{CE}=5.0V I_C=500mA			1.0	V
Transition Frequency	f_T	V_{CE}=10V I_C=100mA		100		MHz
Collector output capacitance	C_{ob}	V_{CB}=10V I_E=0 f=1.0MHz		20		pF

/ Electrical Characteristic Curve

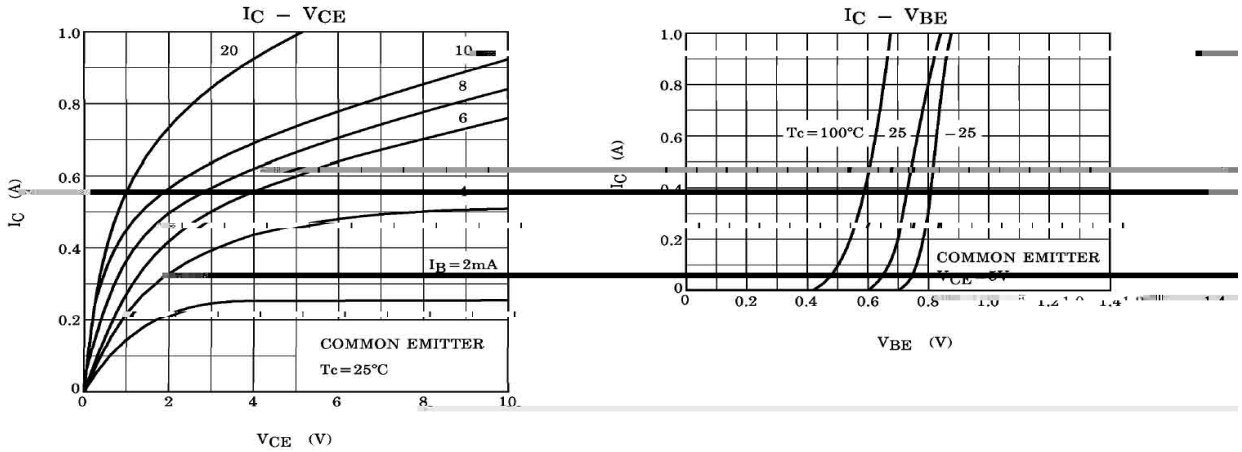

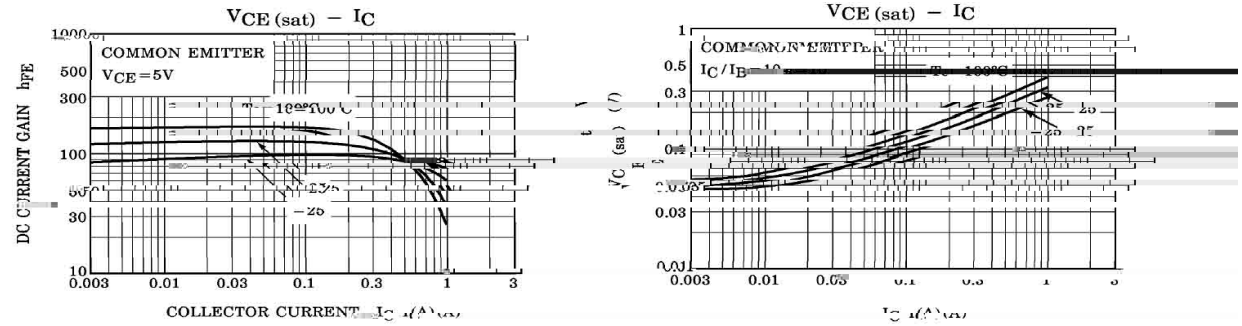

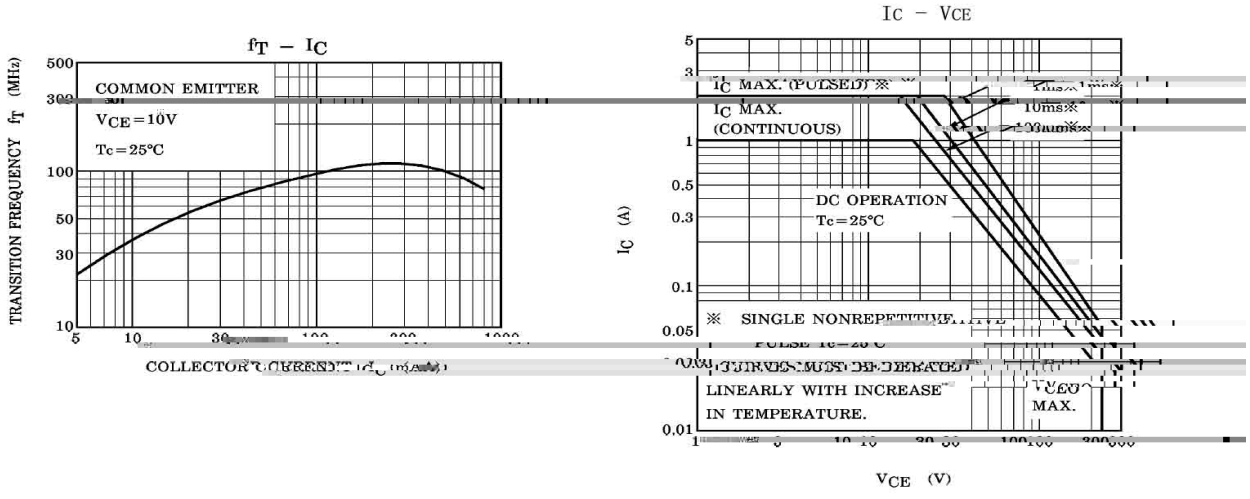


/ Package Dimensions



D1	5.10	5.50	K	0.00
	0.10			

TO-252

/ Marking Instructions

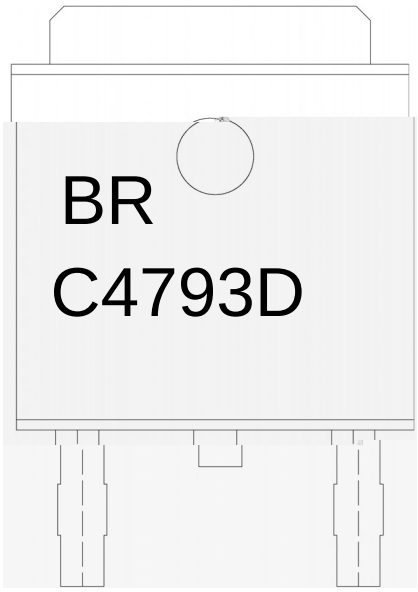

BR

C4793D

****

Note:

BR:	Company Code
C4793D:	Product Type.
****:	Lot No. Code, code change with Lot No.