/ Descriptions

WR0585 ṂṂ Ꝉ QSQ ÆṀ ч s ‖ ㄱ Silicon NPN transistor in a TO-252 Plastic Package.

/ Features

ɤ` Ⱶ Ɔ Я ı Ӈ ف Ɔ ‖ ڑ ˛ Ɔ ķ ı ɤ ڃ Ѽ ļ '


High breakdown voltage ,Low collector output capacitance ,High transition frequency.

/ Applications


ɮ̂ Ɔ ◊ ě Ƶ / ㅅ Ɔ ʰ i̇ ʊ / ♂ i̇ ʊ ⊐ ∩ ڃ ㅓ ب

Power supplies, relay drivers, lamp drivers, and automotive wiring.

/ Equivalent Circuit



/ Pinning




PIN1 χ Base PIN 2,4 χ Collector PIN 3 χ Emitter

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	P	Q	R
h_{FE} Range	82 180	120 270	180 390

v ‴Ω Parameter	ϒ N Symbol	‴Ω Ö Rating	D Ч Unit
Collector to Base Voltage	V_{CBO}	120	V
Collector to Emitter Voltage	V_{CEO}	120	V
Emitter to Base Voltage	V_{EBO}	5	V
Collector Current - Continuous	I_C	2	A
Collector Current – Continuous(Pulse)	I_{CP}	3	A
Collector Power Dissipation	P_C	1.75	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Electrical Characteristic Curve

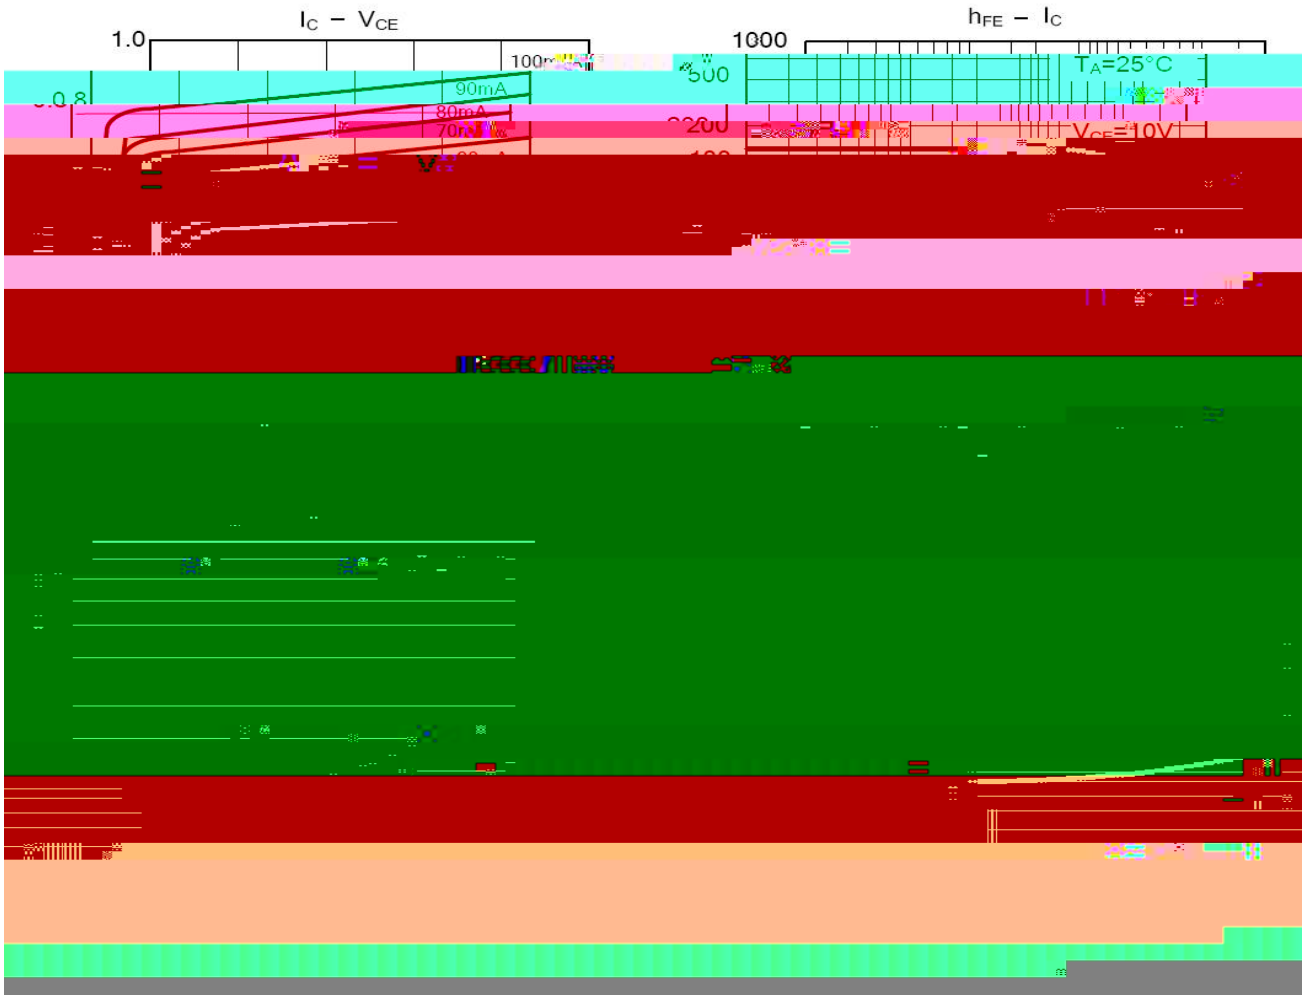


/ Package Dimensions



00	0.10	D1	5.10	5.50	K

TO-252

/ Marking Instructions

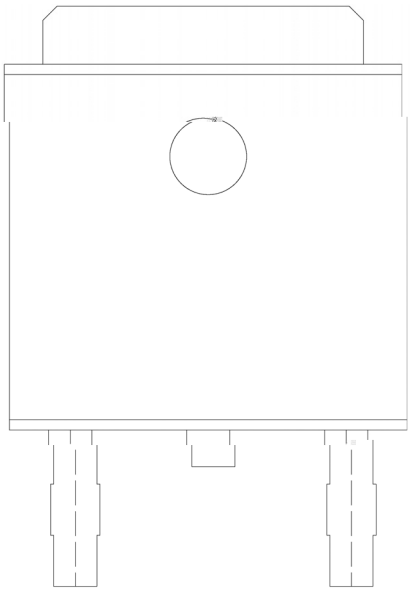

ِ ˝ χ	
BR χ	ѭ ϗ и Ґ
G4 ; 8 : G χ	ѭ ϳ N Ґ
S=	ѭ h_{FE} ‘ 6 Ґ
---- χ	ѭ ı ғ ń N Ґ ı ₴ ı ғ ń N Ψ ק
Note:	
BR:	Company Code
D1857D:	Product Type.
P:	h_{FE} Classifications Symbol
****:	