/ Descriptions

WR0<5 ṂṂ Ƀ QSQ ÆṀ ч s ‖ ㄱ


/ Features

ль 5VE894 Йӌ ´

/ Applications

ҽ̂̃ Ңӌ ı ' ѽ ᶻ

/ Equivalent Circuit



/ Pinning



23

X X X


/ hFE Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)


v ̈Ω	↑ N	̈ΩΘ	D Ĥ

v ̈Ω	↑ N	⅄ ;ſ ⅄	ώ ṇ Θ	Ɛ ʒ Θ	ώ ² Θ	D Ĥ


/ Electrical Characteristic Curve

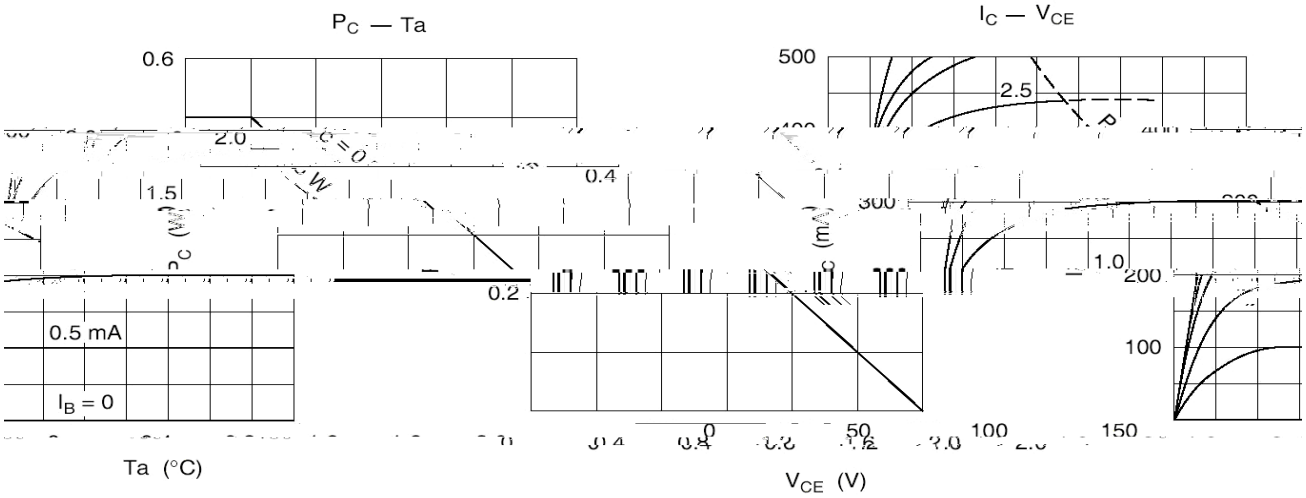

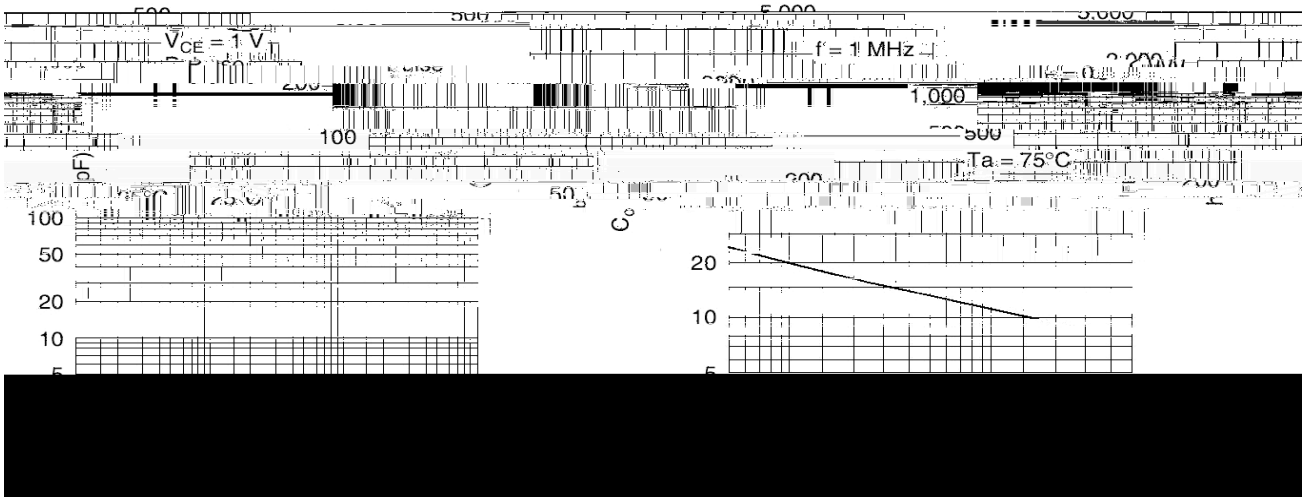

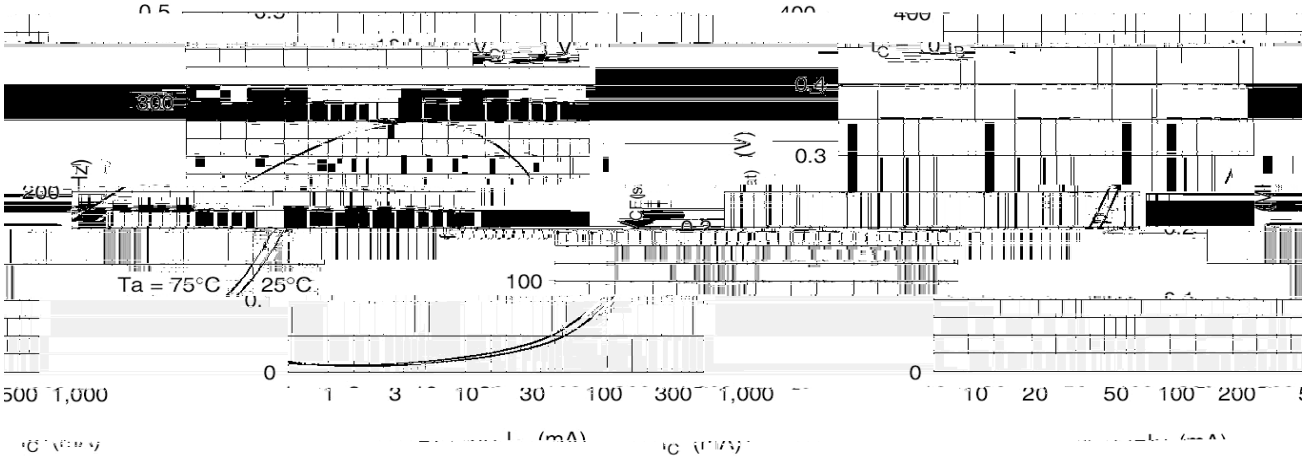

/ Marking Instructions

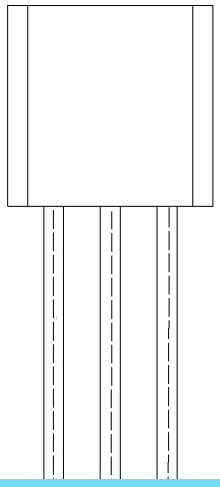

ب ˝ χ

EU= ѭ ҳ И Ґ

G79 : χ ѭ ҙ N Ґ

E= ѭ k ‘ 6 Ґ

---- χ ѭ ӏ ғ ӈ N Ґ ӏ ҿ ӏ ғ ӈ N Ψ ҏ

( ) / Temperature Profile for Dip Soldering(Pb-Free)



ب ˝ χ

Ĺ ♬ □ ů Ќ ɬ ı ˋH ژ Ќ ɬ

Š Ө □ ů ° ɬ ı ˋH ژ ˋY ﾊ ㎞ ° ° ɬ °

ì ˙ ﾘ ˛ ɔ ﻉ ů ㎞ Ќ ɬ ɬ

/ Resistance to Soldering Heat Test Conditions

□ ů χ ° ɬ ˋH ژ χ °

/ Packaging SPEC.

ˇΩ ţ ﾔ Ł