


TO-252


Parameter	Symbol	Rating	Unit


≠ ∃ ̃Ạ´E ∀ ƒ / Electrical Characteristic Curve

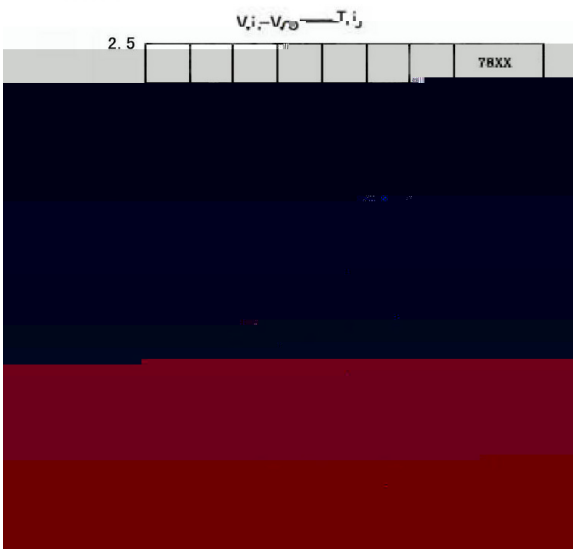


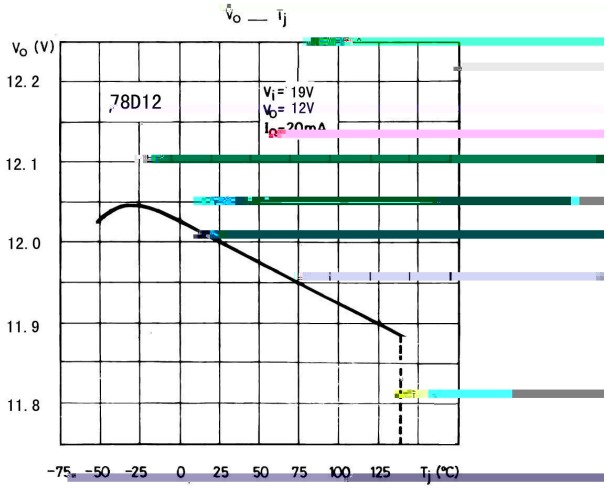

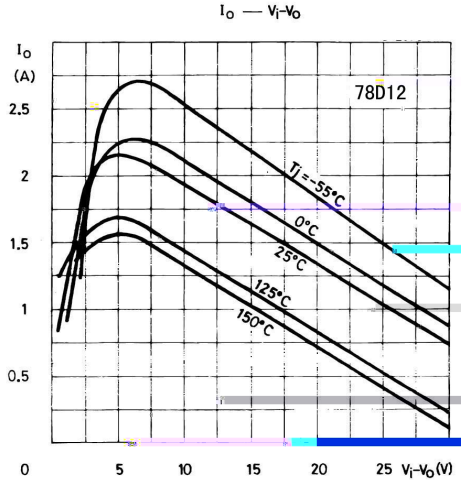


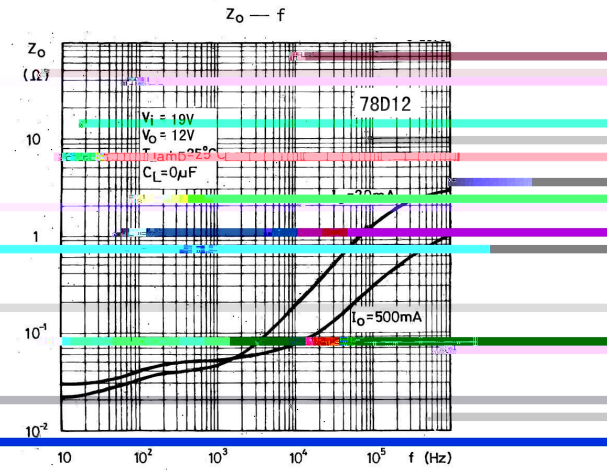

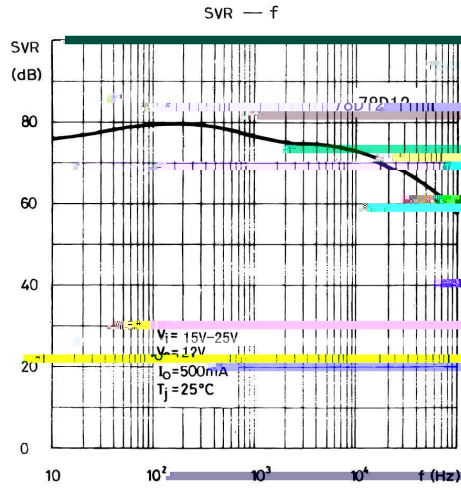

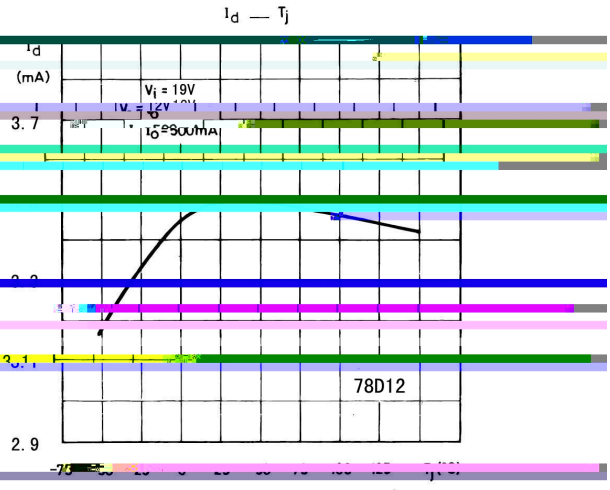

ᵘ ĖÒĻ ƒ / Package Dimensions

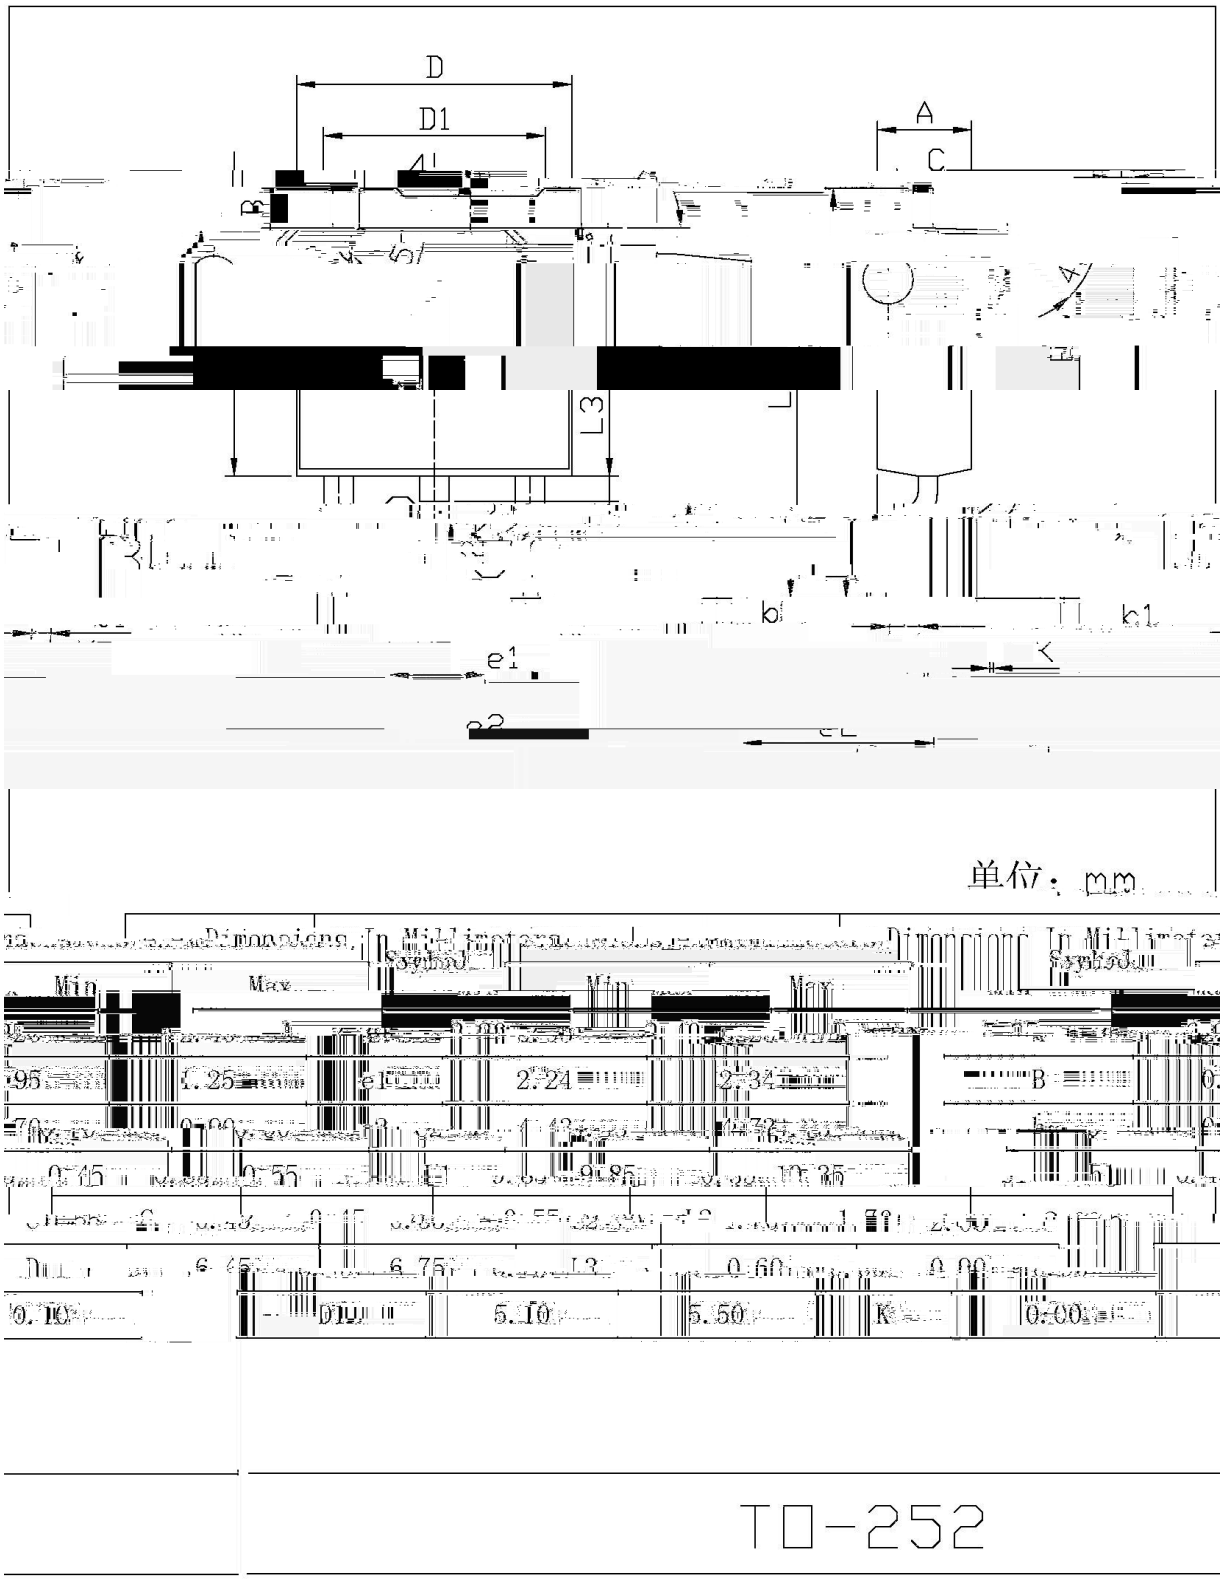

78D12

ℎ ∫ ╕ẘ´E ⅵ ƒ (ᾠ ƨ) / Wh p shudwxuh Suriloh iru LU Uhio r z Vroghulq j+Se0luhh,

Note:

1	150 180 60 90sec;	1.Preheating:150~180 , Time:60~90sec.
2	245 5 5 0.5sec;	2.Peak Temp.:245 5 , Duration:5 0.5sec.
3	2 10 /sec.	3. Cooling Speed: 2~10 /sec.

⅃ ü q ‾ `Y Ţ / Resistance to Soldering Heat Test Conditions

260 5	10 1 sec.	Temp.:260±5	Time:10±1 sec

ɒ Ŀ ⊱— / Packaging SPEC.

/ REEL