

Parameter	Symbol	Rating	Unit
Input voltage	V_I	30	V
Output current	I_O	100	mA
Operating virtual Junction temperature	T_J	0 125	
Power Dissipation	P_D	500	mW
Storage temperature range	T_{stg}	-65 150	


н þ

Parameter Symbol


/ Electrical Characteristic Curve

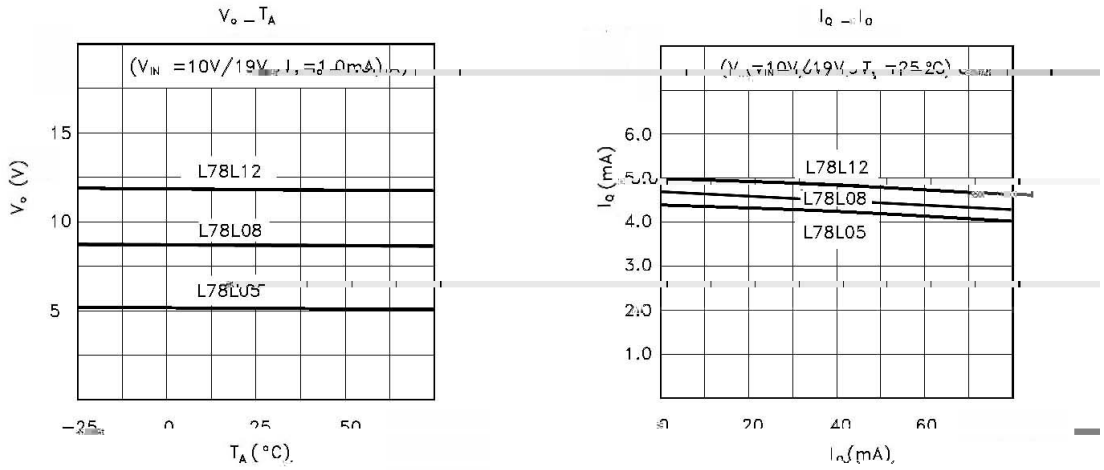

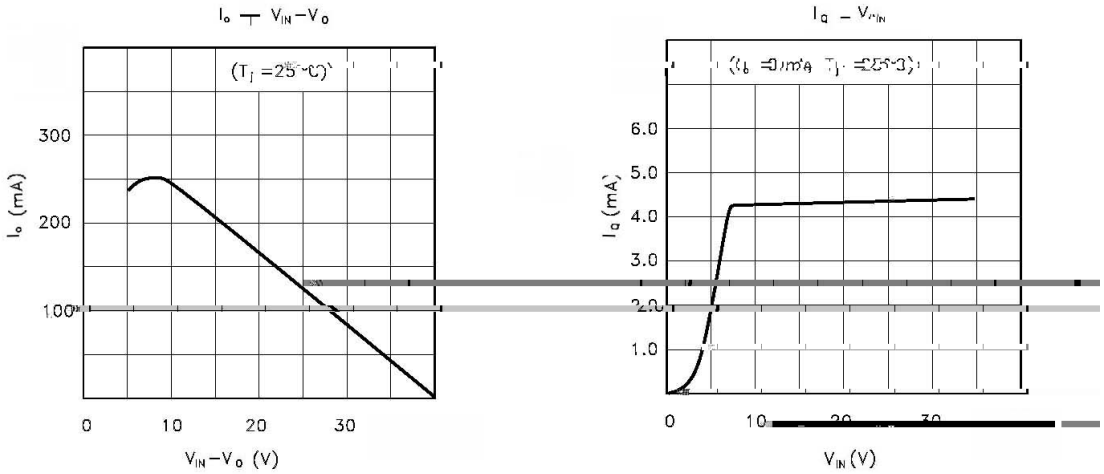


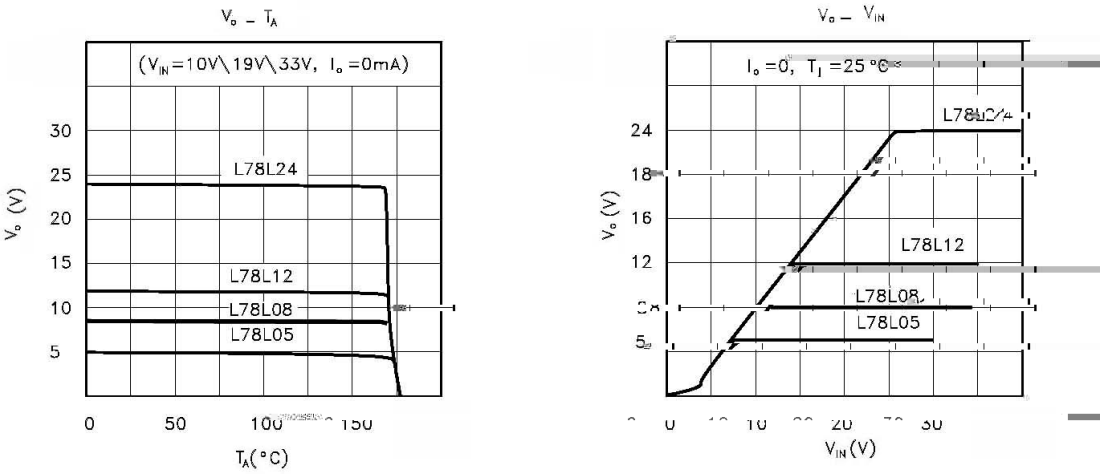

/ Package Dimensions

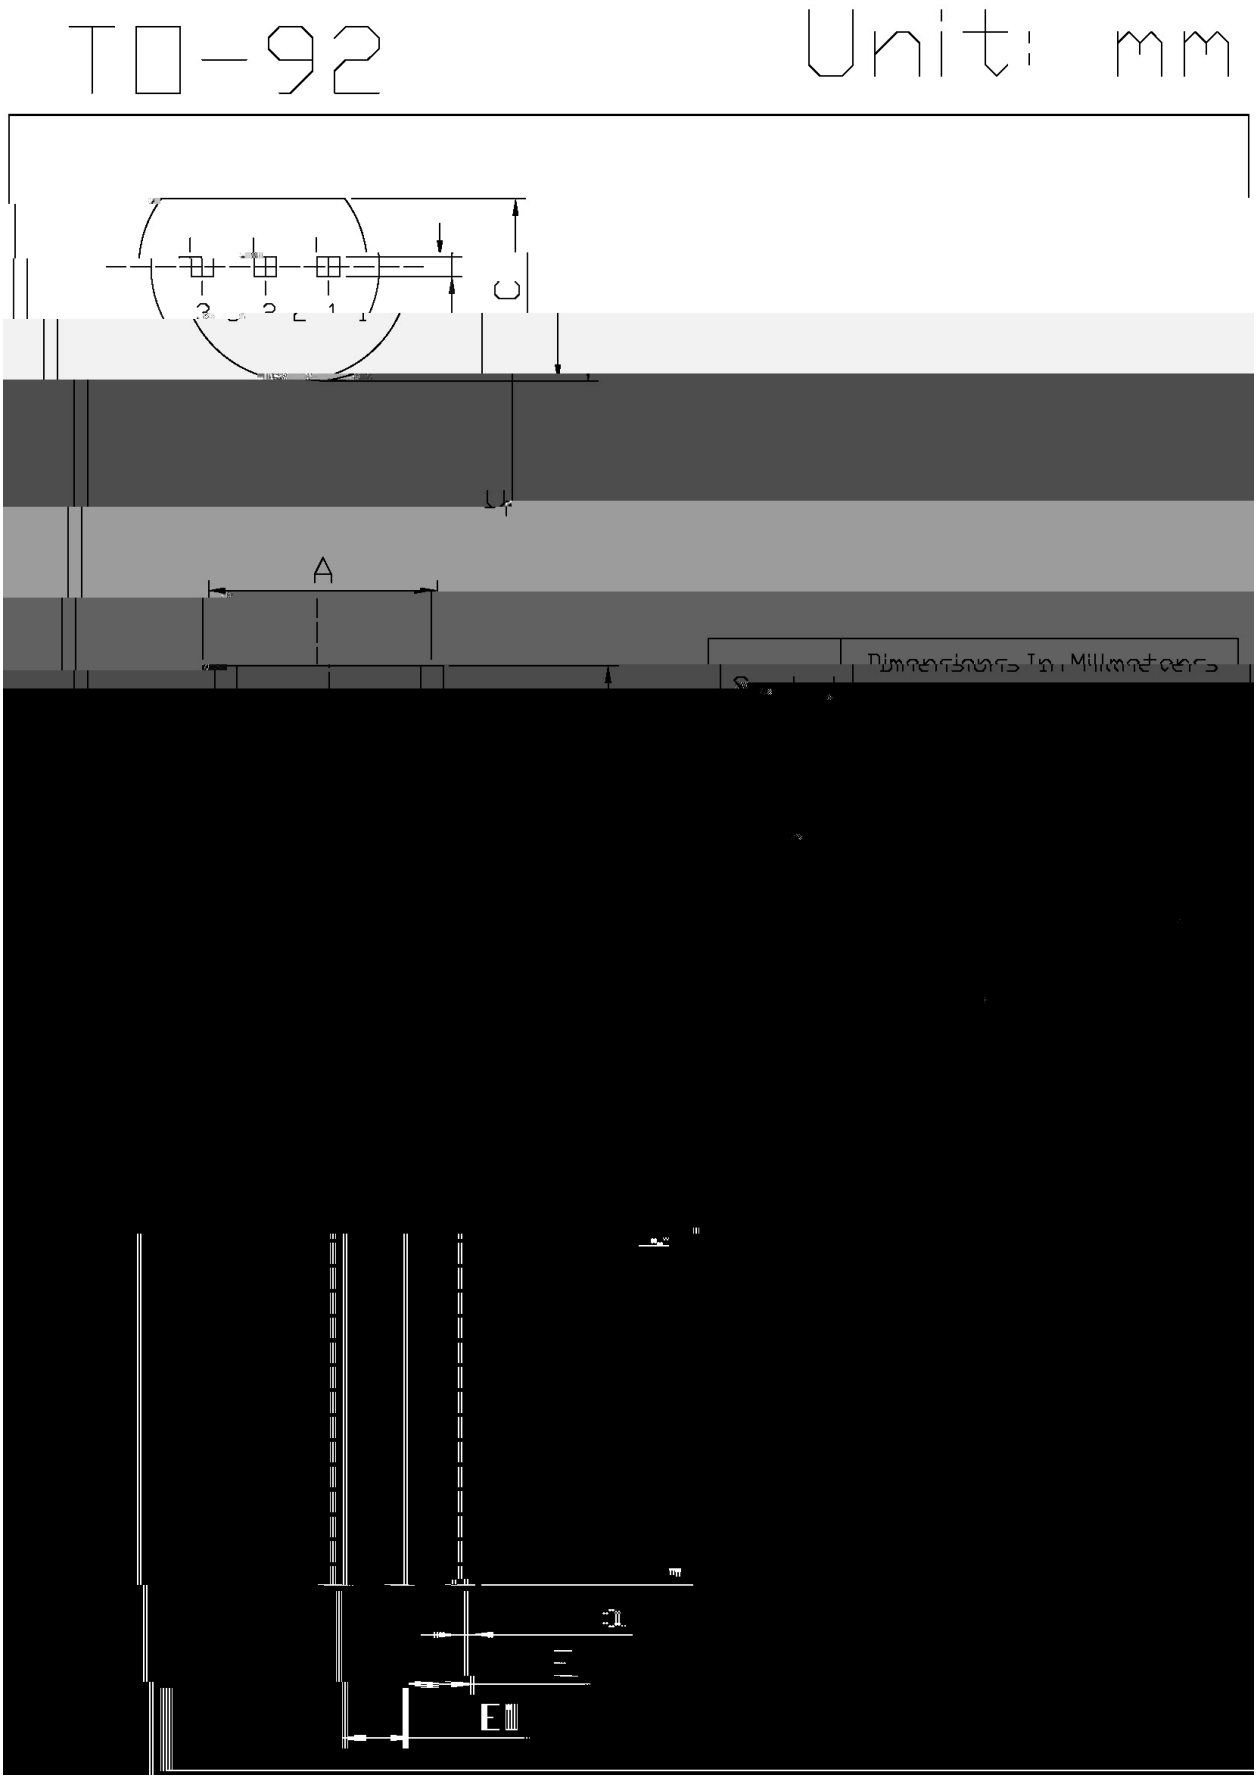

/ Marking Instructions

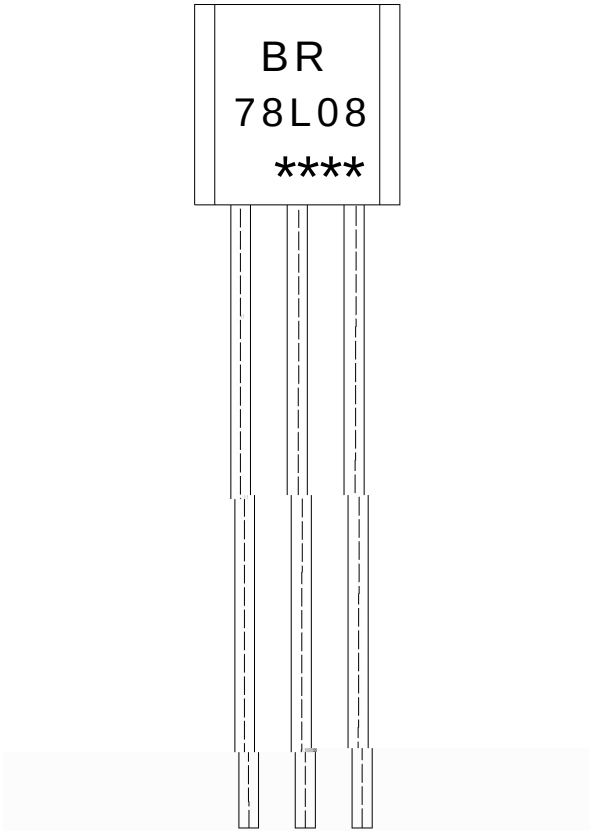

BR


78L08

****

Note:

BR:	Company Code.
78L08:	Product Type.
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

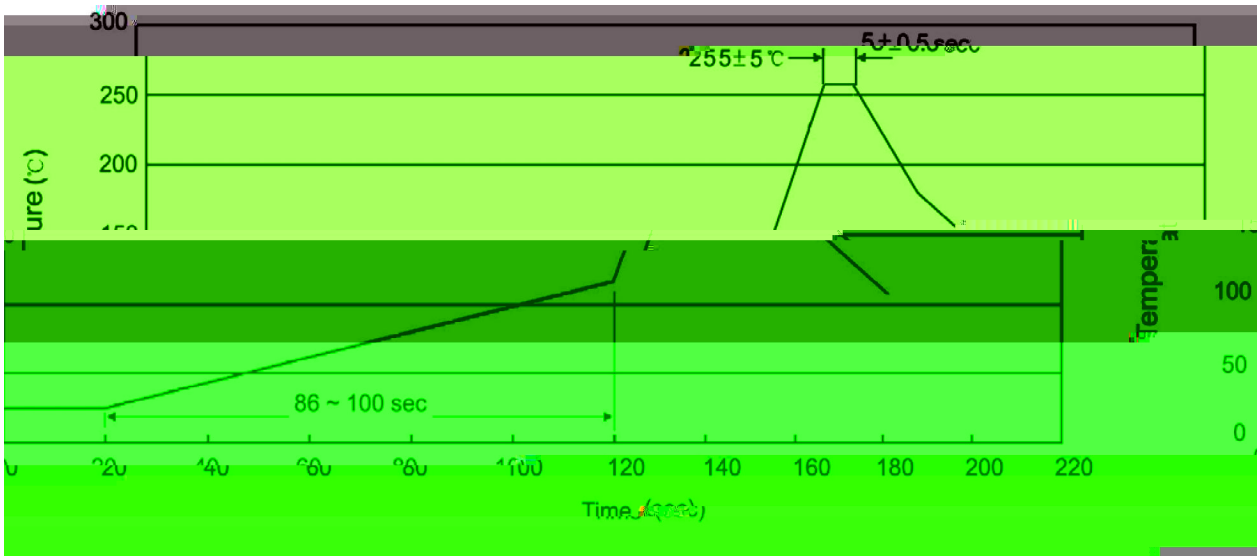

				Note:	
1	25	150	60 90sec;	1.Preheating:25~150	, Time:60~90sec.
2	255±5		5±0.5sec;	2.Peak Temp.:255±5	, Duration:5±0.5sec.
3		2 10	/sec.	3. Cooling Speed: 2~10	/sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm3)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type	Units					Dimension	(unit mm3)
	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92	3,000	1	120	10	30,000	328×230×42	480×346×235 547×407×268

/ Notices