/ Descriptions

2.0A ABS/LBF

2.0A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.

/ Features


100V~1000V 2.0A

Glass Passivated Chip Junction,Reverse Voltage:100to1000V,Forward Current:2.0A,High Surge Current Capability,Designed for Surface Mount Application, Halogen free product.


/ Applications

General purpose.


/ Equivalent Circuit



/ Pinning

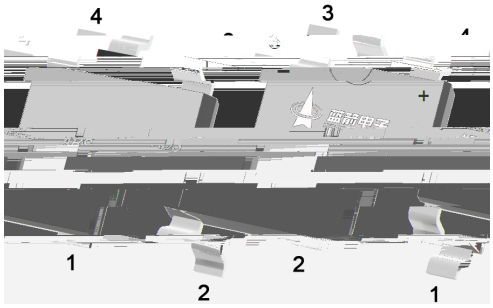

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
3	Output Anode

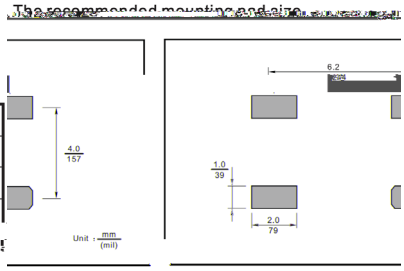

/ Marking

See Marking Instructions.

Parameter	Symbol	Rating						Unit
		ABS201	ABS202	ABS204	ABS206	ABS208	ABS210	

ABS201~ABS210

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

1	150	180	60