## / Descriptions


TO-126F PNP

## / Features


BD433

## / Applications

## / Equivalent Circuit





## / Pinning






## / $h_{FE}$ Classifications & Marking

| | | | |
|---|---|---|---|
| | | | |

## / Electrical Characteristic Curve

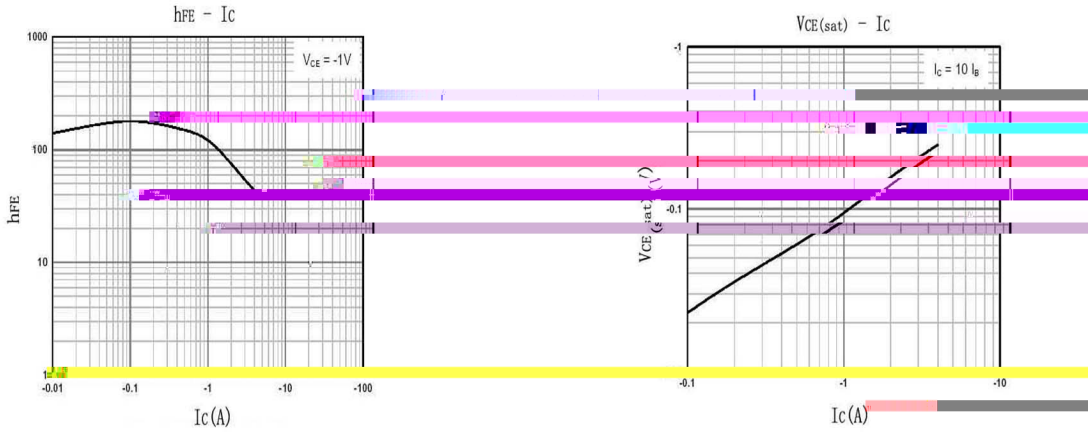


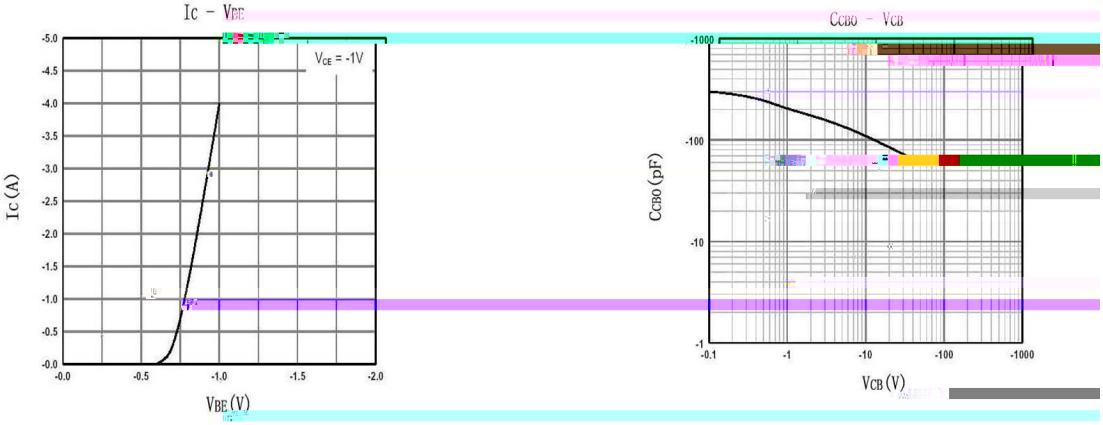
## / Package Dimensions

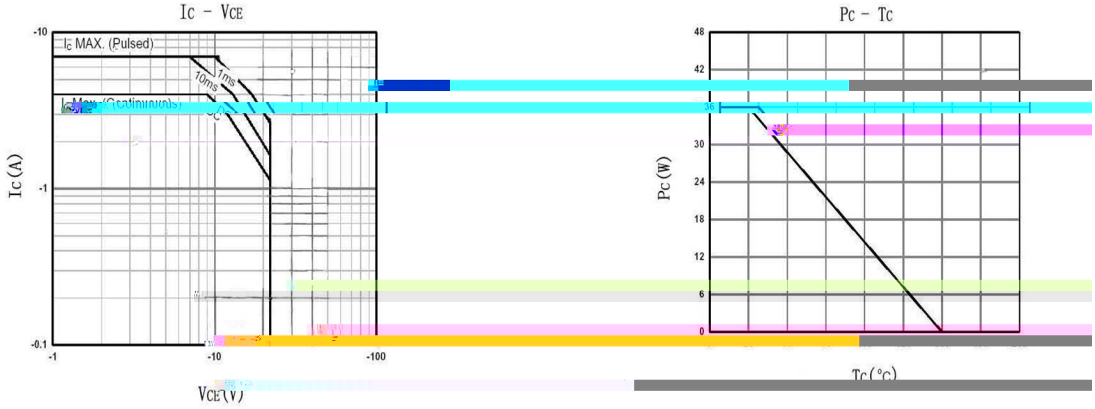TO-126T 单位：mm




| Symbol | Min | Max | Symbol | Min |
|---|---|---|---|---|
| | | 0.86 | A | 7.8 | 8.2 | a1 | 0.66 |
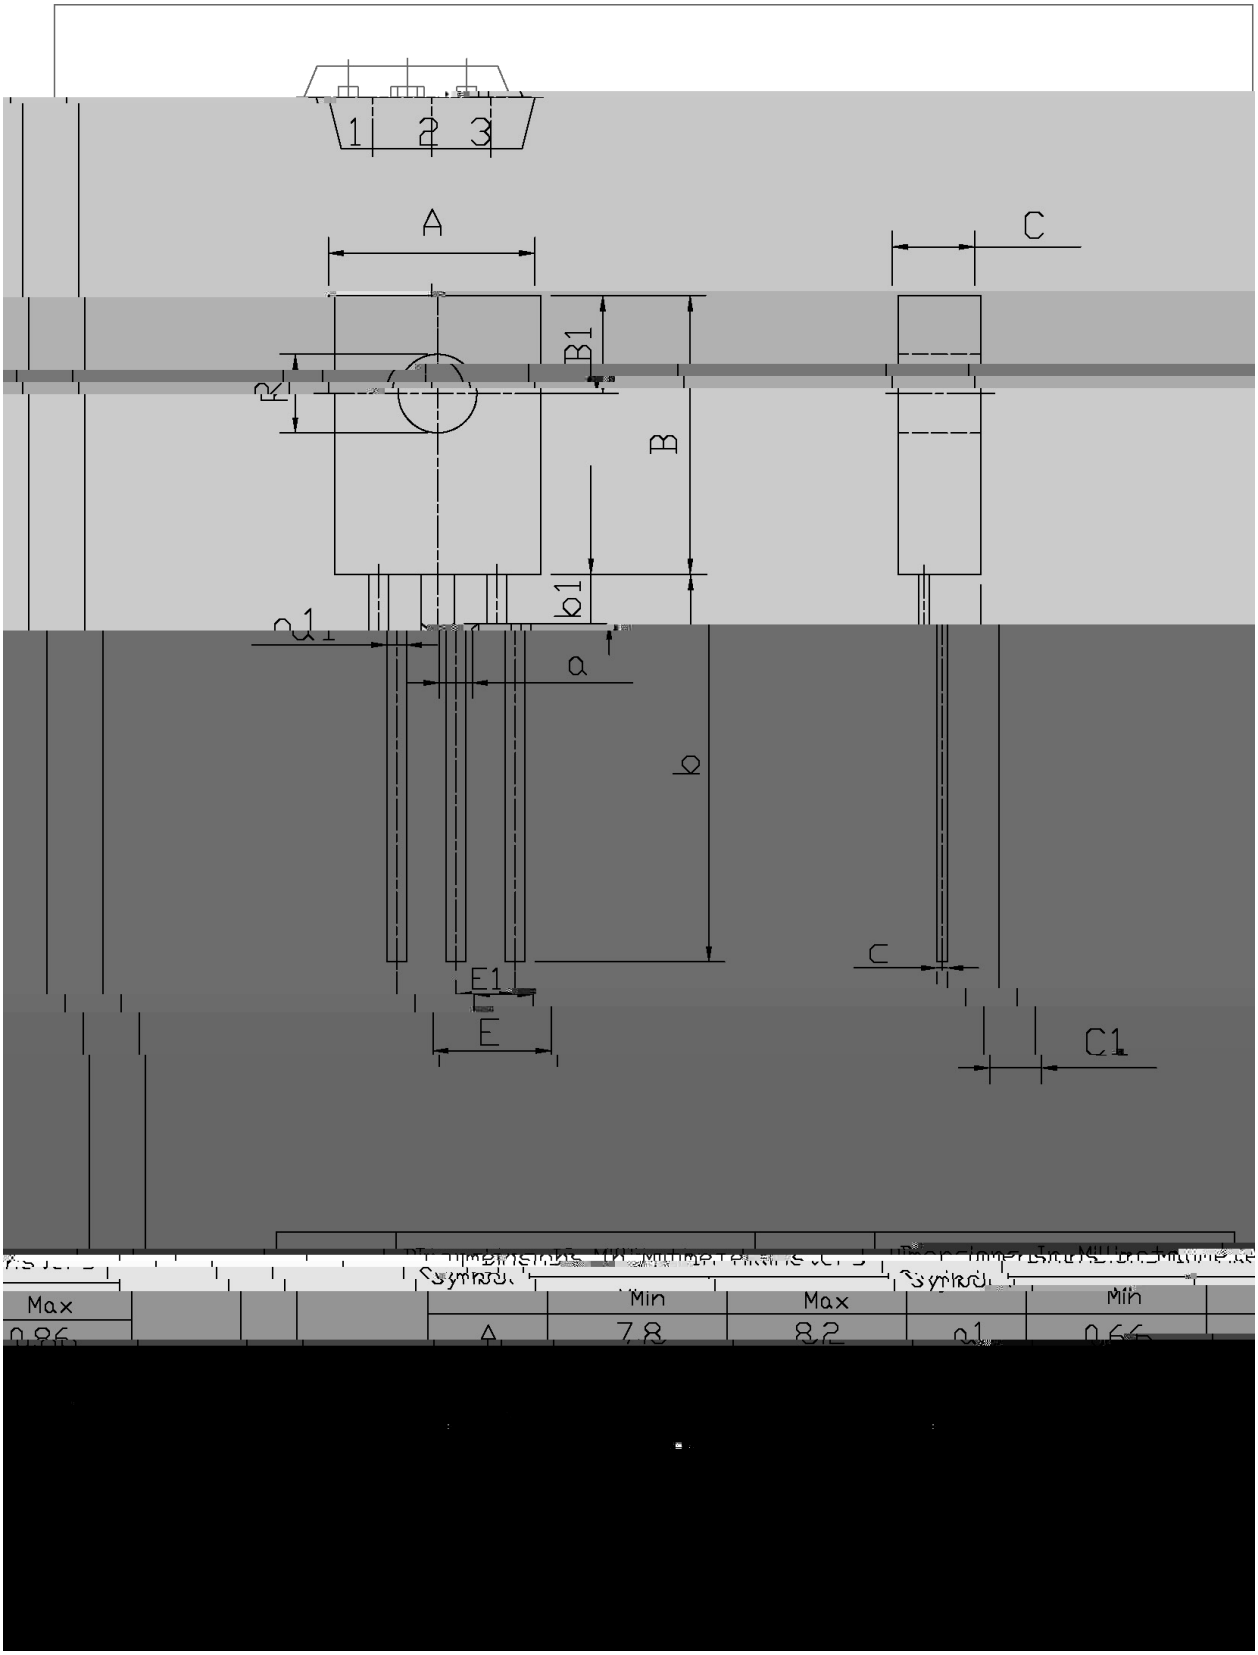
## / Marking Instructions

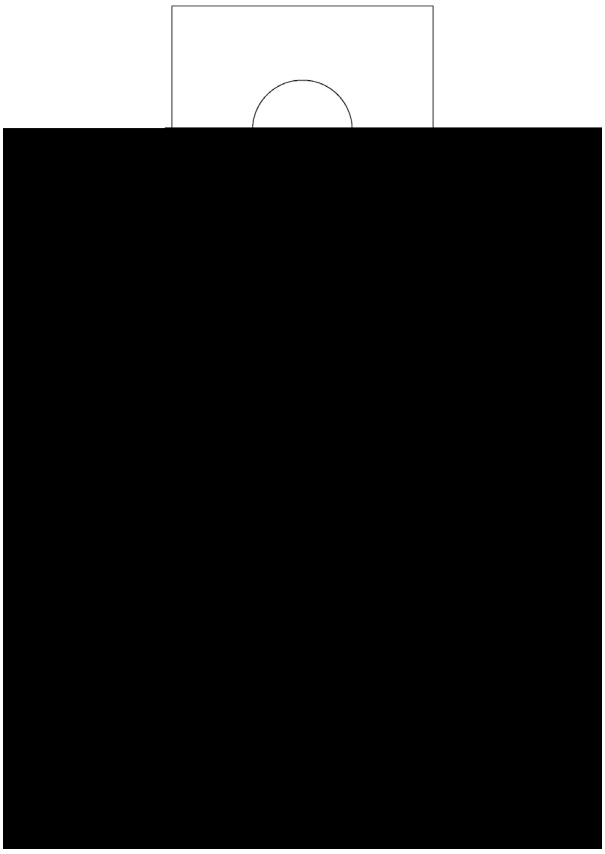


BR

BD434

****

## ( ) / Temperature Profile for Dip Soldering(Pb-Free)

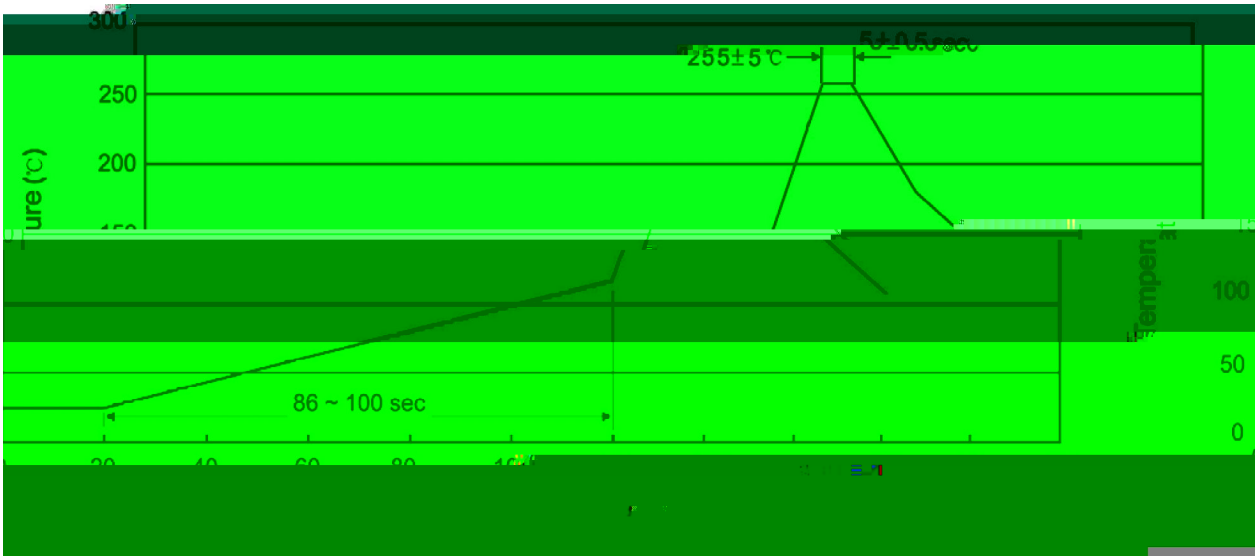


± ± ± ±

## / Resistance to Soldering Heat Test Conditions

± ±

## / Packaging SPEC.

| | Units/Tube / | Tubes/Inner Box / | Units/Inner Box / | |
|---|---|---|---|---|