



v ˝Ǫ Parameter	ϒ N Symbol	˝Ǫ Ө Rating	D Ꮉ Unit

/ Electrical Characteristic Curve

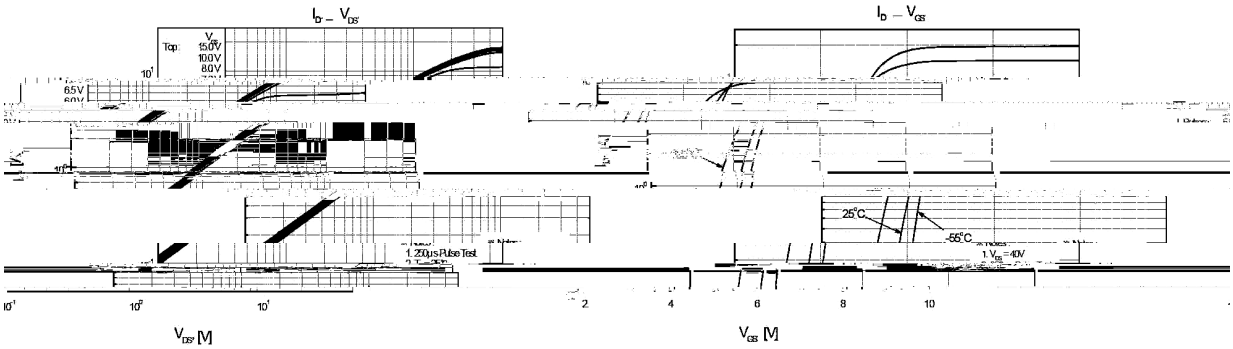


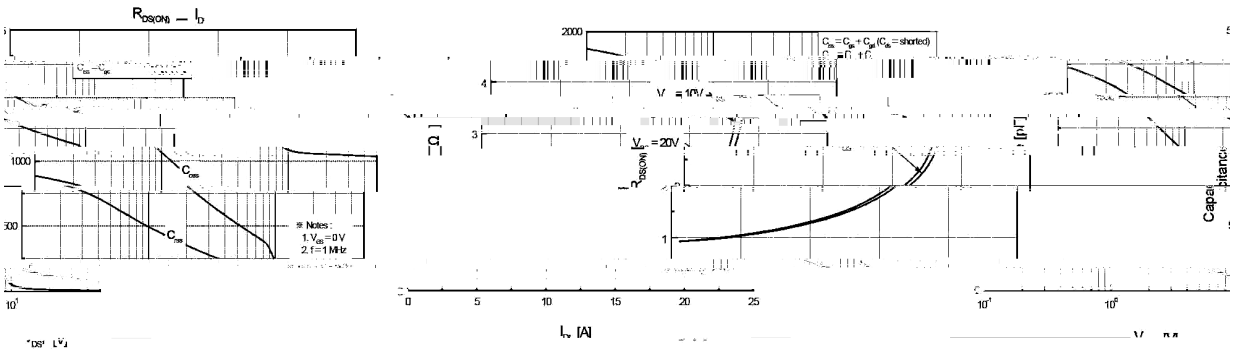

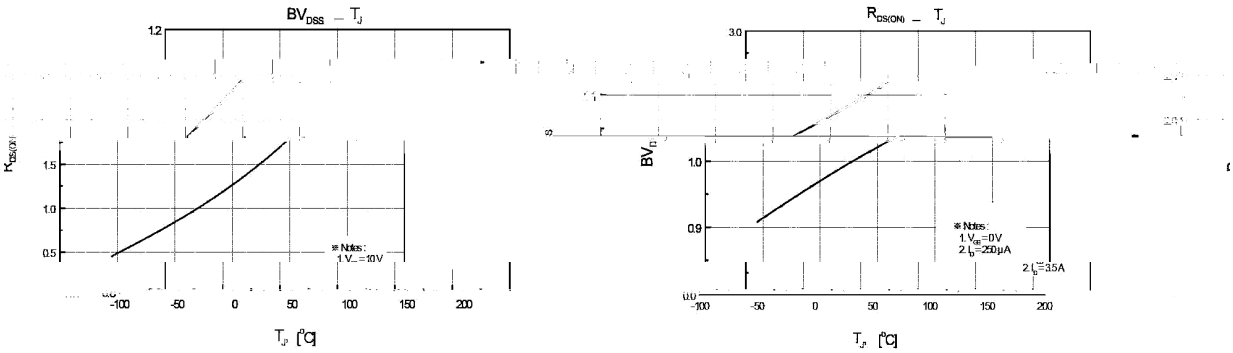

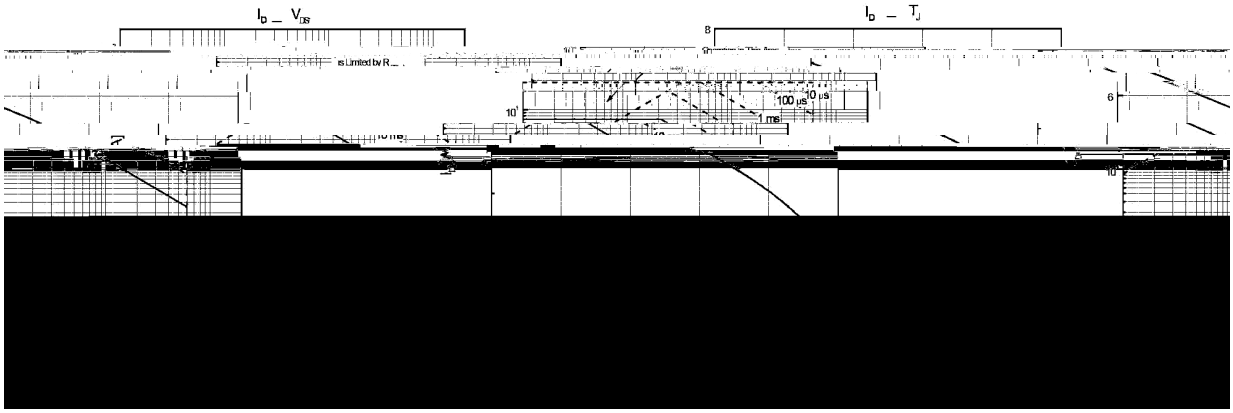


/ Package Dimensions

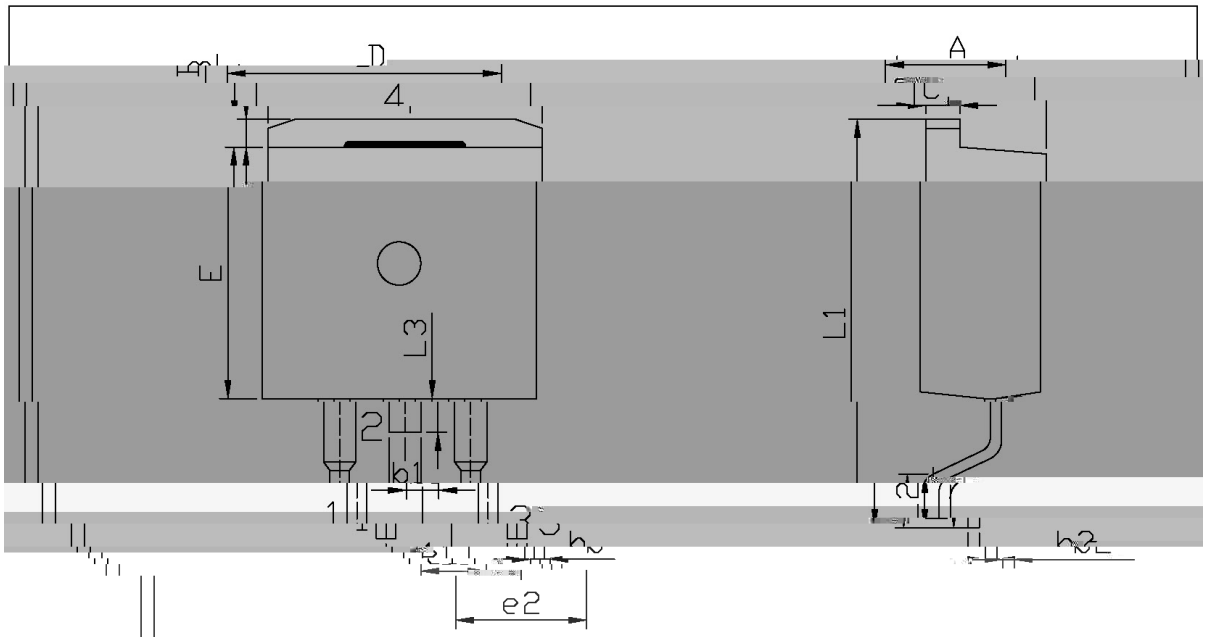

单位：m

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	4.30	4.70	L	9.00	9.40
B	1.00	1.40	e1	2.34	2.74

/ Marking Instructions

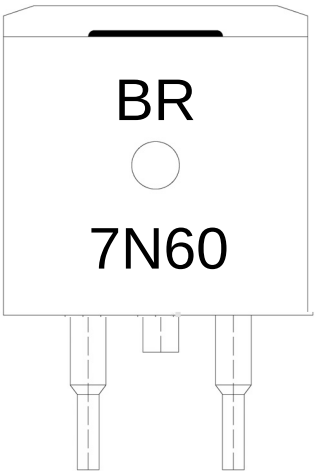


ᄂ ᄇ χ	
BR χ	ᄒᄎ ᄀᄂ ᄋᄀᄃ
7N60 χ	ᄒᄎ ᄀᄃ ᄂᄀᄃ
---- χ	ᄒᄎ ᄋ ᄒ ᄆᄂ ᄂᄀᄃ ᄋ ᄐ ᄋ ᄒ ᄆᄂ ᄂ ᄑ ᄁ

Note:

BR:	Company Code
7N60:	Product Type.
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

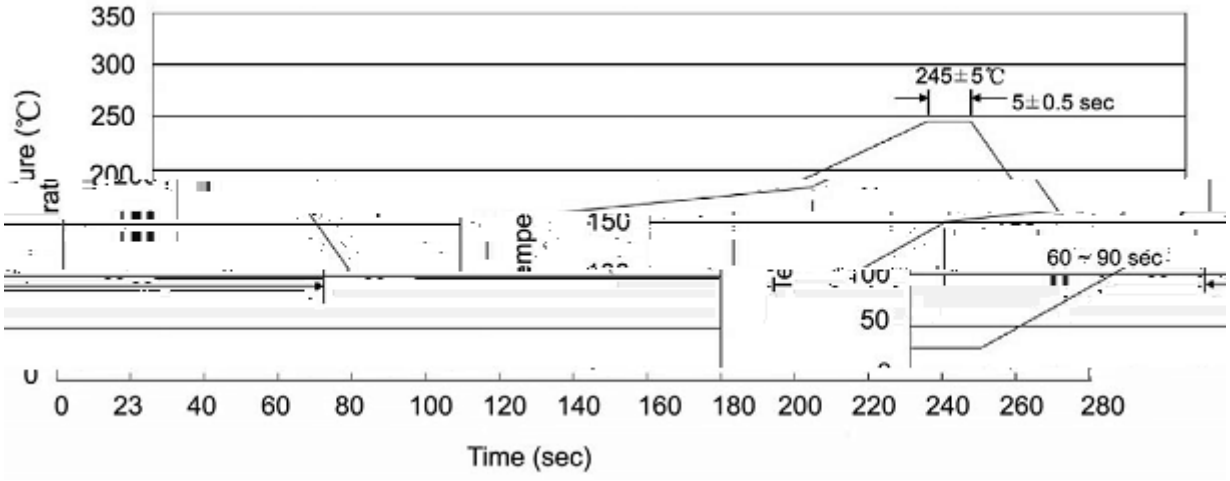

ب ˝ χ

1 Ĺ ♬ □ ỷ 25 Ḱ 150 ł ı ˋH ڑ 60 Ḱ 90sec;

2 Š Ө □ ỷ 245 ° 5 ł ı ˋH ڑ ˋY ﾊ ㎞ 5 ° 0.5sec;

3 ì ˙ ｲ ˛ ɔ ﻉ ỷ ㎞ 2 Ḱ 10 ł /sec.

Note:

1.Preheating:25~150 ł , Time:60~90sec.

2.Peak Temp.:245 ° 5 ł , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ł /sec.

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ 260 ° 5 ł	ˋH ڑ χ 10 ° 1 sec.	Temp.:260±5	Time:10±1 sec

/ Packaging SPEC.

ɔ ` ｙ Ł / REEL

Package Type	Units					Dimension		(unit mm³)

˛ ｱ ｙ Ł / TUBE

Package Type	Units					Dimension		(unit mm³)