Parameter	Symbol	Rating	Unit
Repetitive Reverse Voltage	V_{RRM}	250	V
Reverse Voltage Working Peak Reverse Voltage	V_R V_{RWM}	200	V
RMS Reverse Voltage	VR 2 0 0 3 (V)] T J E T 5 5 . 4 6		

MTryd S3.6(p)-60.4( )]TJ/TT9 1 Tf2

Symbol


Parameter

	RVu] µ		


T =e 01514.9( )766(f)14MHz

V


/ Electrical Characteristic Curve

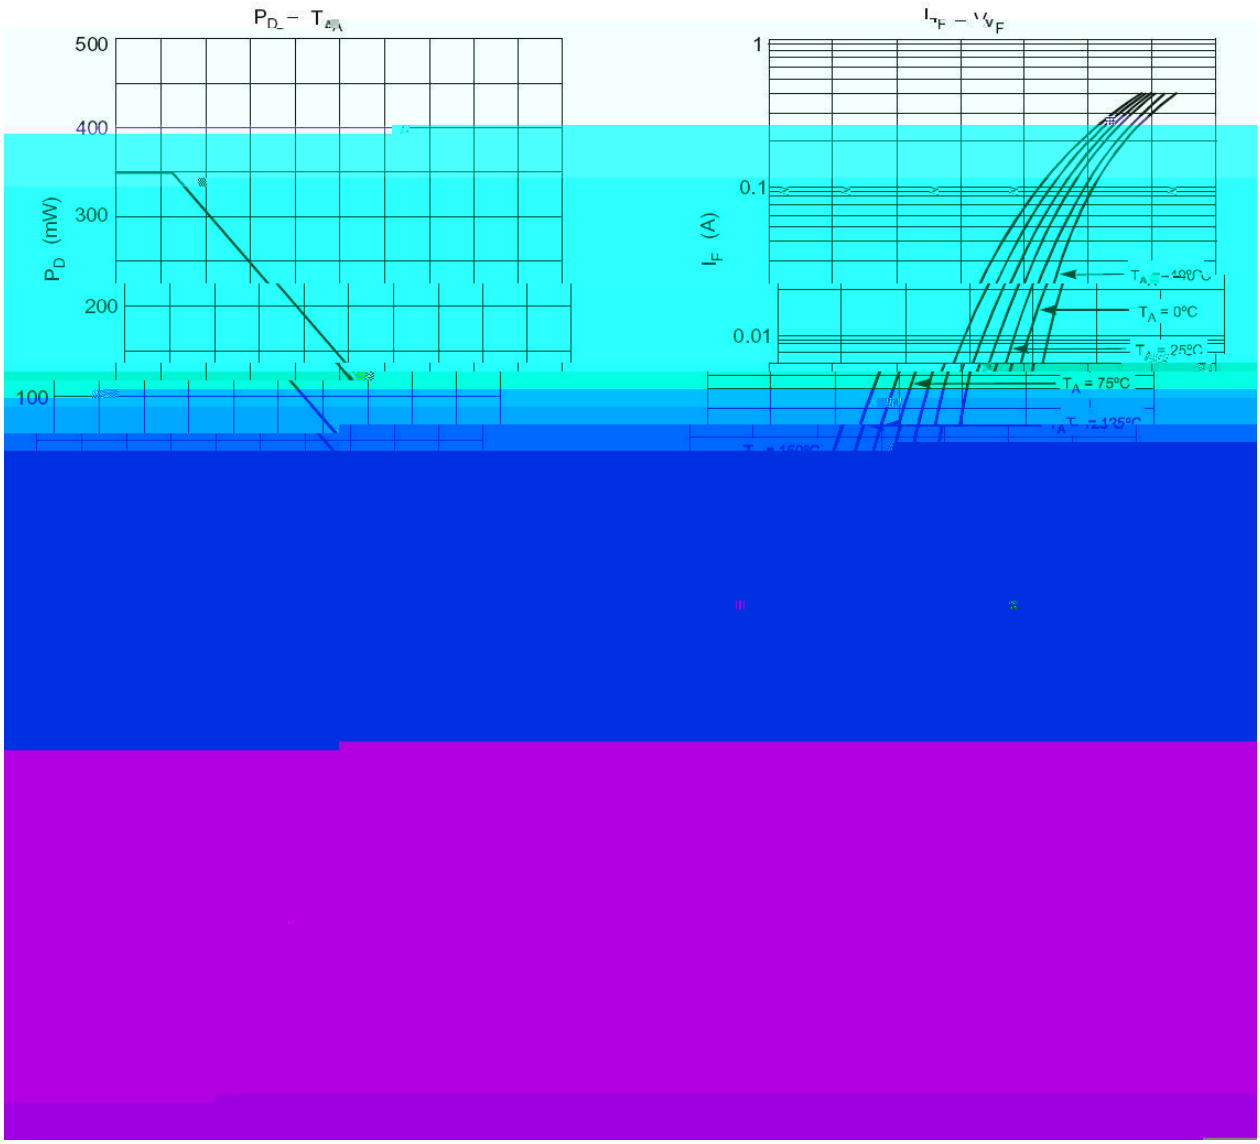

/ Package Dimensions

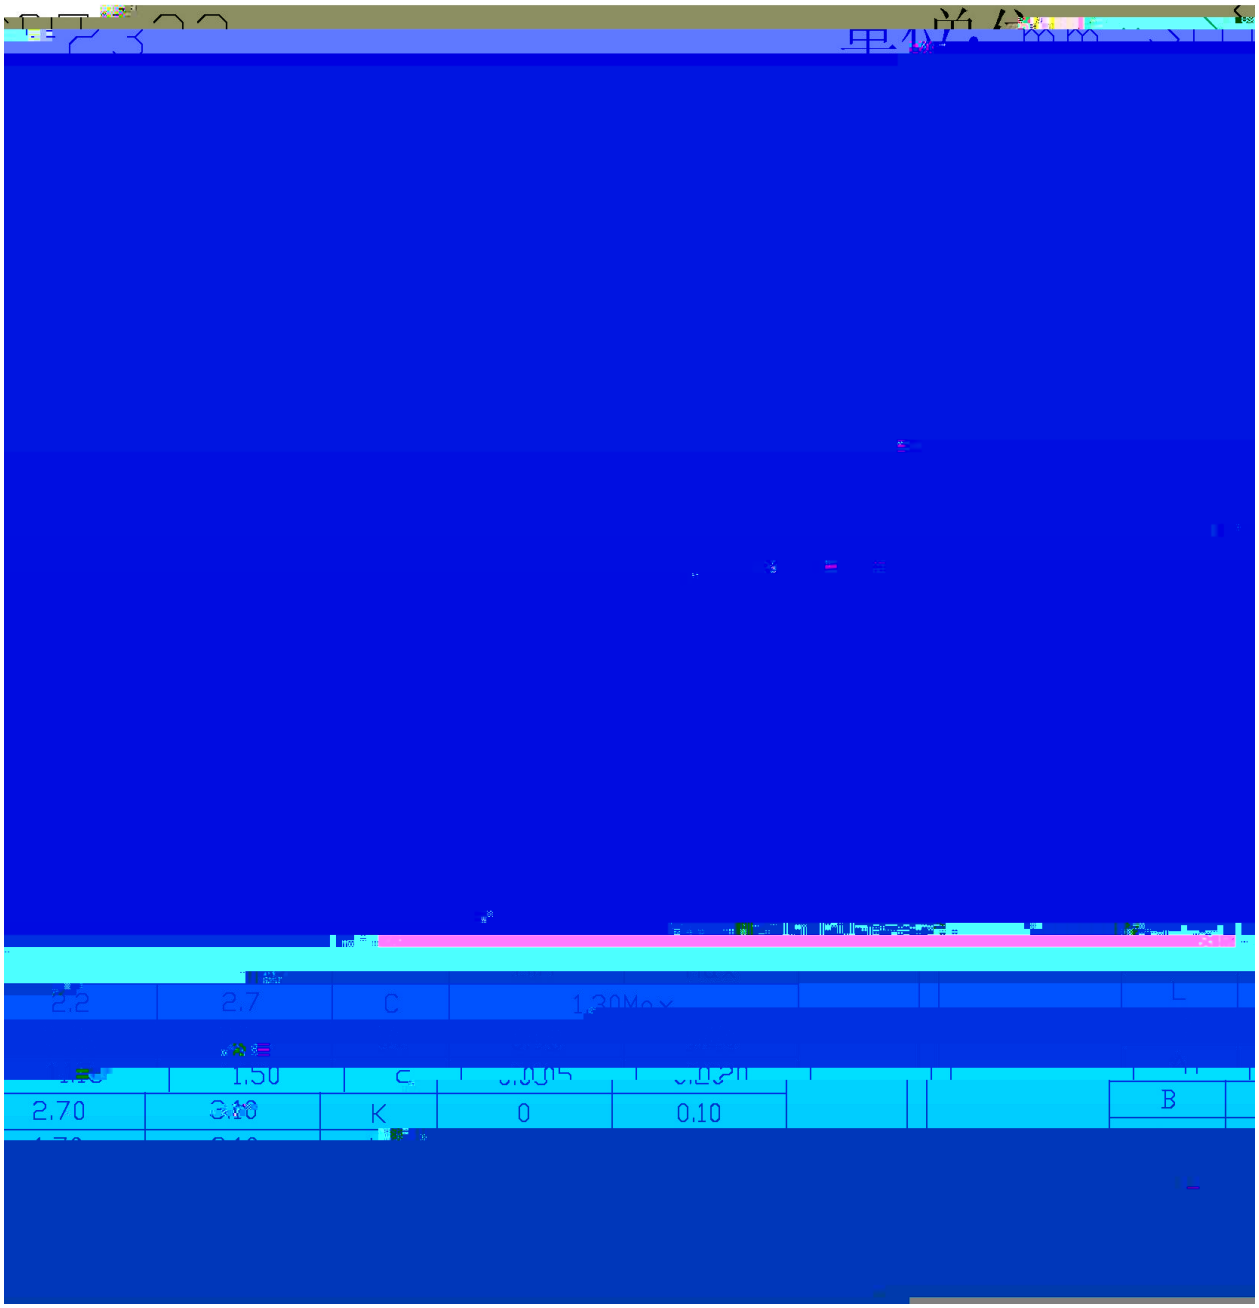

/ Marking Instructions

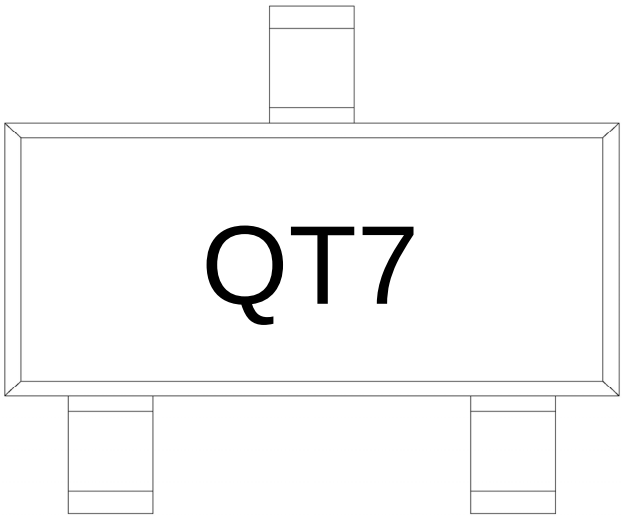

Q

T7

Note:

Q: Automobile halogen-free product Code

T7: Product Type

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

1	150 200 60 120sec;	1.Preheating:150~200 , Time:60~120sec.
2	255±5 5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3	2 10 /sec.	3.Cooling Speed: 2~10 /sec.