/ Descriptions

PDFN5Ö6 Ṃ Ł N ڜ ʃ ѽ Ẓ ٦
N-Channel MOSFET in a PDFN5×6 Plastic Package.


/ Features

V_{DS}(V)=60 V I_D=158A
$R_{DS(ON)}$@10V≤2.0mΩ(Typ.1.8mR)
$R_{DS(ON)}$@4.5V≤3.0mΩ(Typ.2.5mR)
ṇ ꜰ β HF Product.


/ Applications

Ⱪ ٨ Ӧ ª ℓ Ꝟ Ꝗ ╙ ı GF0GF Ψ Ꝟ ʜ ı ↄ í ı ق ڏ Ꝟ
Secondary Side Synchronous Rectification,DC-DC Converter,Motor Control,Load Switching.

/ Equivalent Circuit



/ Pinning

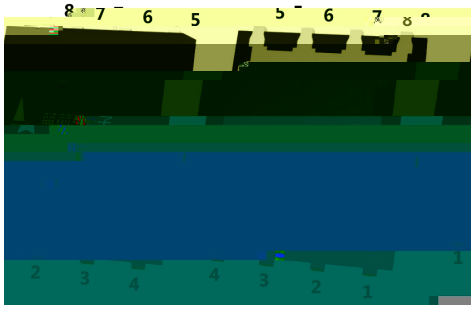

PIN1 2 3 S PIN4 G PIN5 6 7 8 D

/ Marking

ծ ᴍ ٦ ب ˝
See Marking Instructions.

/ Absolute Maximum Ratings(T_a=25)

v ̈Ω Parameter		٩ N Symbol	̈Ω Ö Rating	D Ч Unit
Drain-Source Voltage		V_{DS}	60	V
Continuous Drain Current		I_D(Tc=25)	158	A
Pulsed Drain Current		I_{DM}	316	A
Gate-Source Voltage		V_{GS}	± 20	V
Power Dissipation		P_D(T_c=25)	90	W
Avalanche energy(L=0.5mH)		E_{AS}	380	mJ
Avalanche Current(L=0.5mH)		I_{AS}	30.8	A
Junction and Storage Temperature Range		T_j, T_{stg}	-55 to 150	ł
Maximum Junction-to-Ambient	t ≤ 10s	$R_{\theta JA}$	20	/ W
	Steady-State		57	
Maximum Junction-to-Case	Steady-State	$R_{\theta JC}$	1.39	


/ Electrical Characteristics(Ta=25)

v ̈Ω Parameter	٩ N Symbol	╜ :ˆ Ţ Test Conditions	ω ṇ Ö Min	Ɛ ʒ Ö Typ	ω ᶻ Ö Max	D Ч Unit
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=250μA	60	65		V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=60V V_{GS}=0V			1	μA
Gate-Body Leakage Current Forward	I_{GSS}	V_{GS}=±20V V_{DS}=0V			±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS} I_D=250μA	1	1.6	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	V_{GS}=10V I_D=20A		1.8	2.5	mΩ
		V_{GS}=4.5V I_D=10A		2.4	3.5	
Forward On Voltage	V_{SD}	V_{GS}=0V I_S=1A			1.2	V
Gate resistance	R_g	f=1MHz		1.0		Ω
Input Capacitance	C_{iss}	V_{DS}=25V V_{GS}=0V f=1.0MHz		6700		pF
Output Capacitance	C_{oss}			1400		
Reverse Transfer Capacitance	C_{rss}			70		
Total Gate Charge	$Q_{g(10V)}$	V_{GS}=10V, V_{DS}=30V, I_D=20A		60		nC
Total Gate Charge	$Q_{g(4.5V)}$			23		
Gate Source Charge	Q_{gs}			16		
Gate Drain Charge	Q_{gd}			3		


/ Electrical Characteristics(Ta=25)


v ̈Ω Parameter	ϒ N Symbol	⅄ :↾ ϯ Test Conditions	ѡ ṇ Ө Min	Ɛ ȝ Ө Typ	ѡ ᶻ Ө Max	ᴅ Ꮒ Unit
Turn-On Delay Time	$t_{d(on)}$	V_{GS}=10V V_{DS}=20V R_L=1Ω R_{GEN}=3Ω		13		ns
Turn-On Rise Time	t_r			4		
Turn-Off Delay Time	$t_{d(off)}$			47		
Turn-Off Fall Time	t_f			6.5		


/ Electrical Characteristic Curve

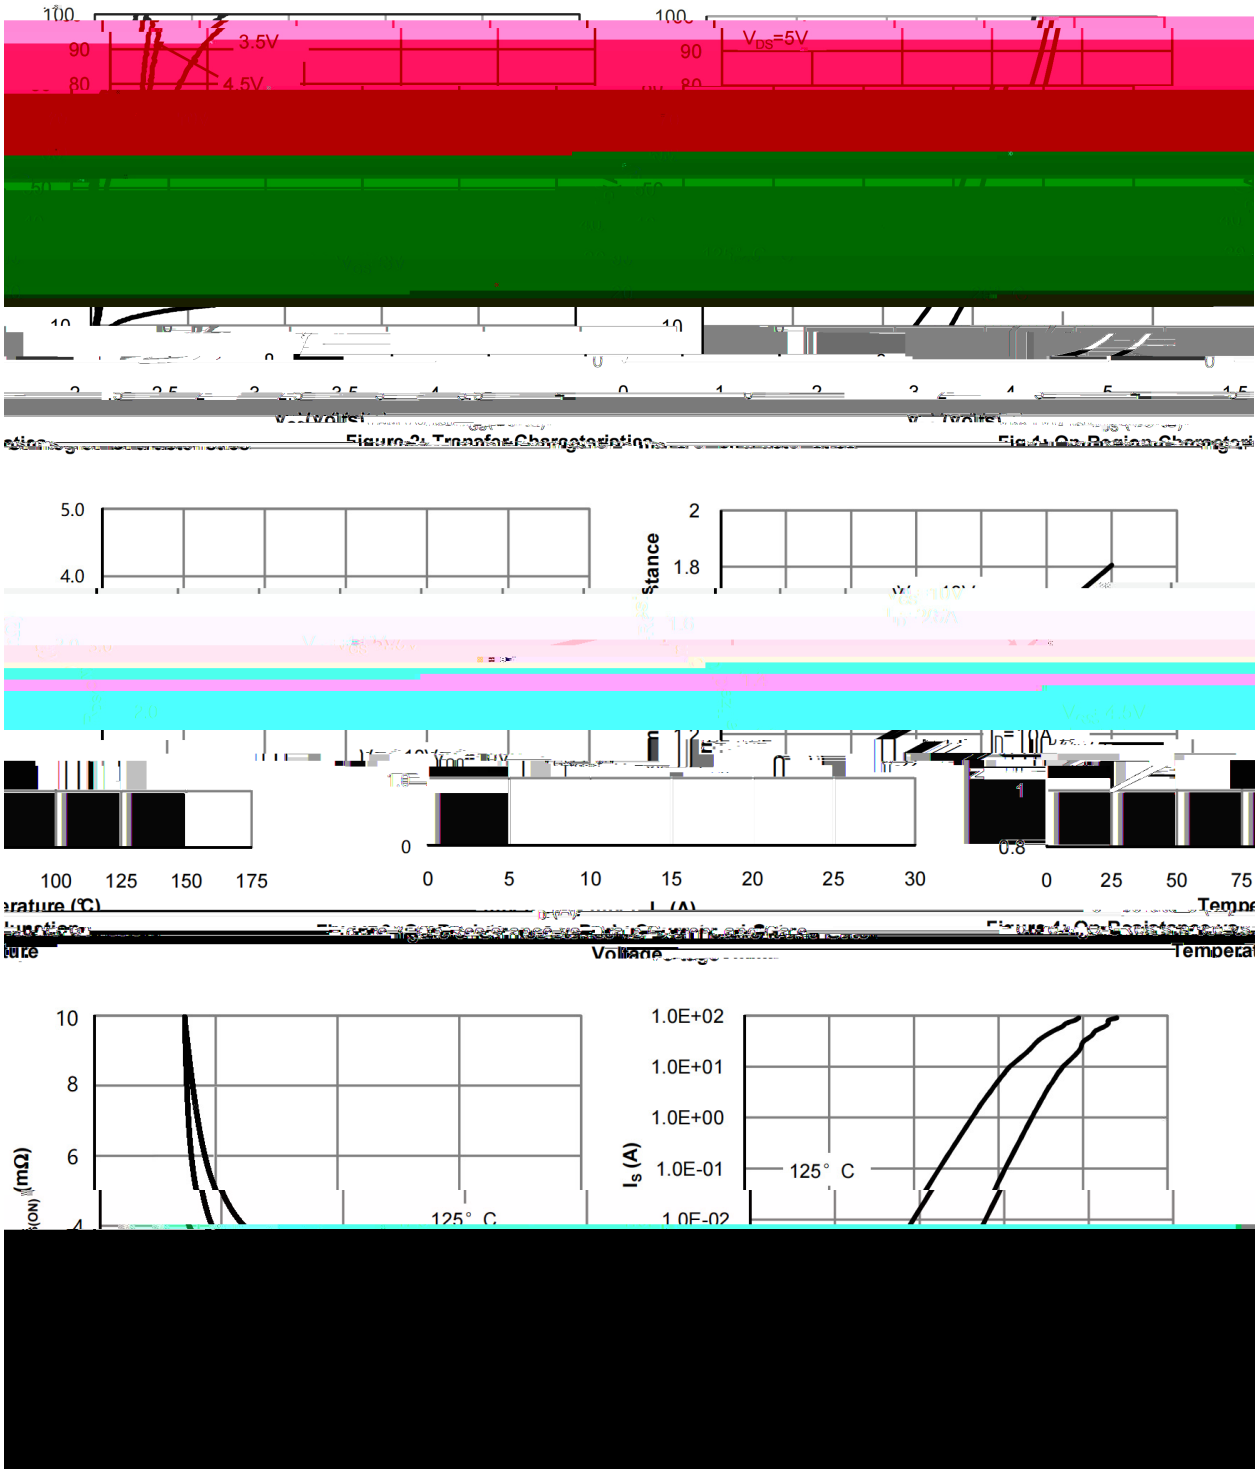

/ Electrical Characteristic Curve

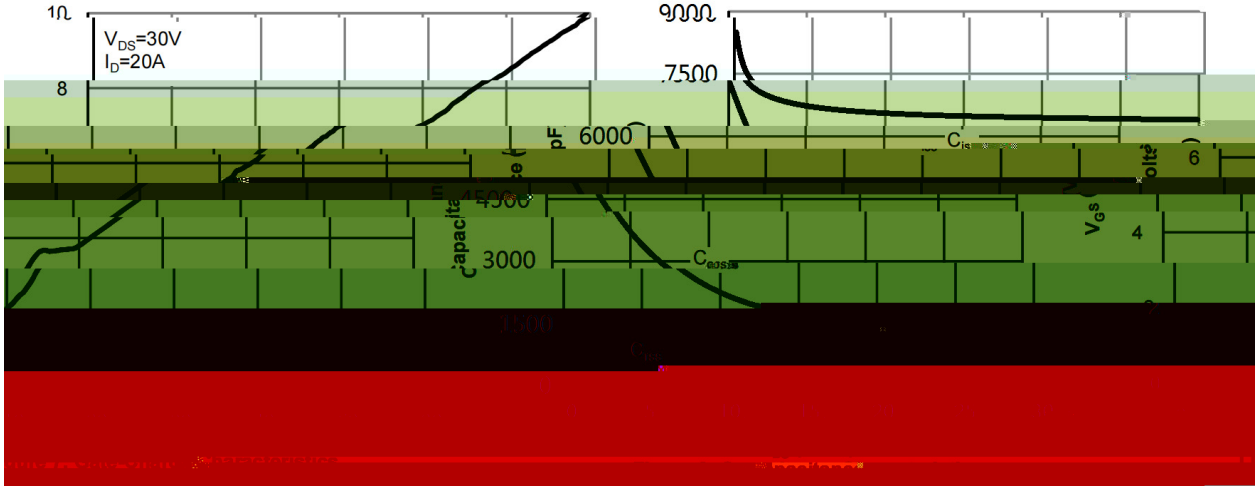


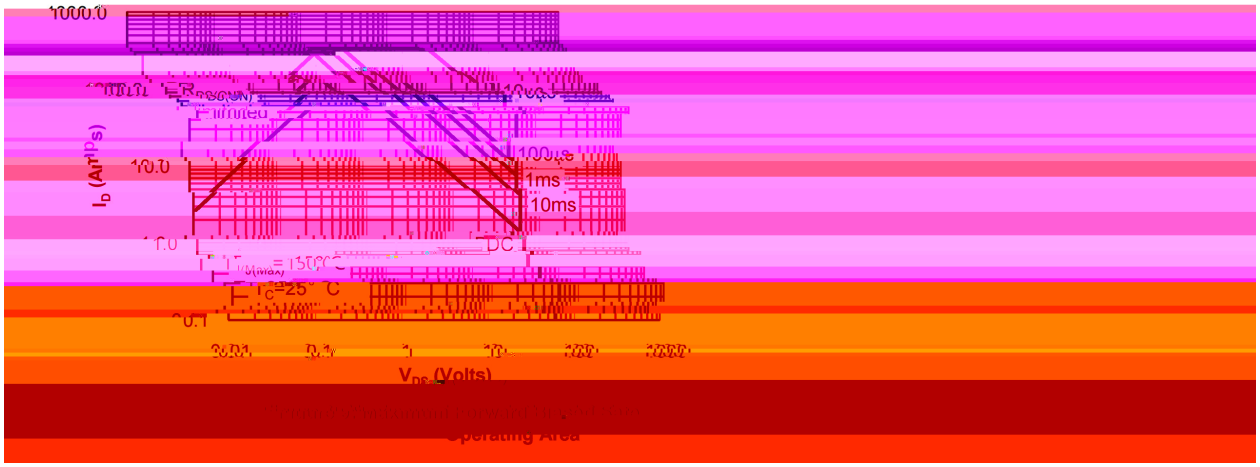

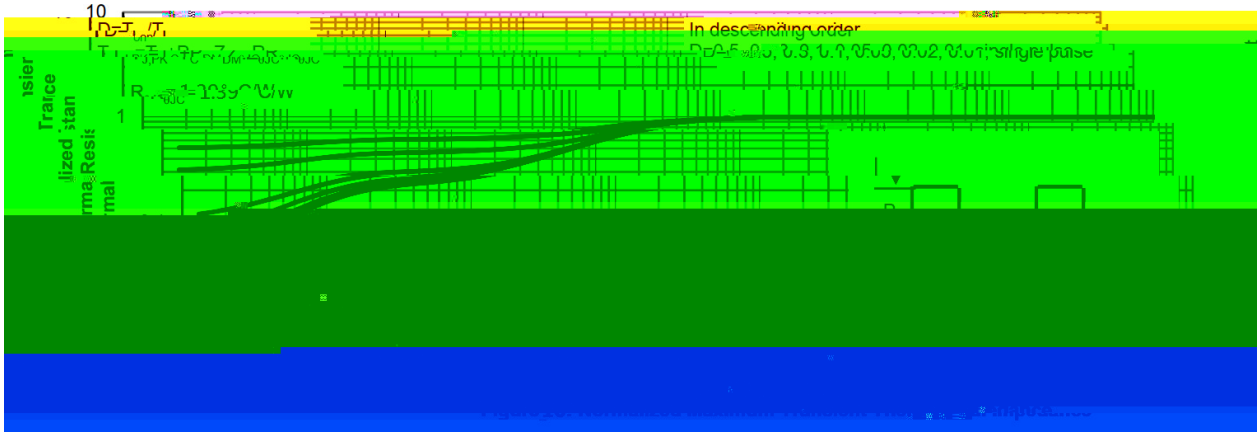

/ Package Dimensions

PDFN5×6 Unit:mm

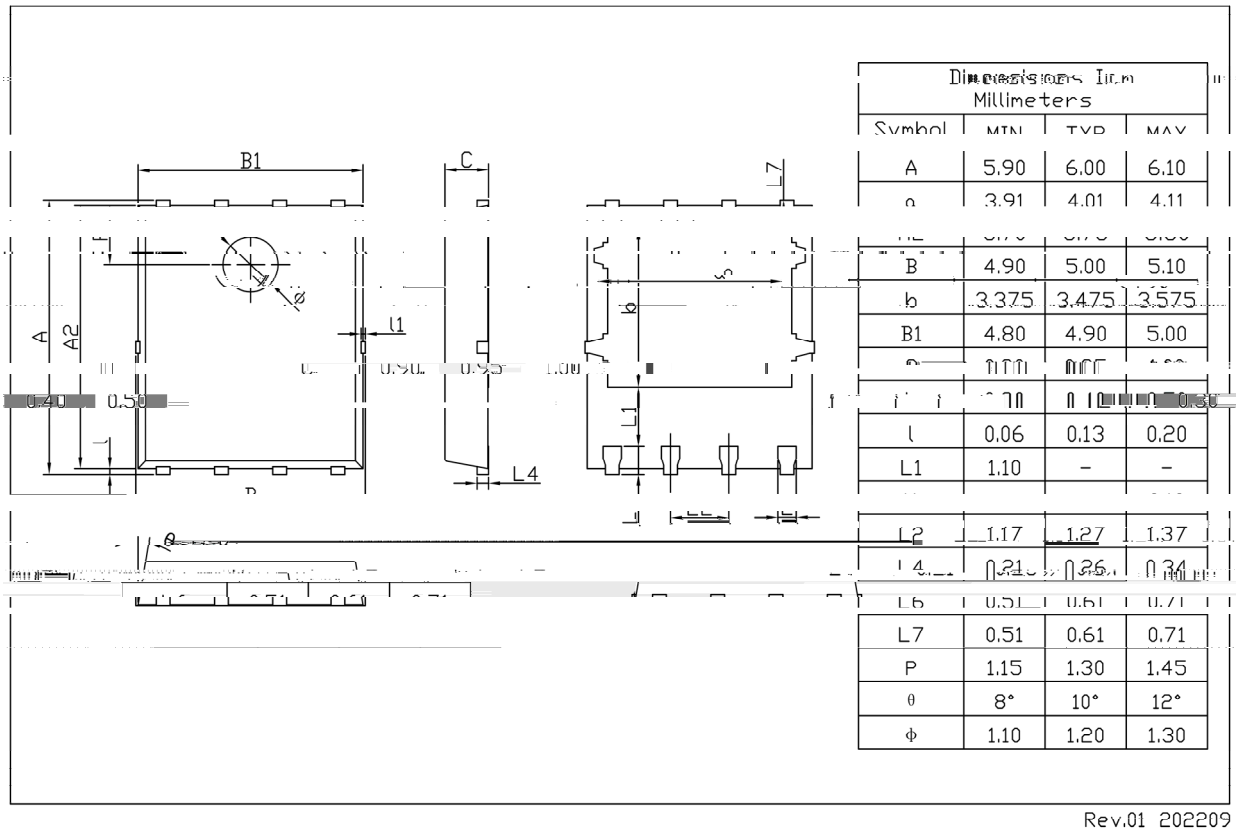


Dimensions In Millimeters			
Symbol	MIN	TYP	MAX
A	5.90	6.00	6.10
[illegible]	3.91	4.01	4.11
B	4.90	5.00	5.10
b	3.375	3.475	3.575
B1	4.80	4.90	5.00
[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]
l	0.06	0.13	0.20
L1	1.10	–	–
[illegible]	[illegible]	[illegible]	[illegible]
L2	1.17	1.27	1.37
L4	0.21	0.26	0.34
L6	0.51	0.61	0.71
L7	0.51	0.61	0.71
P	1.15	1.30	1.45
θ	8°	10°	12°
Φ	1.10	1.20	1.30

Rev.01 202209

/ Marking Instructions

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

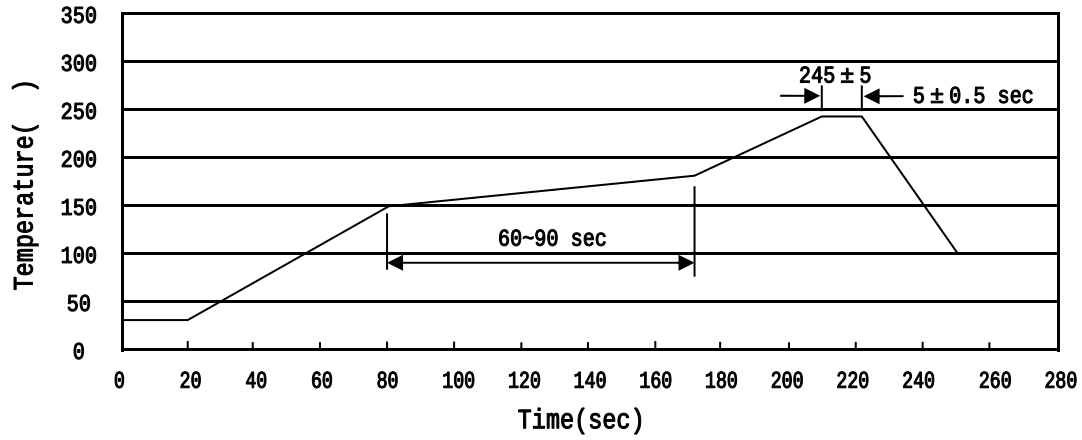

ڍ ˝ χ

1 Ĺ ♬ □ ẙ 150 Ḱ 180 ł ı `H ڑ 60 Ḱ 90sec;

2 Š Ө □ ẙ 245 ° 5 ł ı `H ڑ 'Y ﾊ ㎛ 5 ° 0.5sec;

3 ì ˙ ﾘ ˛ ɔ ﻉ ẙ ㎛ 2 Ḱ 10 ł /sec.

Note:

1.Preheating:150~180 ł , Time:60~90sec.

2.Peak Temp.:245 ° 5 ł , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ł /sec.

/ Resistance to Soldering Heat Test Conditions

□ ẙ χ 260 ° 5 ł `H ڑ χ 10 ° 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

ɔ` ɣ Ł / REEL

Package Type Ṃ Ł ė Ǻ	Units					Dimension		(unit mm³)
	Units/Reel ᴱ 2 ɔ`	Reels/Inner Box ɔ` 2 ¨	Units/Inner Box ᴱ 2 ¨	Inner Boxes/Outer Box ¨ 2 ヶ	Units/Outer Box ᴱ 2 ヶ	Reel	Inner Box ¨	Outer Box ヶ
PDFN5×6	5,000	2	10,000	6	60,000	13''×12	360×360×50	380×335×366

/ Notices