/ Descriptions

TO-252 N MOS


/ Features


±

≤ Ω Ω

≤ Ω Ω

/ Applications



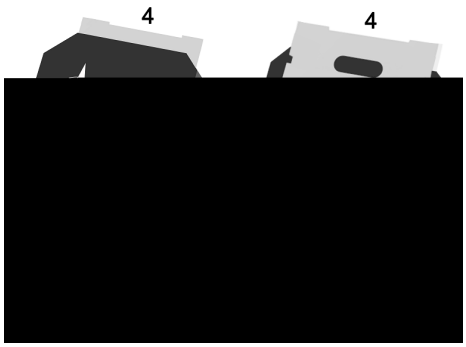


/ Marking


		I_D(Tc=25)		
		I_D(Tc=100)		
	≤			


/ Electrical Characteristics(Tc=25)

		Ω Ω				


/ Electrical Characteristic Curve

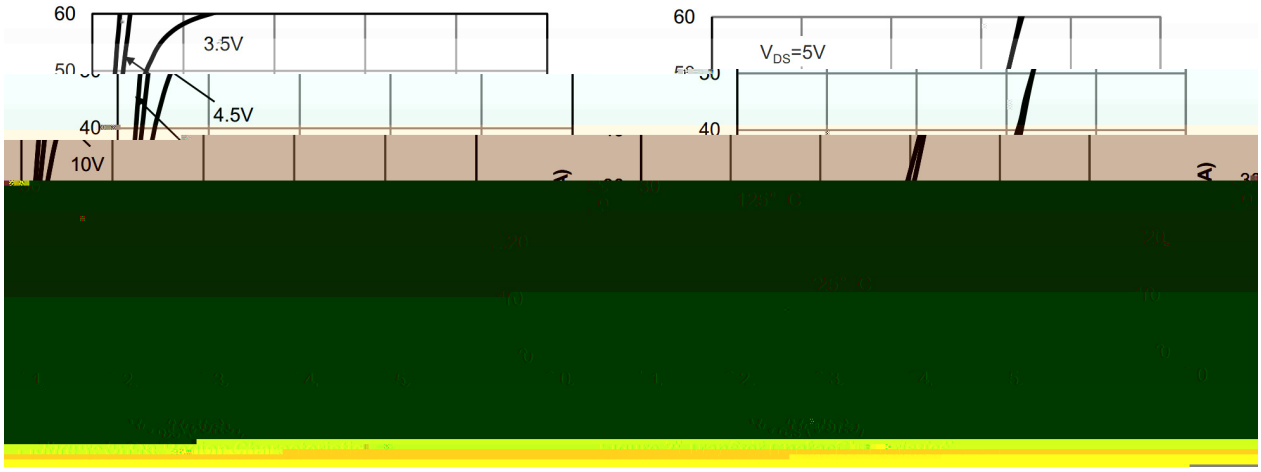

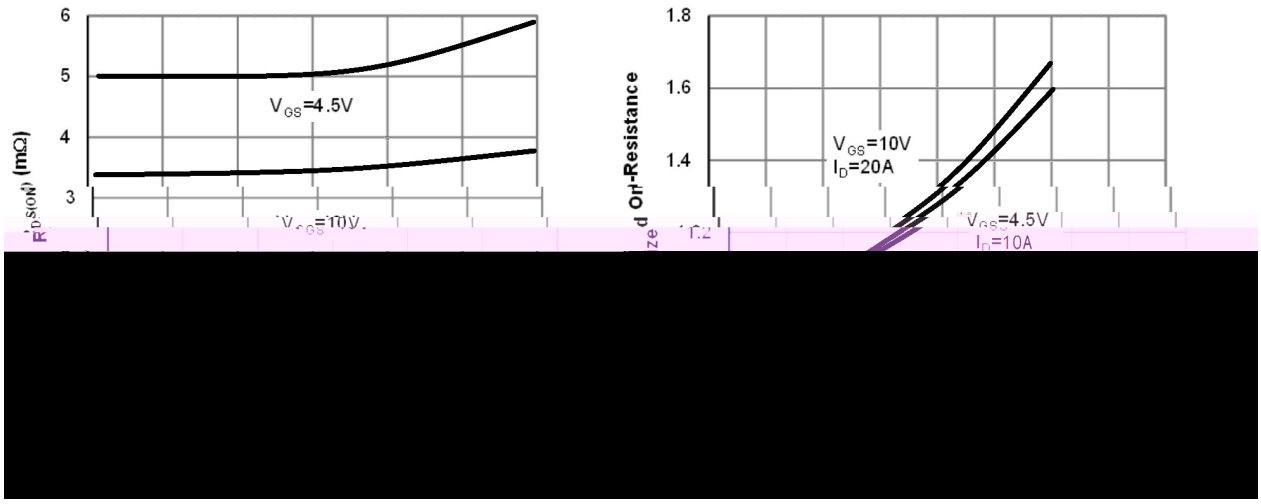

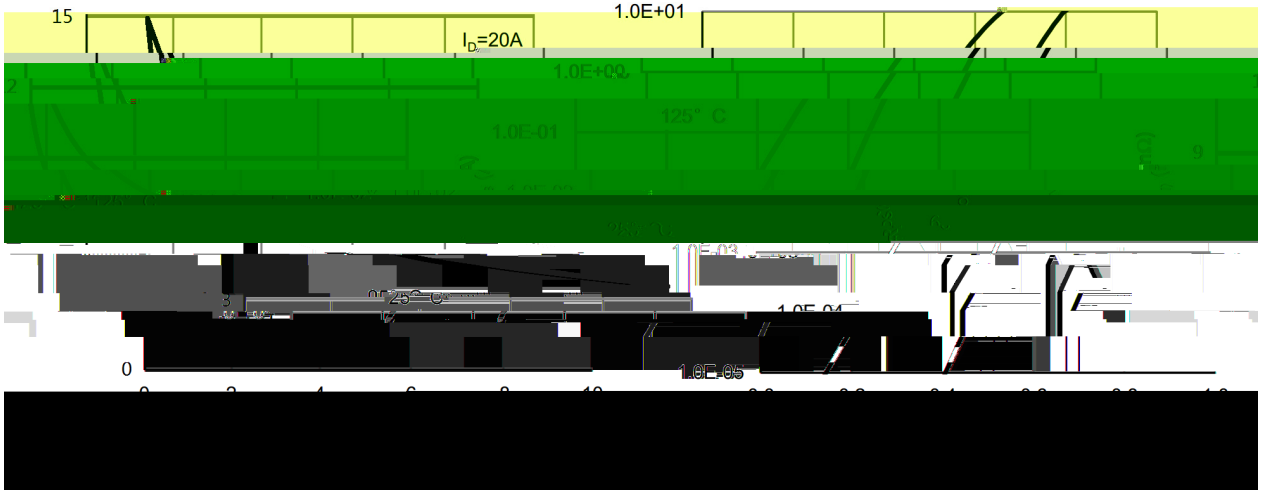

/ Electrical Characteristic Curve

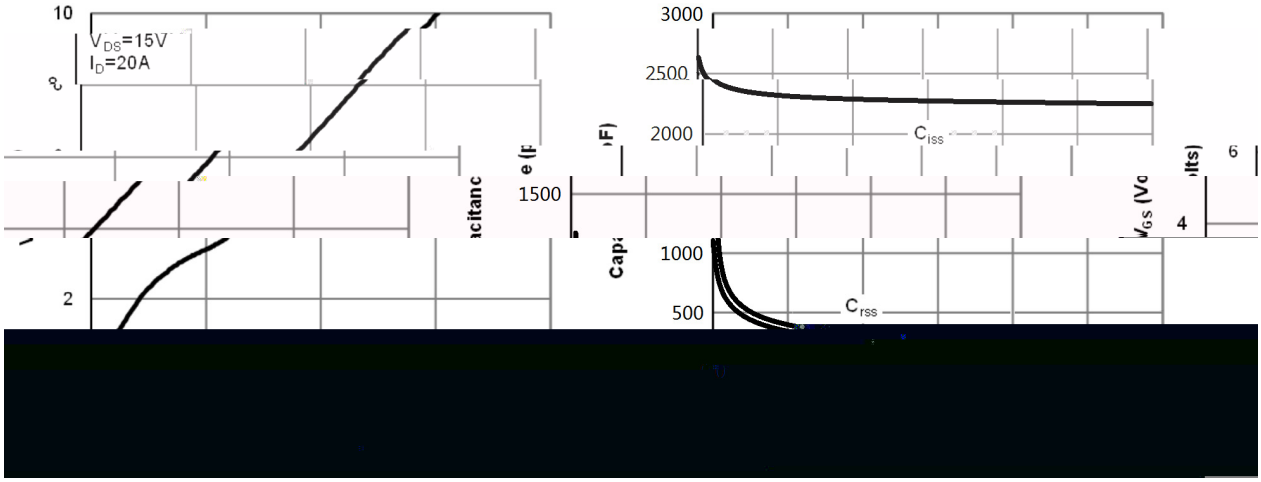



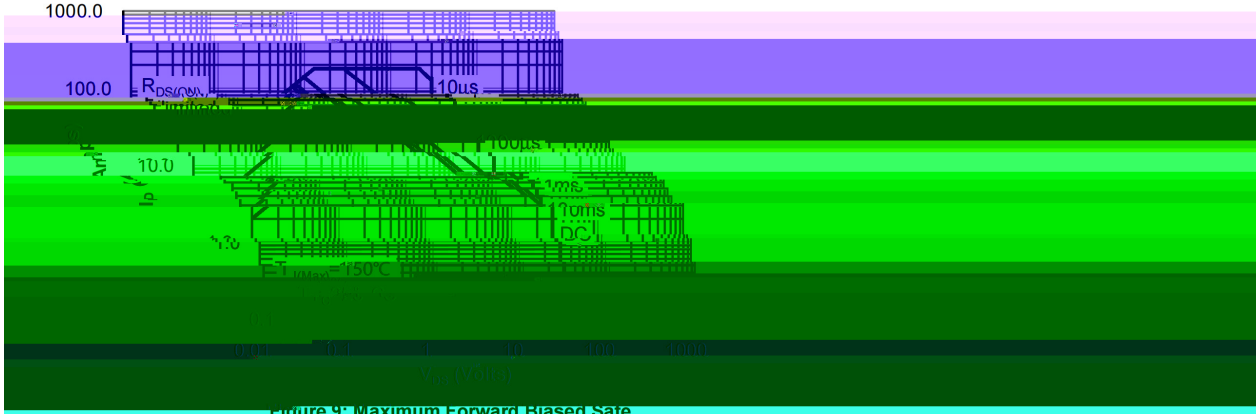


Figure 9: Maximum Forward Biased Safe Operating Area

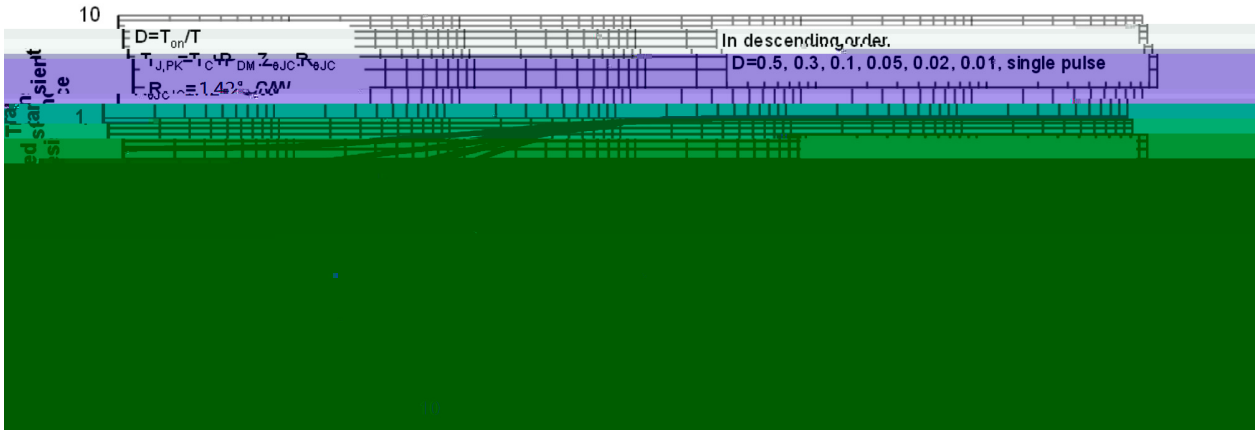

BRCS035N03DP


/ Marking Instructions

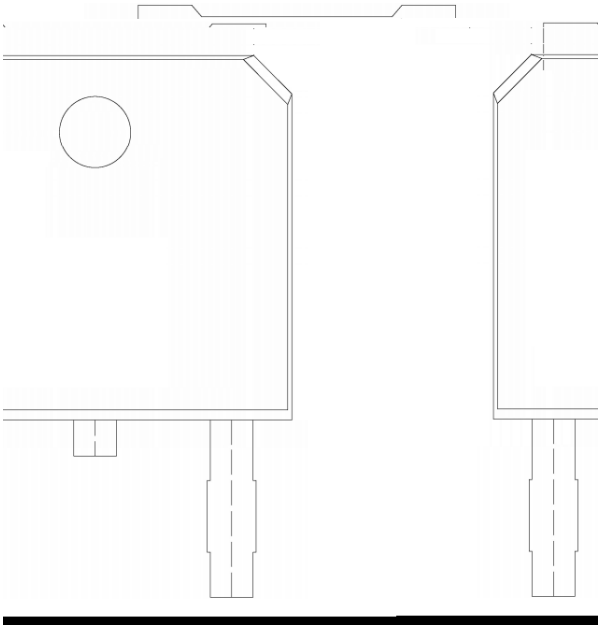

035N03

****

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

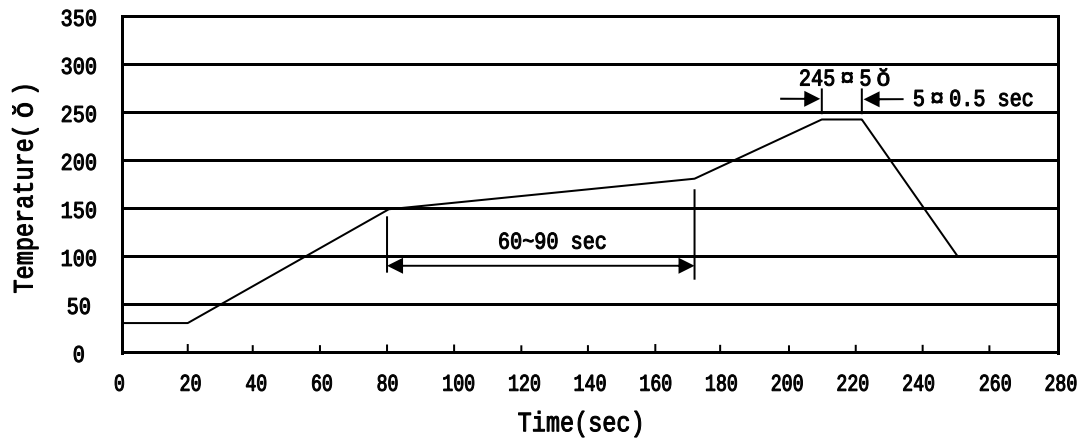

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices