BRCS045N10SHRA

Rev.A Feb.-2023

蓝箭电子 BLUE ROCKET ELECTRONICS

DATA SHEET

"Yـ / Descriptions

TO-220 N

N-CHANNEL MOSFET in a TO-220 Plastic Package.

◕ È / Features

,


Ultra Low On-Resistance,fast switching.

٧ ِ / Applications


BMS

High frequency switching and synchronous rectification, BMS, Motor.

ภ ً ً ≠ ع / Equivalent Circuit



ã ﻨ ٗ / Pinning

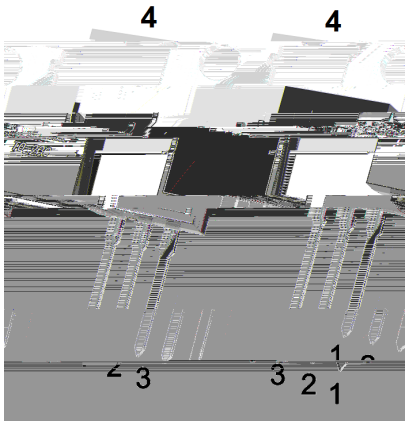

PIN1 G PIN 2 4 D PIN 3 S\

ﻠ ʜ ـَ / Marking

See Marking Instructions.

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	100	V
Drain Current		I_D(Tc=25)	150	A
Pulsed Drain Current		I_{DM}	319	A
Gate-Source Voltage		V_{GS}	± 20	V
Single Pulsed Avalanche Energy(L=0.5mH)		E_{AS}	381	mJ
Avalanche Current		I_{AS}	33	A
Total Power Dissipation		P_D(Tc=25)	180	W
Junction and Storage Temperature Range		T_J,T_{STG}	-55 to 150	
Thermal Resistance-Junction to Ambient	t ≤ 10s	$R_{\theta JA}$	17	/W
	Steady-State		62.5	
Thermal Resistance-Junction to Case	Steady-State	$R_{\theta JC}$	0.69	

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V	I_D=250μA	100	109		V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=100V	V_{GS}=0V			1	μA
Gate-Body Leakage Current Forward	I_{GSS}	V_{GS}=±20V	V_{DS}=0V			±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS}	I_D=250μA	2	2.6	4	V
Static Drain-Source On-Resistance	$R_{DS(on)1}$	V_{GS}=10V	I_D=20A		3.2	4.5	mΩ
	$R_{DS(on)2}$	V_{GS}=6V	I_D=10A		4.2	6.5	mΩ
Forward On Voltage	V_{SD}	V_{GS}=0V	I_S=1A			1.2	V
Gate resistance	R_g	f=1MHz			1.3		Ω

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$			27		
Turn-On Rise Time	t_r	V_{GS}=10V V_{DS}=50V R_L=2.5Ω R_{GEN}=3Ω		20		ns
Turn-Off Delay Time	$t_{d(of}$					

⁄ ∃ ̃Ą´E ℳ ƒ / Electrical Characteristic Curve

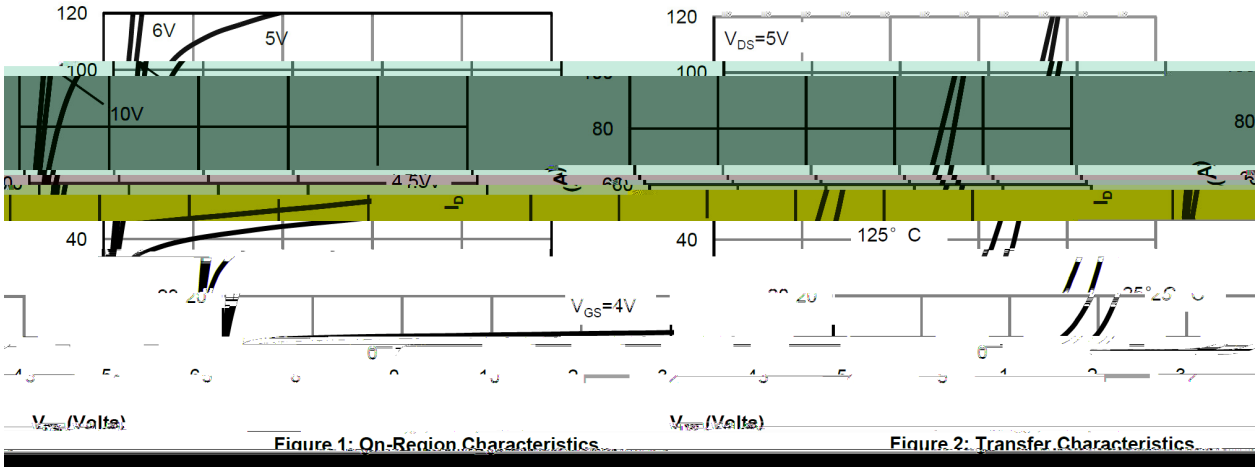
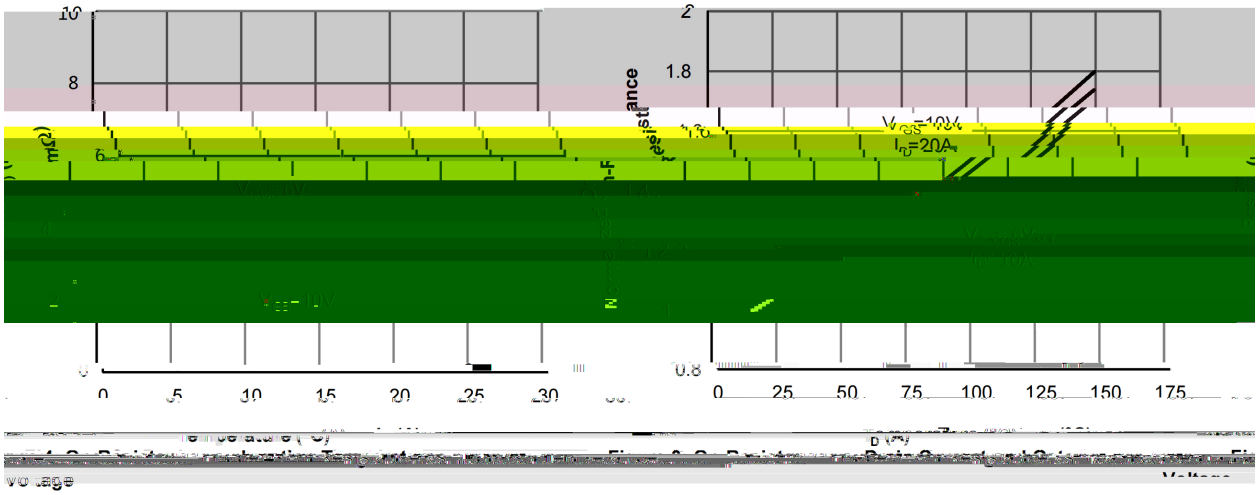


Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics




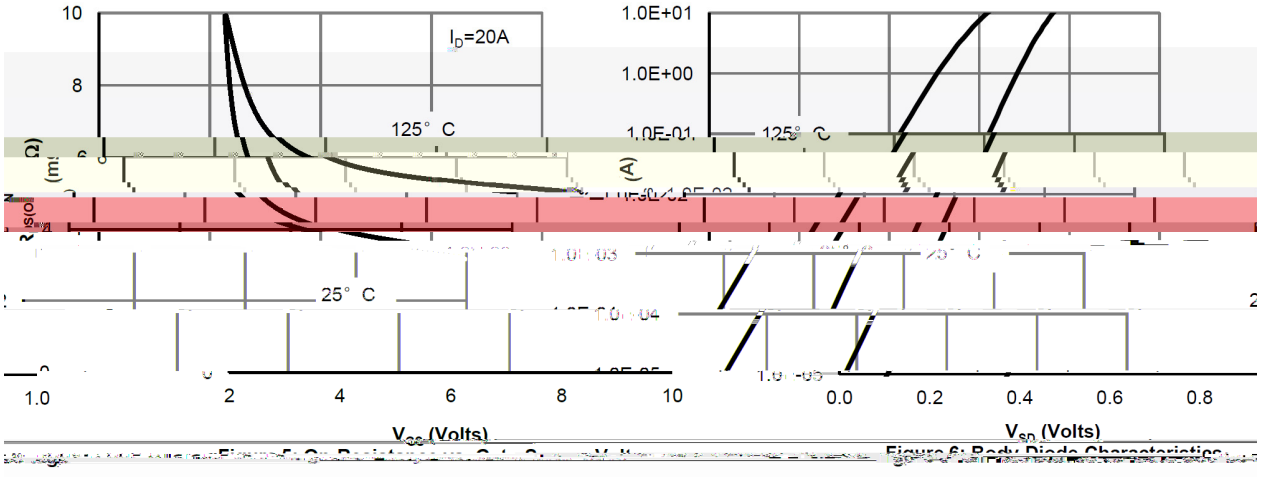


Figure 6: Body Diode Characteristics

ᵘ Ė Ò Ļ ʃ

ł. Ł Ω / Marking Instructions

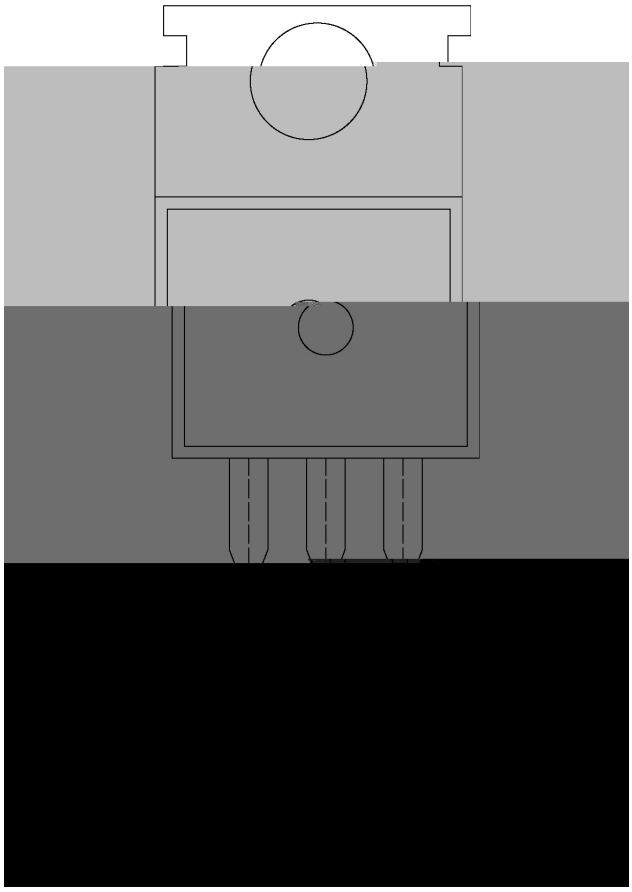

ØMPP-P-Ł WPÑ ÑÑÉMP-ŻWP