/ Descriptions

TO-263 N

N-CHANNEL MOSFET in a TO-263 Plastic Package.

/ Features

,


Ultra Low On-Resistance,fast switching,HF Product.

/ Applications


PFC

These devices are well suited for high efficient switched mode power supplies Active power factor correction, electronic lamp ballast based on half bridge topology.

/ Equivalent Circuit



/ Pinning

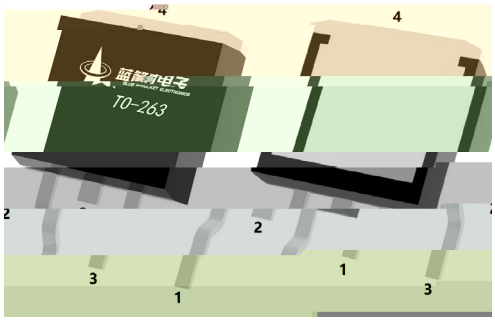

PIN1 G PIN 2 4 D PIN 3 S

/ Marking

See Marking Instructions.


Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	40	V
Drain Current		I_D(Tc=25)	196	A
Pulsed Drain Current		I_{DM}	500	A
Gate-Source Voltage		V_{GS}	±20	V
Single Pulsed Avalanche Energy(L=0.5mH)		E_{AS}	561.8	mJ
Avalanche Current		I_{AS}	26.5	A
Total Power Dissipation		P_D(Tc=25)	347	W
Junction and Storage Temperature Range		T_J,T_{STG}	-55 to 150	
Thermal Resistance-Junction to Ambient	t ≤ 10s	$R_{\theta JA}$	15	/W
	Steady-State		60	
Thermal Resistance-Junction to Case	Steady-State	$R_{\theta JC}$	0.36	

Parameter

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Total Gate Charge	Q_g(10V)	V_{GS}=10V V_{DS}=20V I_D=20A		70		nC
Total Gate Charge	Q_g(4.5V)			15		
Gate Source Charge	Q_{gs}			15		
Gate Drain Charge	Q_{gd}			22		
Turn-On Delay Time	$t_{d(on)}$	V_{GS}=10V V_{DS}=20V R_L=1Ω R_{GEN}=3Ω		15		ns
TuTime t	r			30		
Tuf Delay Time t	d(off)			54		
Tuf Fall Time	t f			20		

3


/ Electrical Characteristic Curve

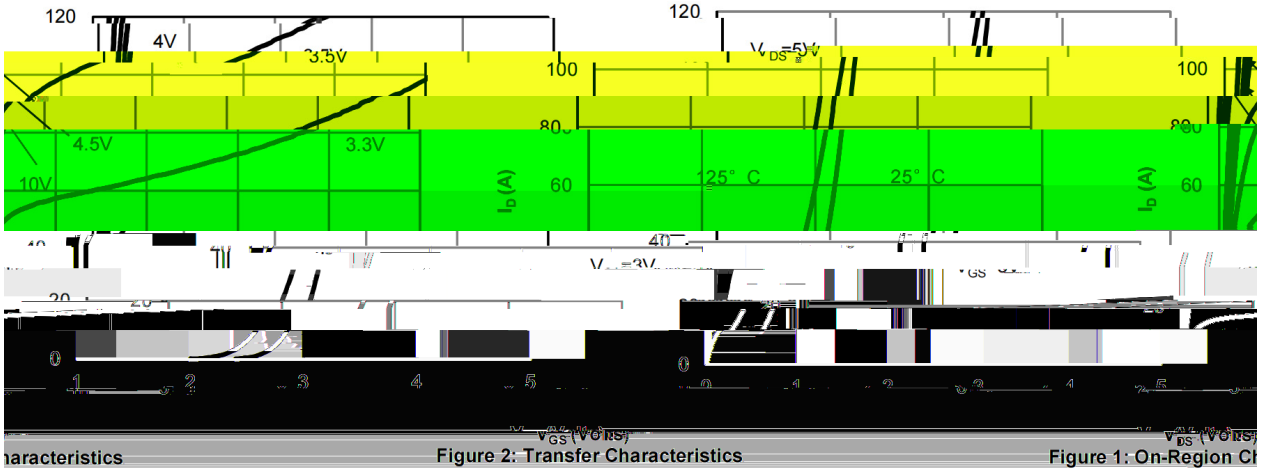


aracteristics


Figure 2: Transfer Characteristics


Figure 1: On-Region Ch

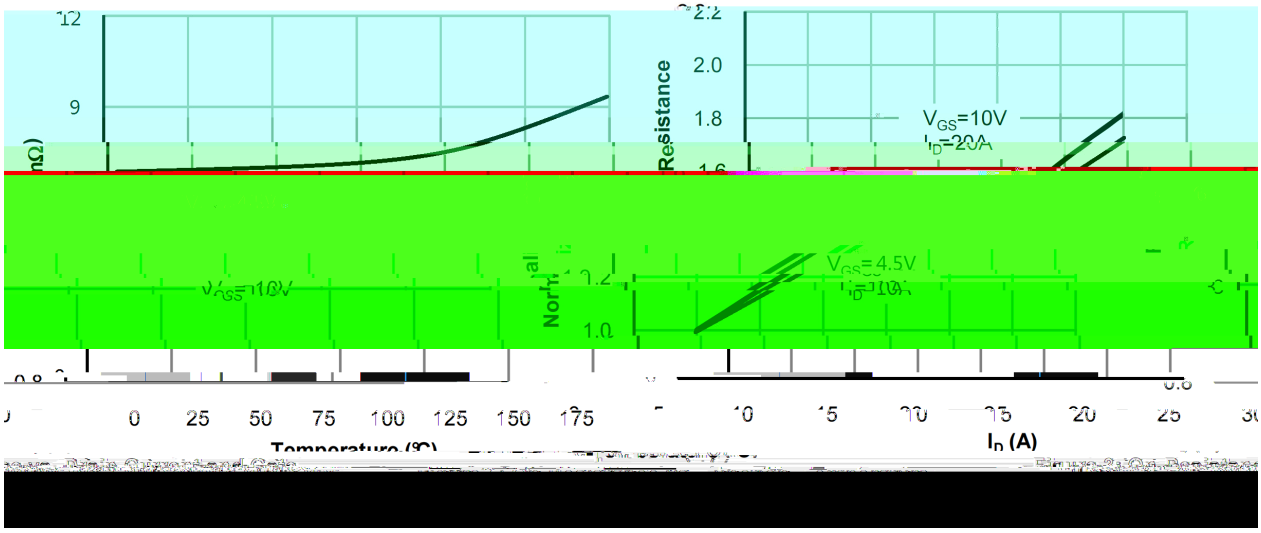


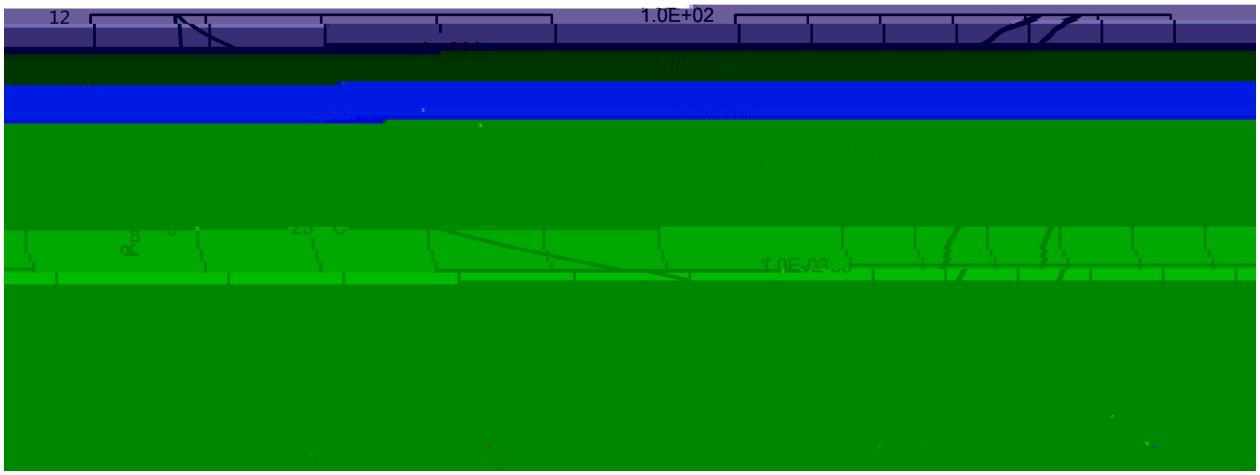


/ Electrical Characteristic Curve

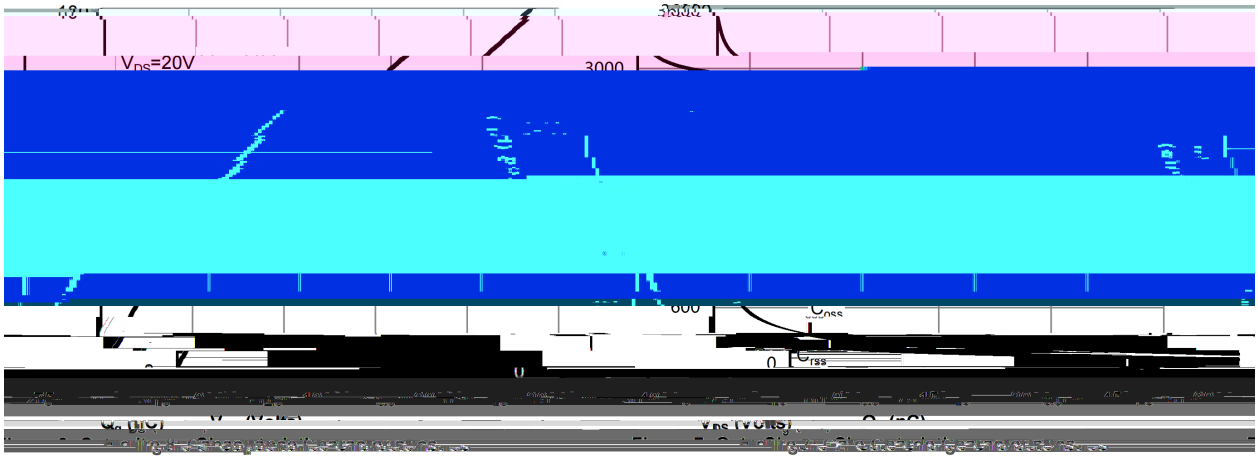

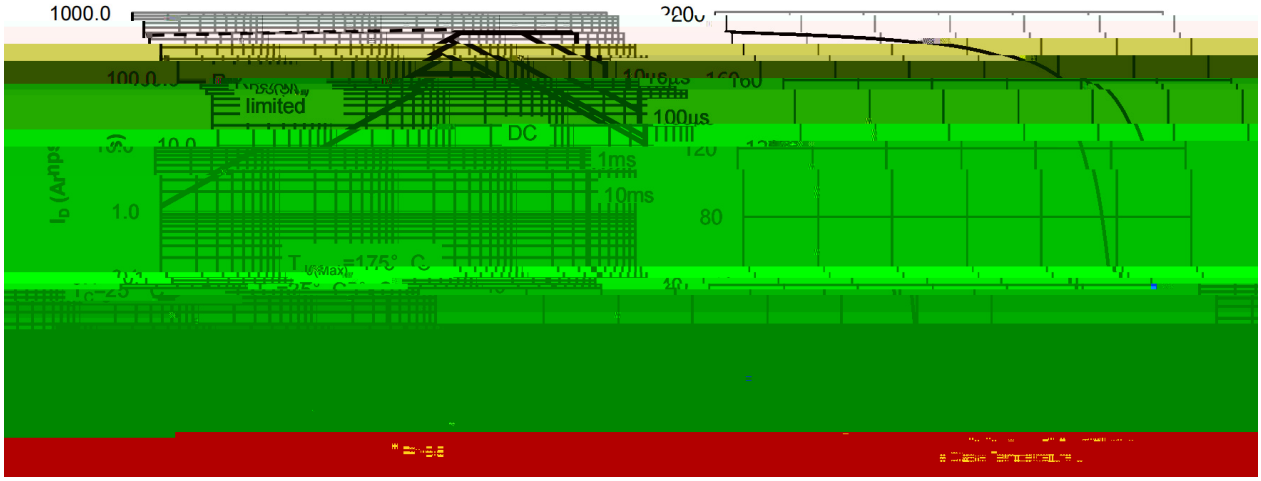

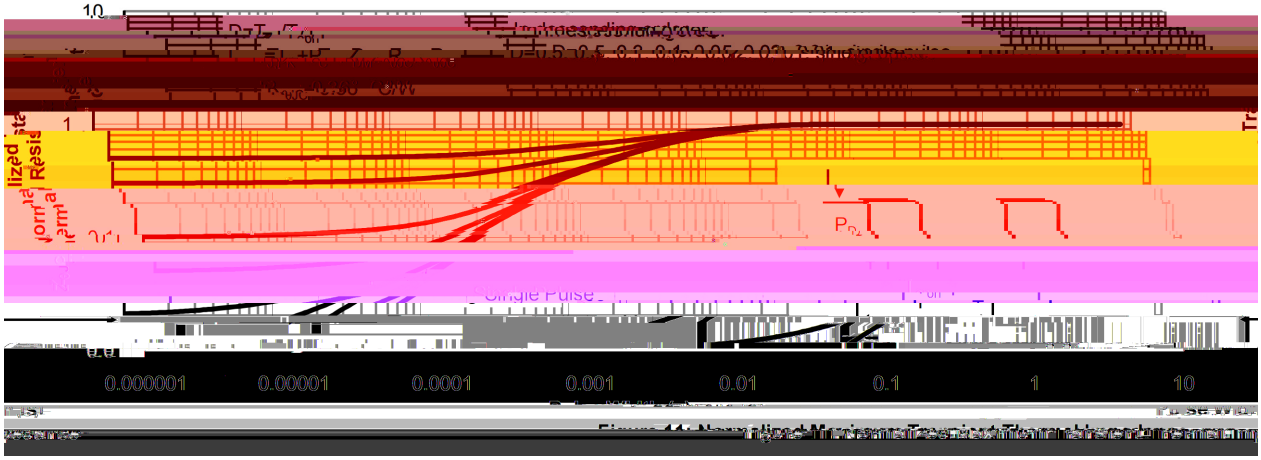

/ Marking Instructions

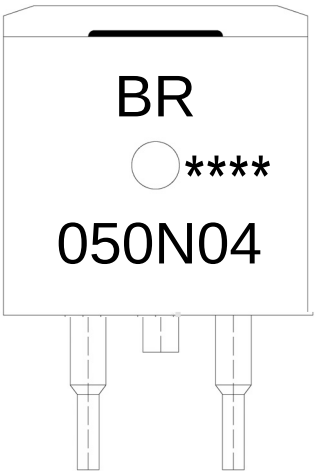

BR

050N04

****

Note:

BR:	Company Code
050N04:	Product Type
****:	Lot No. Code, code change with Lot No