



≤ Ω Ω

≤ Ω Ω

BMS



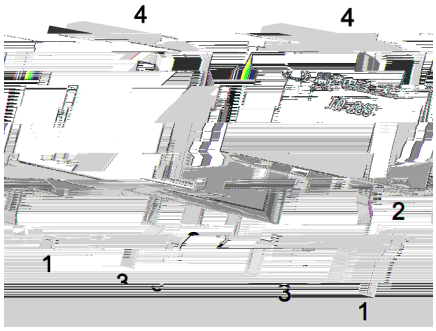

		±	

Ω Ω

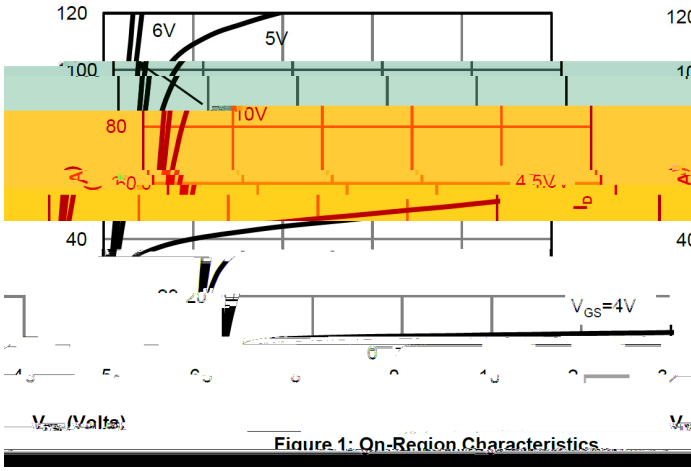


Figure 1: On-Region Characteristics

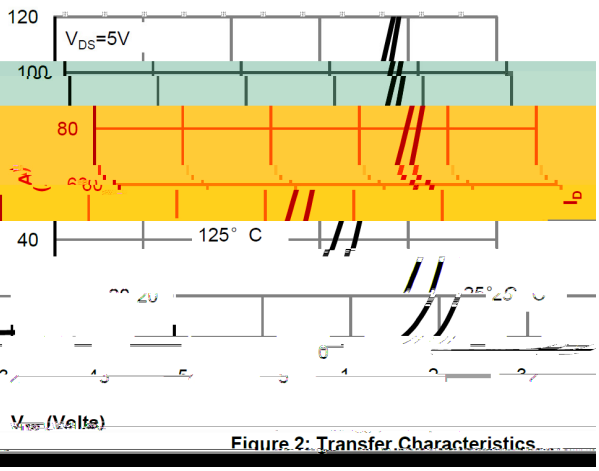
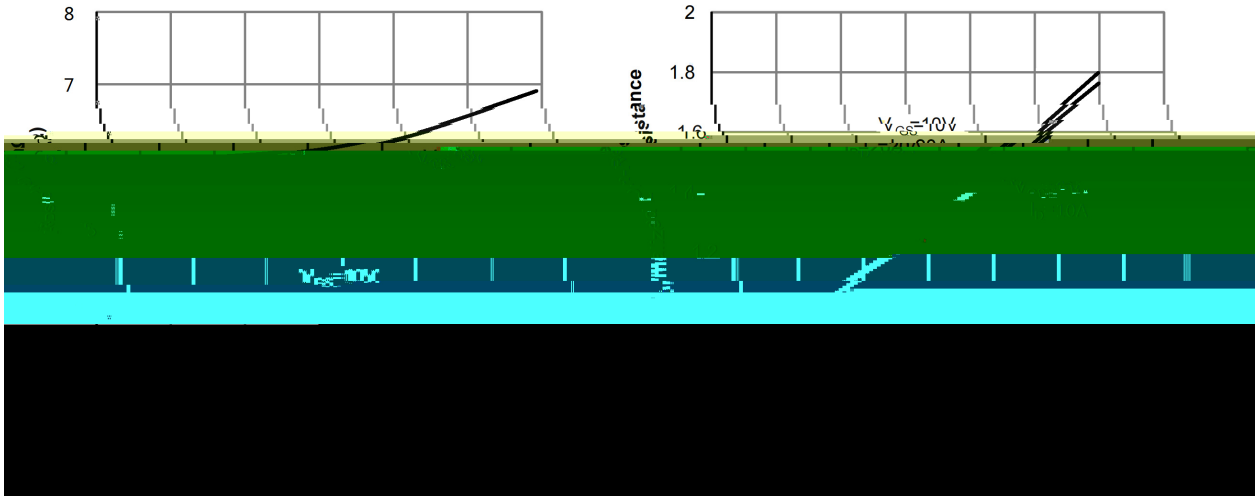
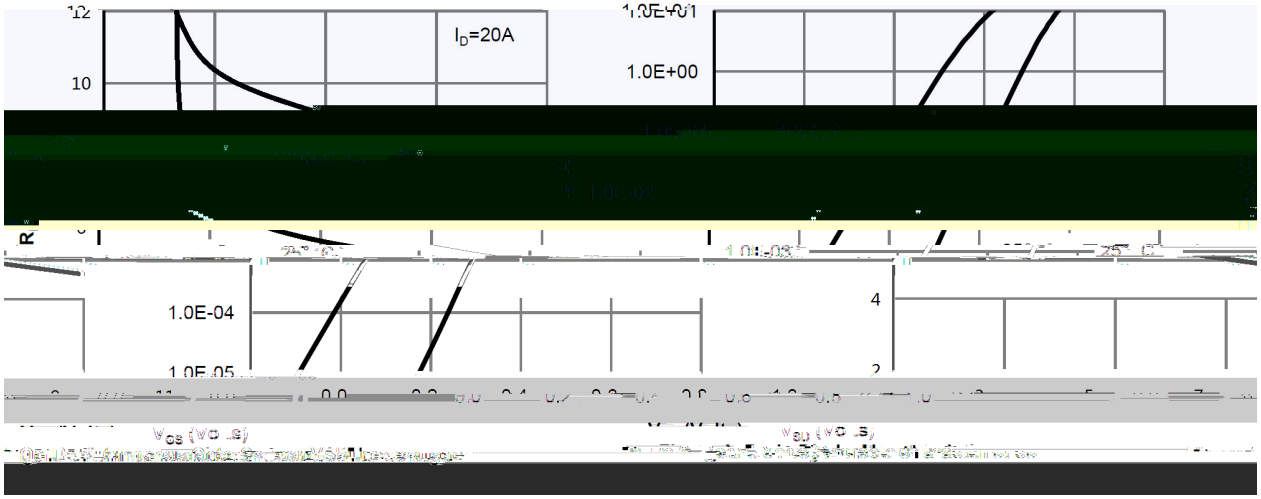
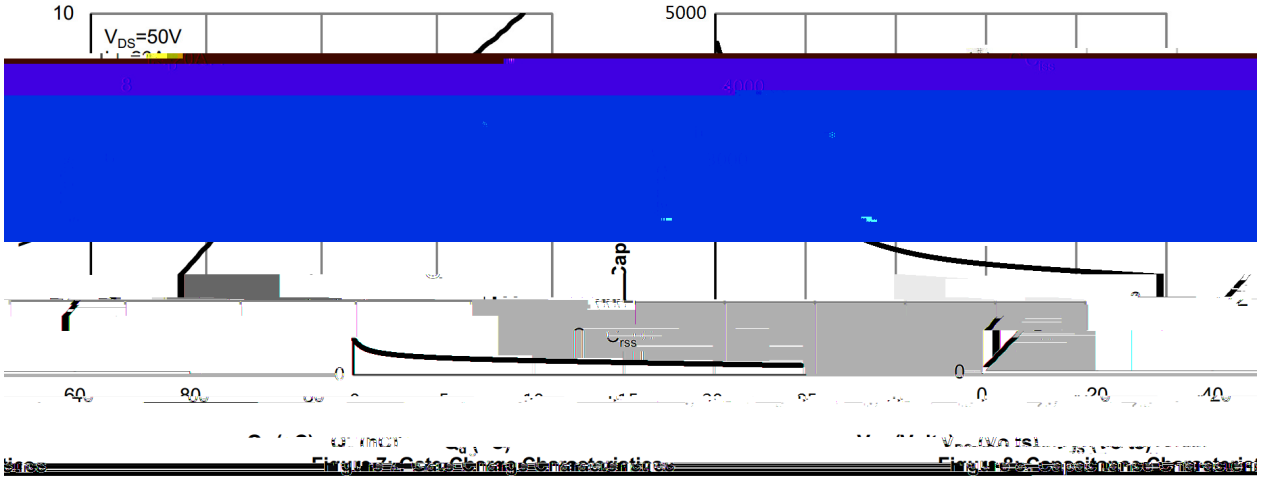


Figure 2: Transfer Characteristics









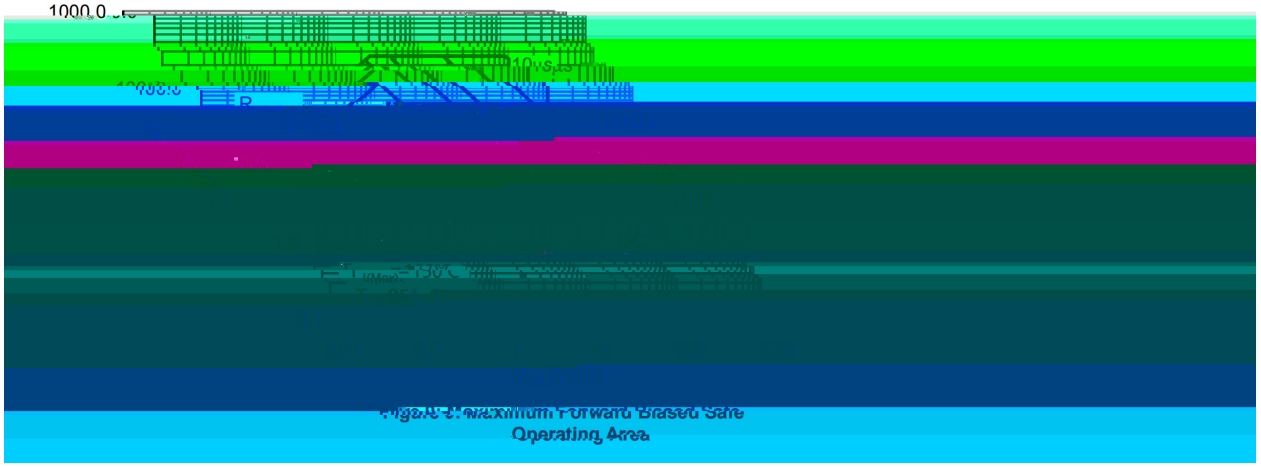


Figure 11: Maximum Forward Biased Safe Operating Area

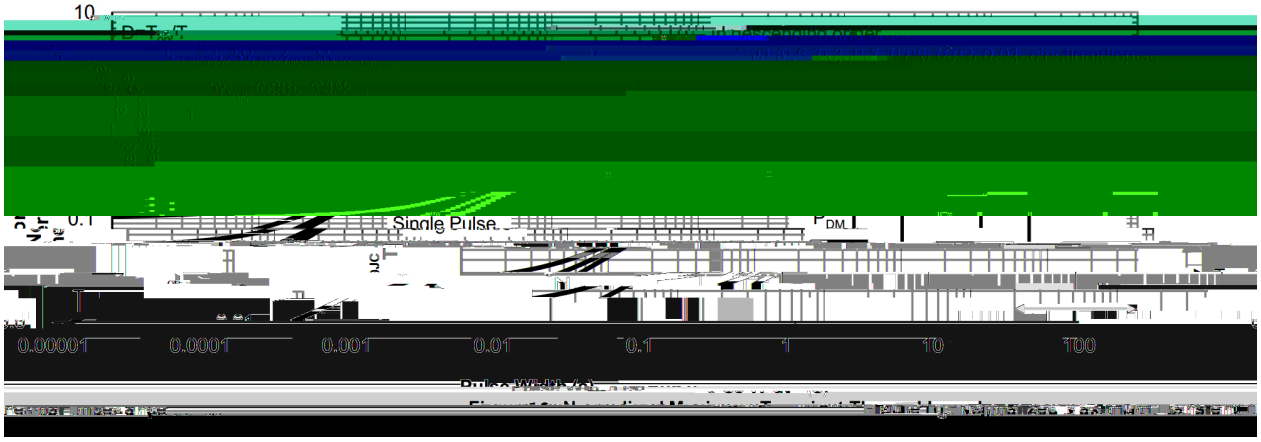

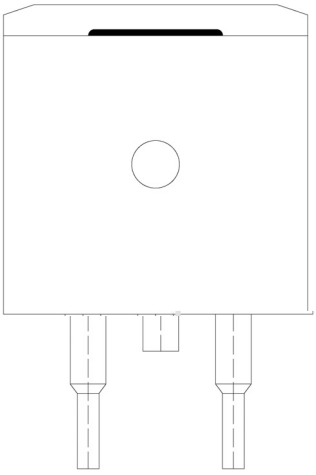


BR

055N10SH

****

Temperature Profile for IR Reflow Soldering(Pb-Free)

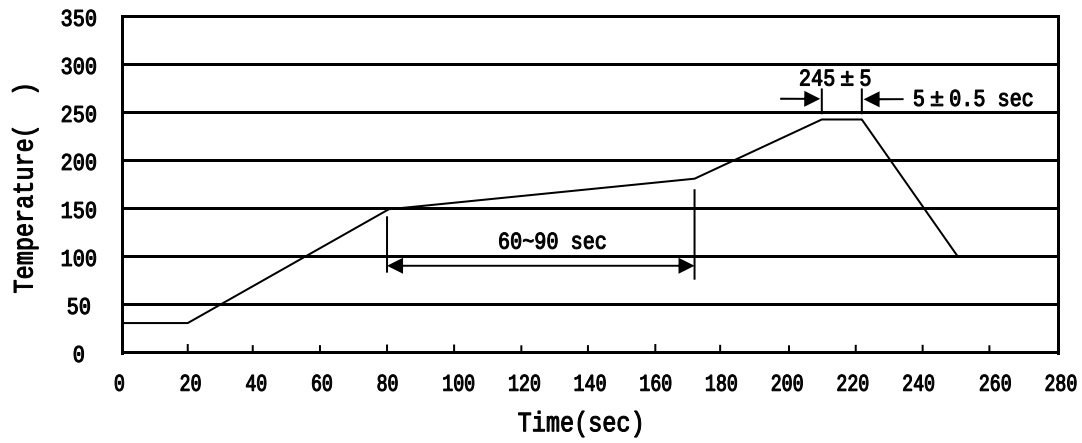

± ± ± ±

± ±

								Ж
	ن ـ	ـ	ن		ن			

								Ж
	ن		ن		ن			