/ Descriptions

ṂṂ Ⱡ ʓ ʃ ᷒ Ƶ ˥

/ Features

≤ Ω Ω


≤ Ω Ω

ɲ ꜰ β


/ Applications

Ĵ ʰ ʈ ᏀᎩ ᷍ ɤ ᷒ ɔ ◊ ₩ ę ı ƺ ʊ Ã SIF ɔ ت ⊐ ᷍ Æ ⁷ ö ɛ ᒧ ▁ ɔ Ḍ ` ĵ ♂

/ Equivalent Circuit



/ Pinning

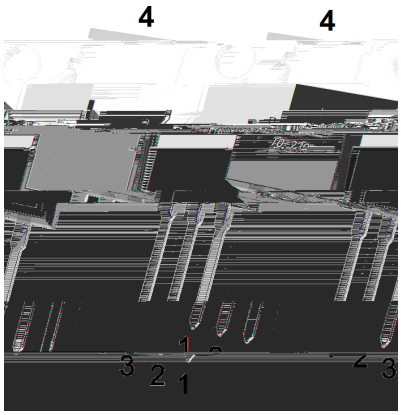

X X X


/ Marking


ð ᴍ ˥ ب ˝


			±	
	≤	θ		
		θ		

		μ				
μ						
					±	
		μ				
Ω						

/ Electrical Characteristic Curve

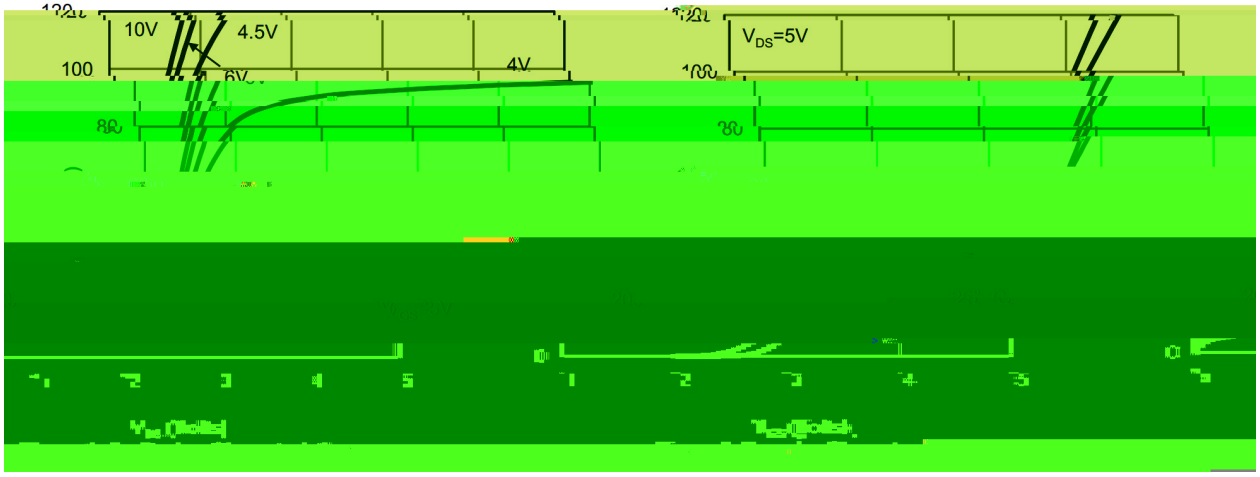


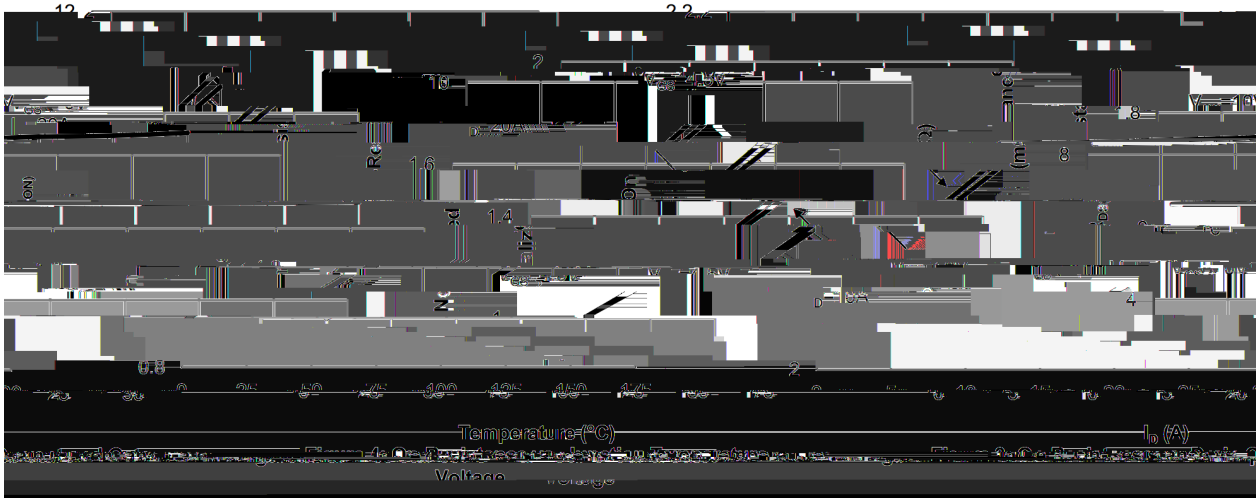

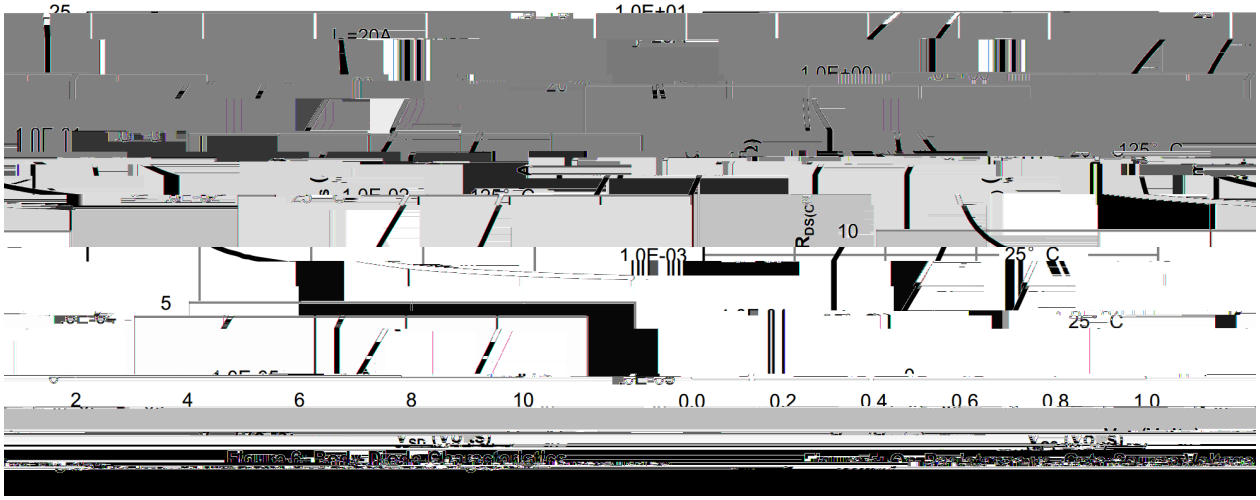

BRCS080N10SRA

/ Marking Instructions

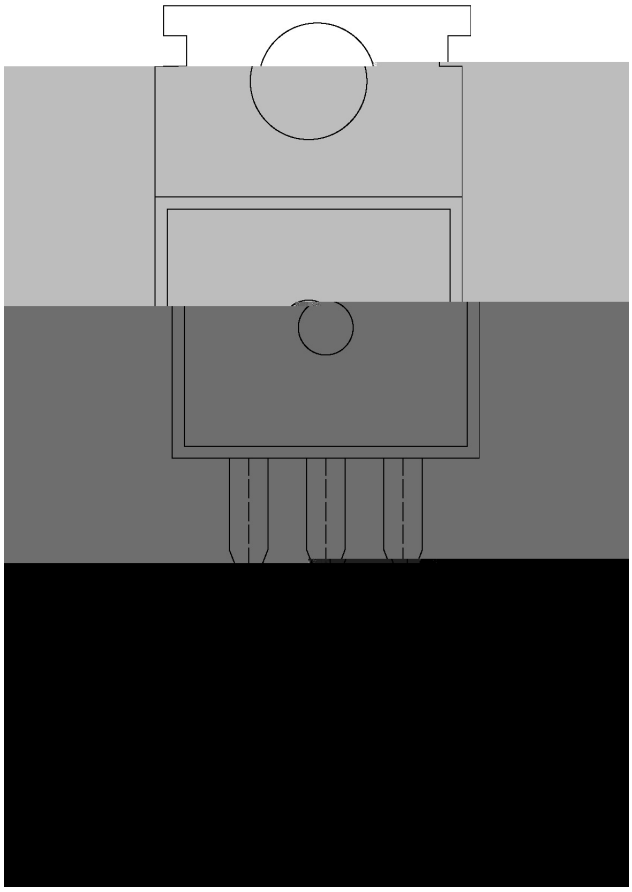

ِ ّ χ

EU χ ѭ ϗ и Ґϧ

3 ; 3Q43V χ ѭ ϳ ᴺ Ґϧ

---- χ ѭ ɨ ғ ӈ ᴺ Ґϧ ɪ ₹ ɨ ғ ӈ ᴺ Ψ ϙ

( ) / Temperature Profile for Dip Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Bag /	