/ Descriptions

PDFN3×3A-8L N MOS

N-Channel Enhancement Mode Field Effect Transistor in a PDFN3×3A-8L Plastic Package.

/ Features

V_{DS} (V) = 30V

I_D =20 A (V_{GS} = ±20V)


$R_{DS(ON)}$@10V ≤ 13mR(Typ.11mR)


HF Product.

/ Applications

DC/DC

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.



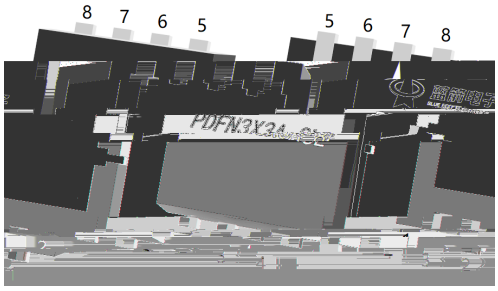

/ Marking


See Marking Instructions.


Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	30	V
Drain Current		I_D(Tc=25)	20	A
Drain Current - Pulsed		I_{DM}	55	A
Gate-Source Voltage		V_{GSS}	±20	V
Single Pulsed Avalanche Energy		E_{AS}	199	mJ
Avalanche Current		I_{AS}	12.9	A
Power Dissipation		P_D(Tc=25)	15.5	W
Operating and Storage Temperature Range		T_J,T_{stg}	-55 to 150	
Junction-to-Ambient	t ≤ 10	R JA	30	
Junction-to-Ambient	Steady-t		I	/W


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=250 A	30			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=30V V_{GS}=0V			1	A
Gate-Body Leakage Current Forward	I_{GSS}	V_{GS}=±20V V_{DS}=0V			±0.1	A
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS} I_D=250 A	1.0	1.8	3.0	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	V_{GS}=10V I_D=20A		11	13	m
		V_{GS}=4.5V I_D=10A		16	20	m
Drain-Source Diode Forward Voltage	V_{SD}	V_{GS}=0V I_S=1A			1.2	V
Input Capacitance	C_{iss}	V_{DS}=25V V_{GS}=0V f=1.0MHz		666		pF
Output Capacitance	C_{oss}			26		
Reverse Transfer Capacitance	C_{rss}			63		
Gate resistance	R_g	V_{GS}=0V V_{DS}=0V f=1MHz		1.7		
Total Gate Charge	$Q_{g(10V)}$	V_{GS}=10V V_{DS}=15V I_D=8A		13.6		nC
Total Gate Charge	$Q_{g(4.5V)}$			6.8		
Gate Source Charge	Q_{gs}			1.6		
Gate Drain Charge	Q_{gd}			3.6		
Turn-On Delay Time	$t_{d(on)}$	V_{GS}=10V V_{DS}=15V R_L=1.87 R_{GEN}=4.5		5		ns
Turn-On Rise Time	t_r			3.5		
Turn-Off Delay Time	$t_{d(off)}$			22		
Turn-Off Fall Time	t_f			4.5		


/ Electrical Characteristic Curve

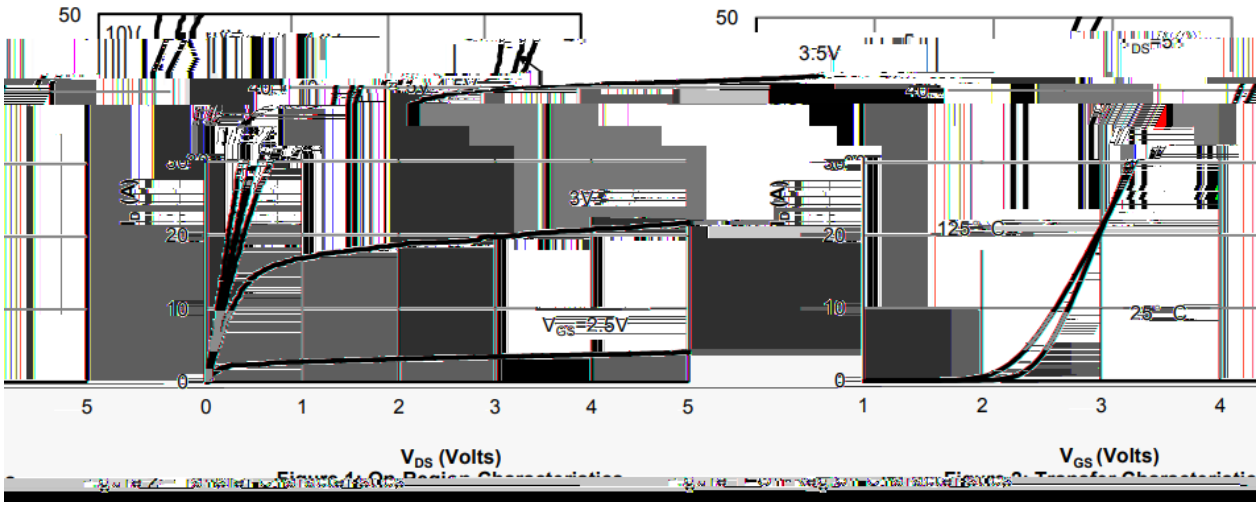


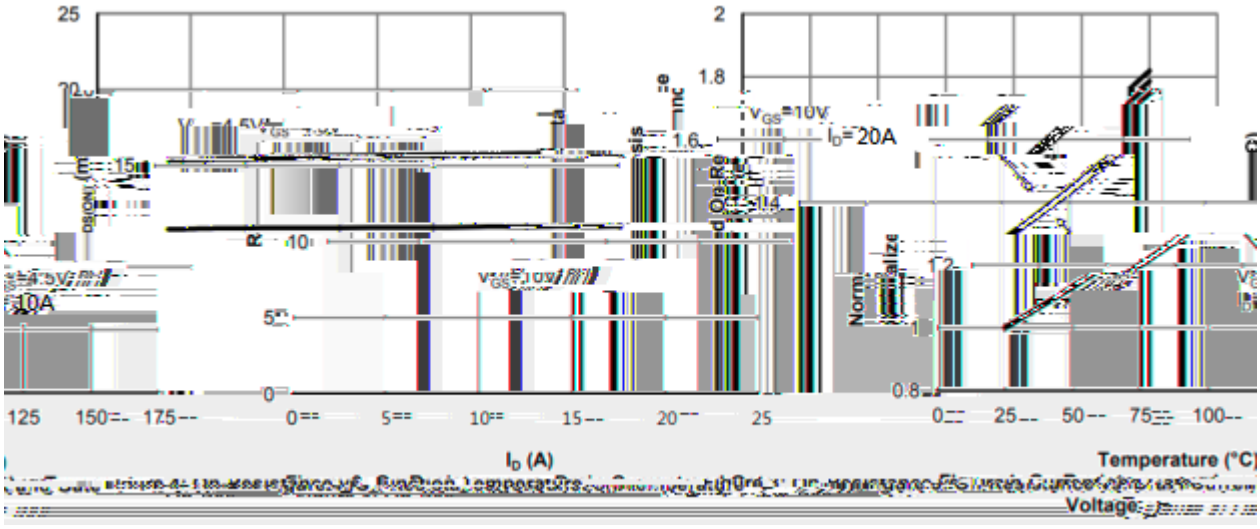


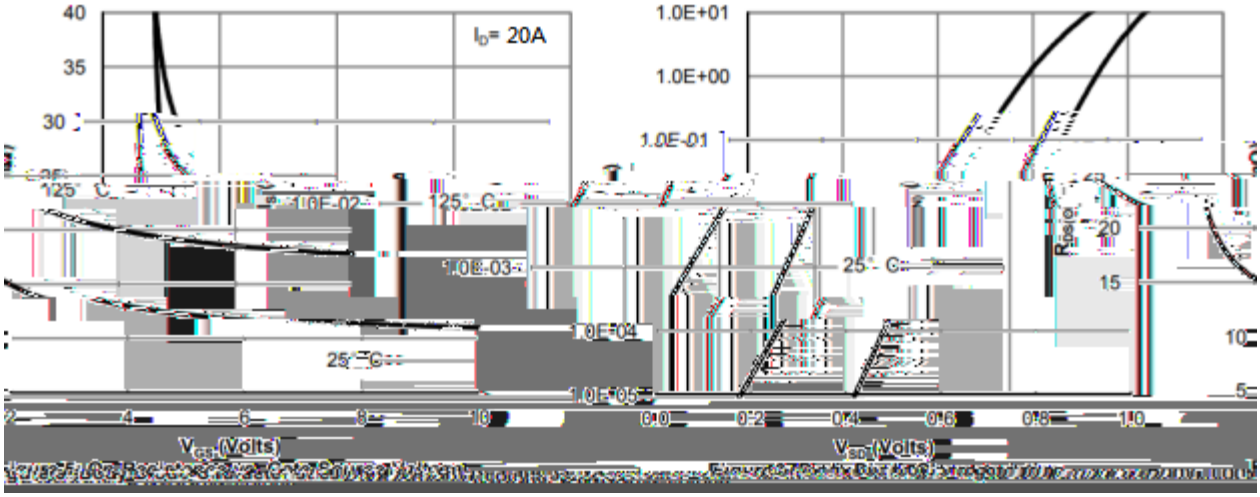

/ Electrical Characteristic Curve

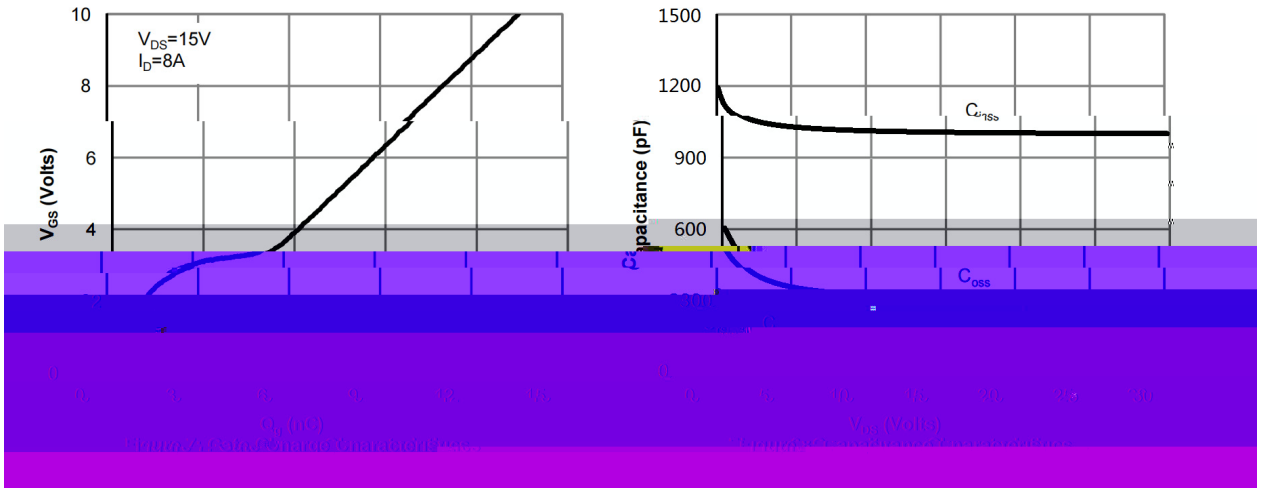

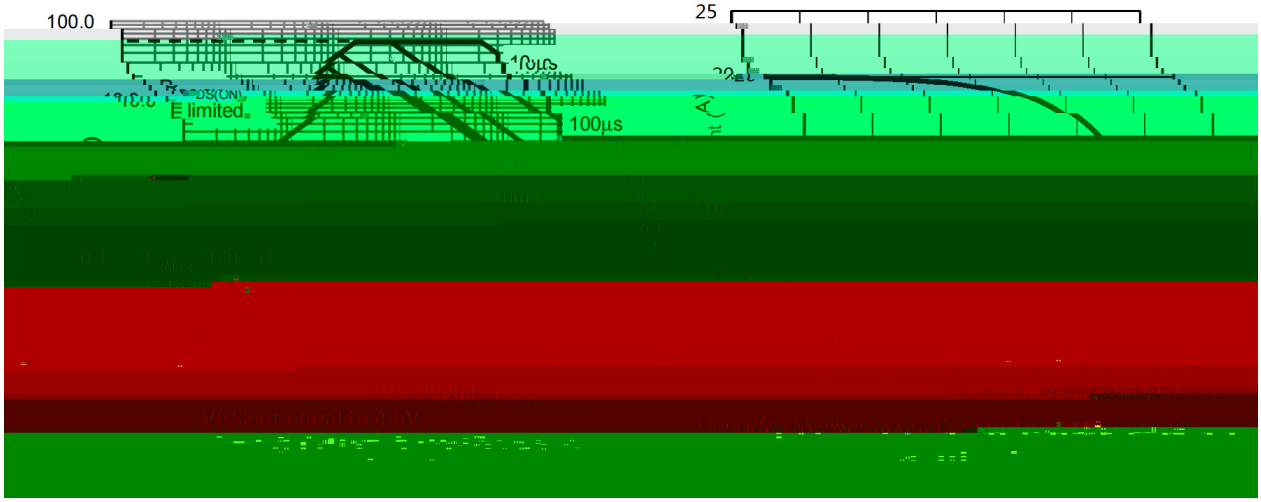


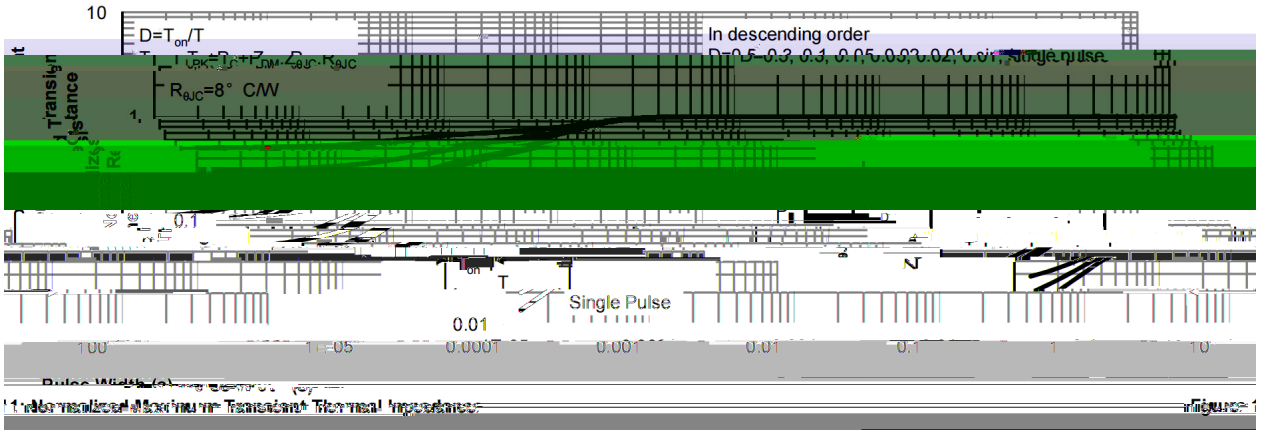

/ Package Dimensions

PDFN3X3A-8L

Unit:mm

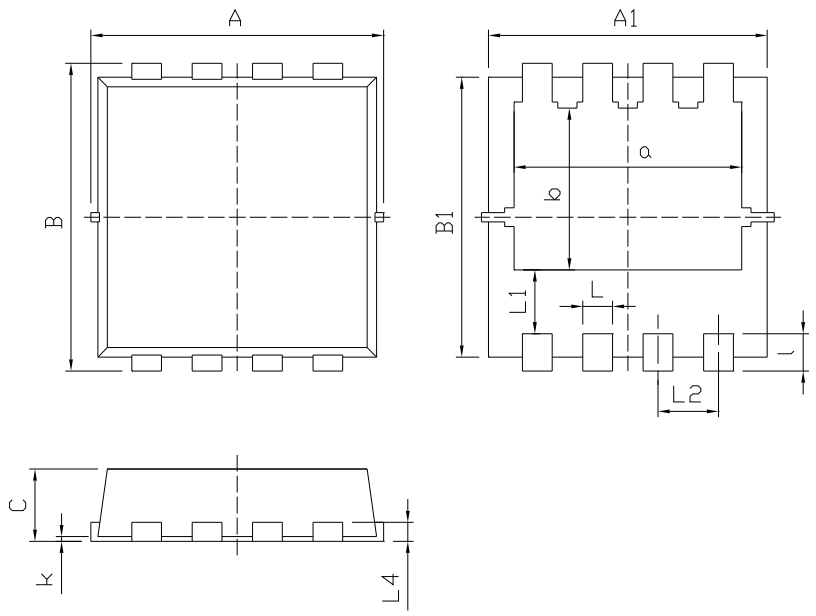

Dimensions In Millimeterer			
Symbol	MIN	TYP	MAX
A	3.20	3.30	3.40
A1	3.10	3.15	3.20
B	3.20	3.30	3.40
B1	2.95	3.00	3.05
C	0.75	0.80	0.85
L	0.25	0.30	0.35
L1	-	-	0.75
L2	0.55	0.65	0.75
L4	0.14	0.15	0.20
a	2.35	2.45	2.55
b	1.635	1.735	1.835
k	0.00	-	0.05
l	0.30	0.40	0.50

Rev.00 202011

/ Marking Instructions



BR

120N03

****

Note:

BR:	Company Code
120N03:	Product Type Code
****:	Lot No. Code, code change with Lot No

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

1 150 180 60 90sec;	1.Preheating:150~180 , Time:60~90sec.
2 245±5 5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3 2 10 /sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 7>û ˜ E	Units ;>û ¦H	Dimension ;>û p . (unit Æmm^3)
	-- -- - - - 1ç 1ç	-