

PDFN3×3-8L P MOS

Parameter	Symbol	Rating	Unit

/ Electrical Characteristic Curve

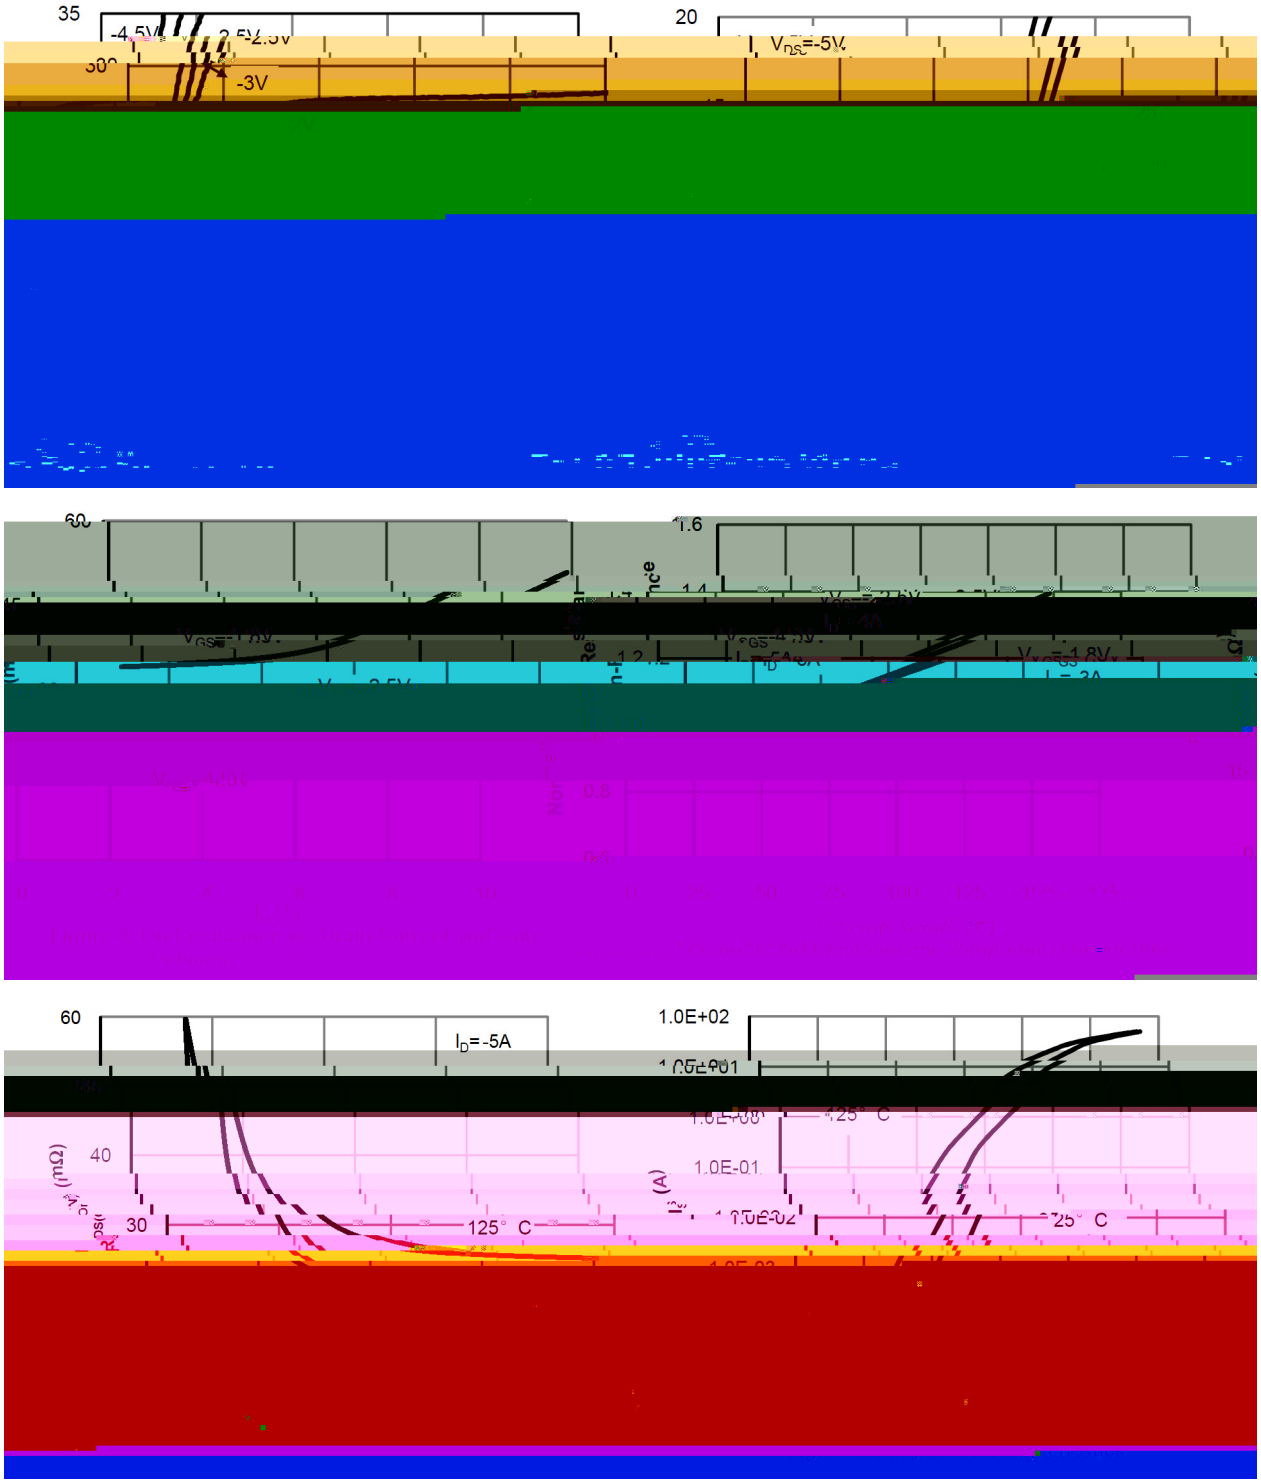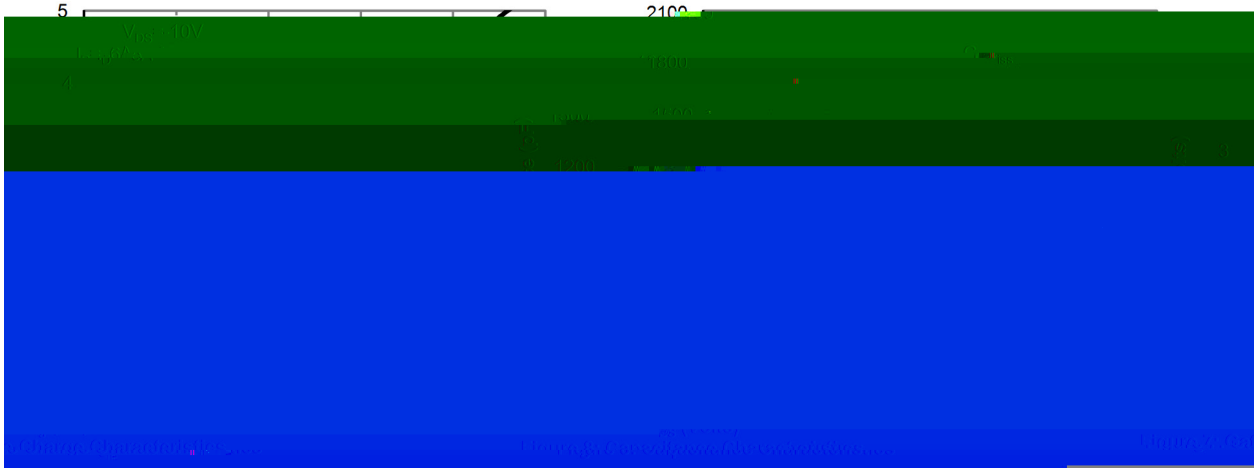

/ Electrical Characteristic Curve





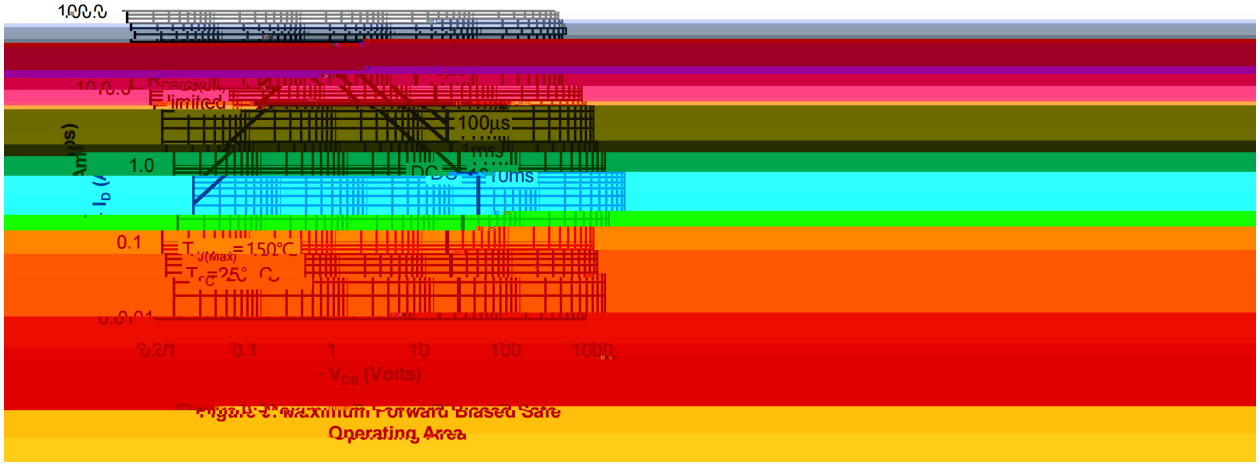


Figure 2: Maximum Forward Biased Safe Operating Area

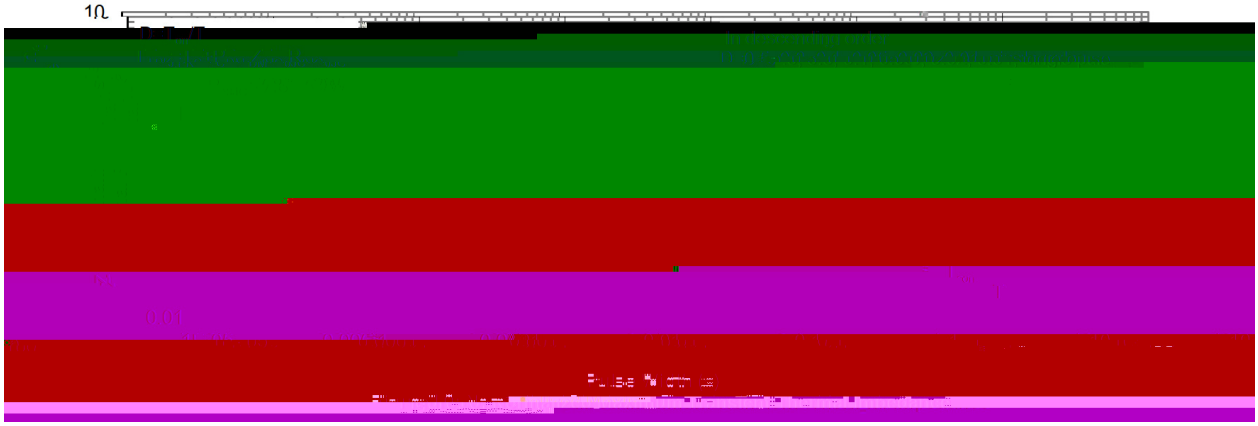

BRCS200P02YA

/ Marking Instructions

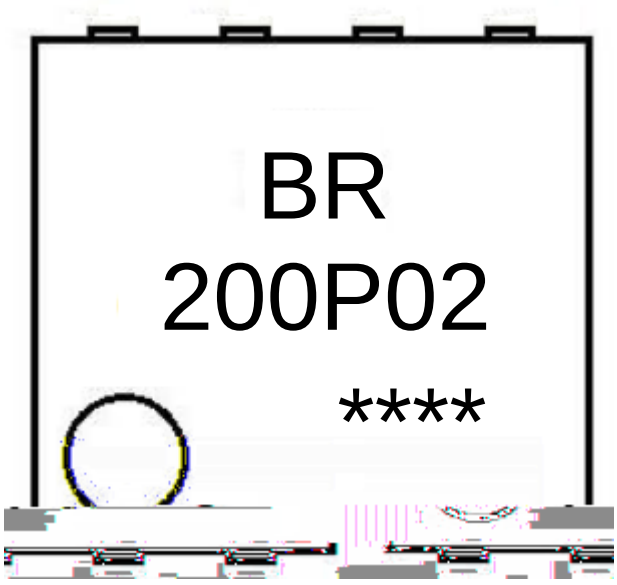

BR

200P02

****

Note:

BR:	Company Code
200P02:	Product Type Code
****:	Lot No. Code, code change with Lot No

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

1 150 180 60 90sec;

2 245±5 5±0.5sec;

3 2 10 /sec.

1.Preheating:150~180 , Time:60~90sec.

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units	Dimension	(unit mm³)