

	! " # $	% ! " & ' (	! ") * & + ,	- . / 0

TO-251 ? @@ A N B C MOS D E F G H N-CHANNEL MOSFET in a TO-251 astic Package.

I J K L M I N O K , M P Q R S T H
Low gate charge, low crss, fast switching.

U V I W K X Y Z [\ K X] ^ _ ` ^ _ a b] c d e f g & K h i E a b H
Suited for low voltage applications such as automotive,DC/DC Converters,and high efficiency switching for power management in protable and battery operated products.






PIN1 Z G


Parameter

Parameter Symbol


/ Electrical Characteristic Curve

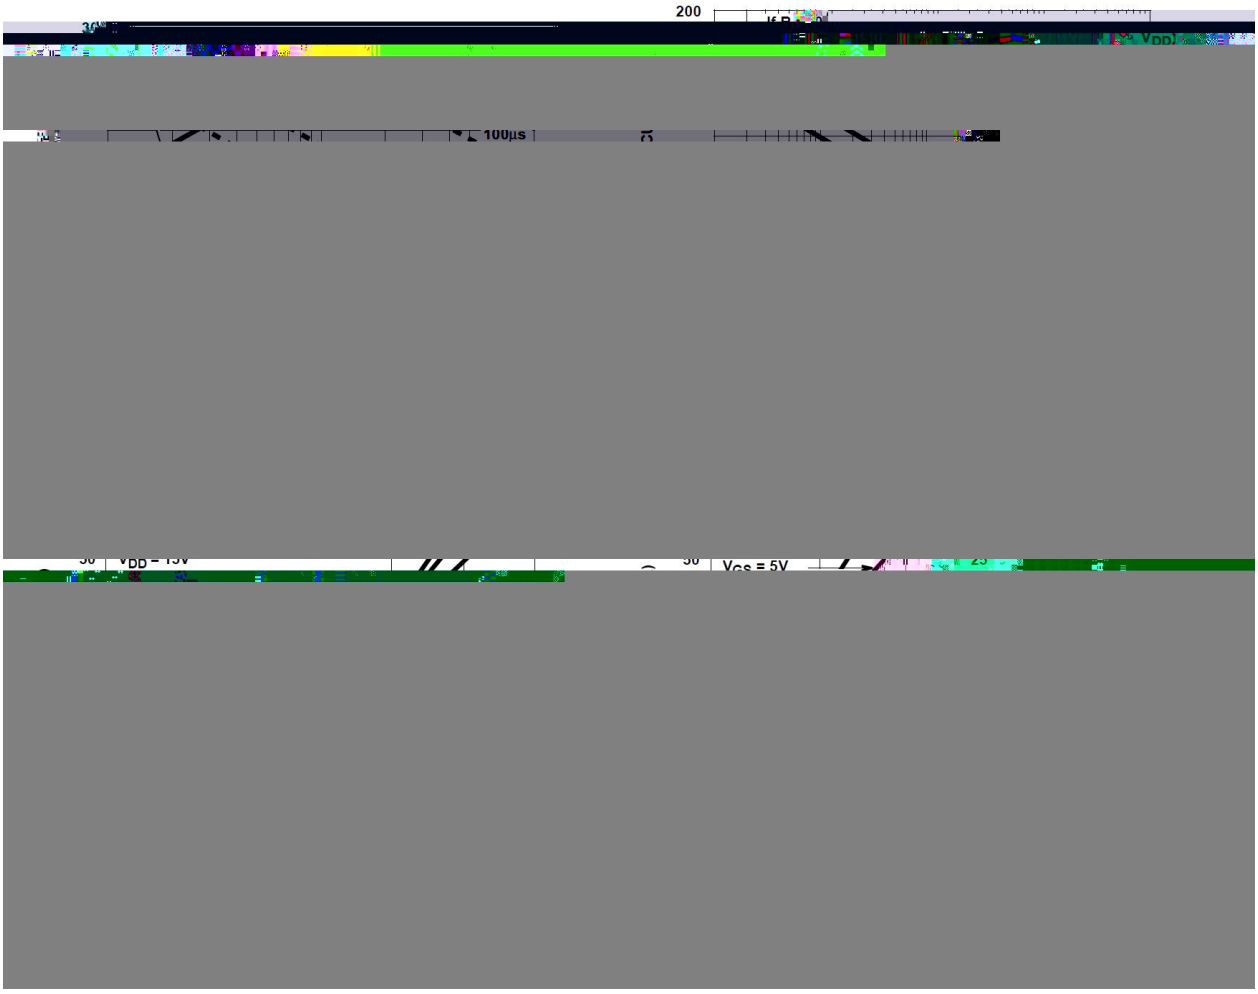


/ Electrical Characteristic Curve

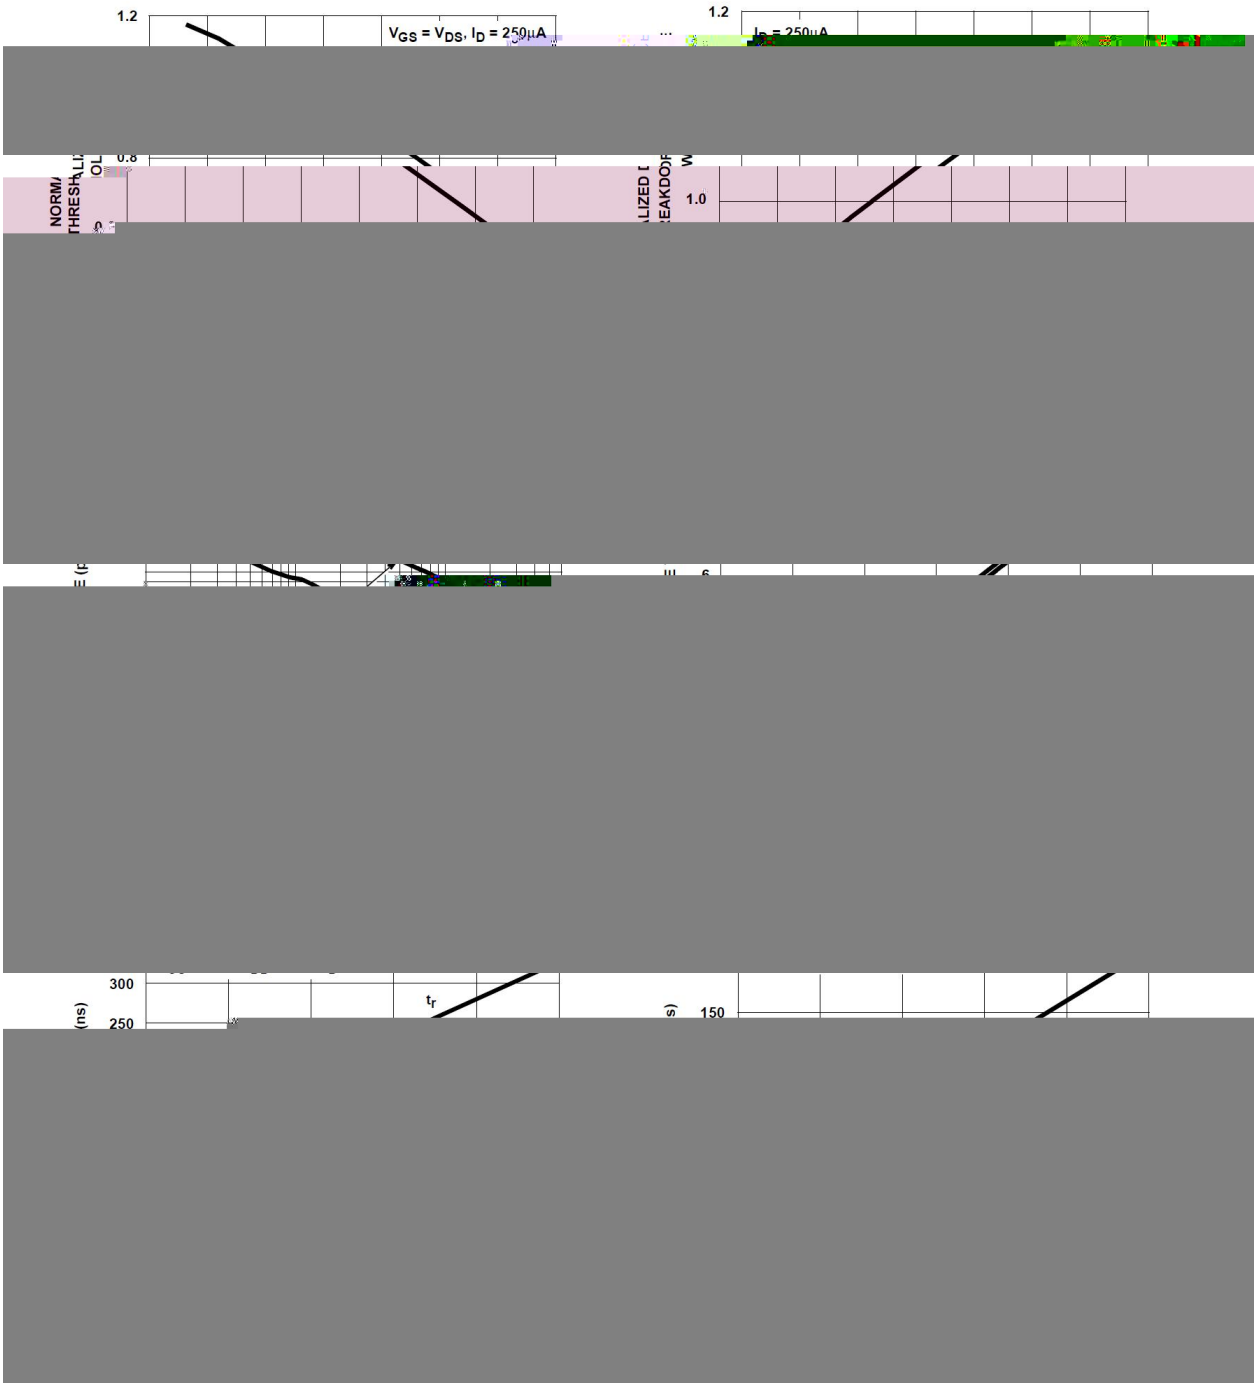

& Test circuits & Typical Application

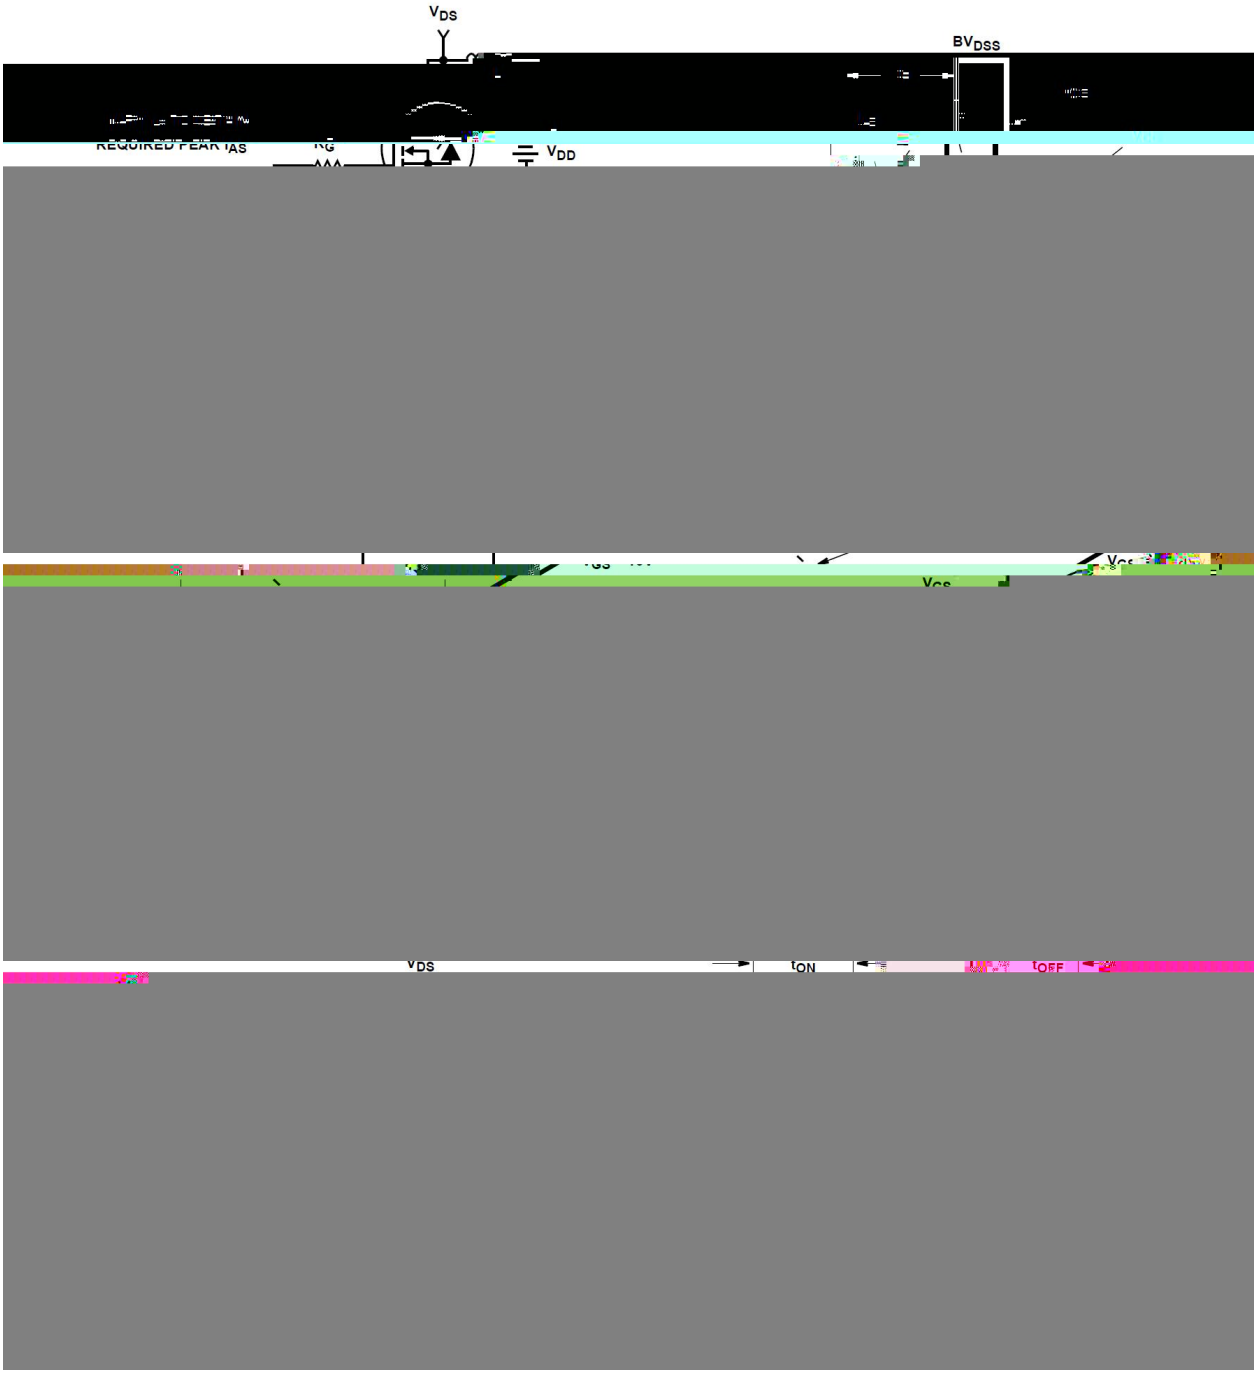


/ Package Dimensions

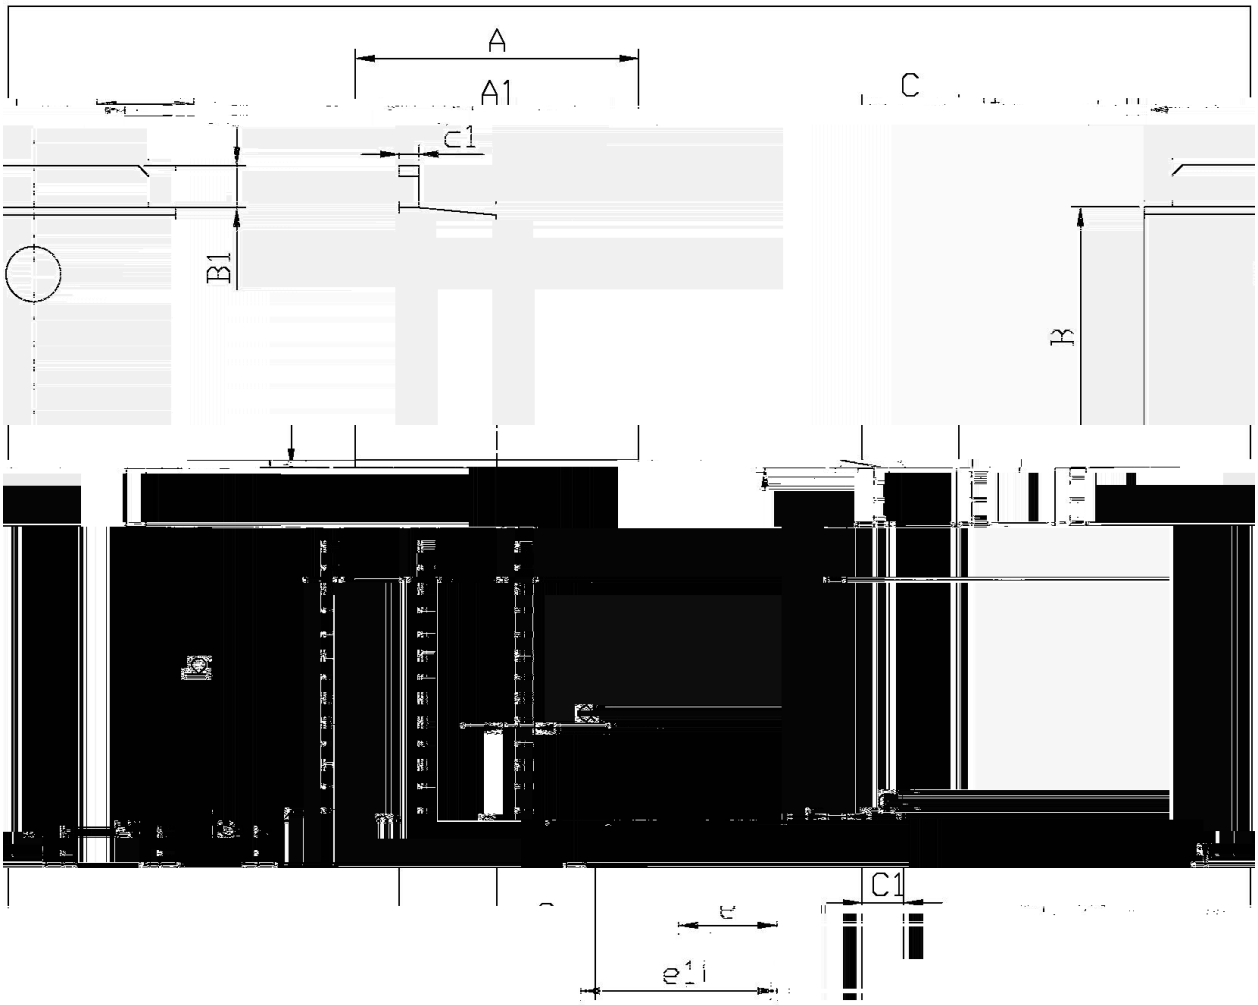

mm 单位:

Symbol	Min	Max	Symbol	Min	Max
A	6.45	6.75	b	0.50	0.70
A1	5.10	5.50	b	9.00	9.40
B	5.95	6.25	C	0.45	0.55
B1	0.95	1.25			

/ Marking Instructions

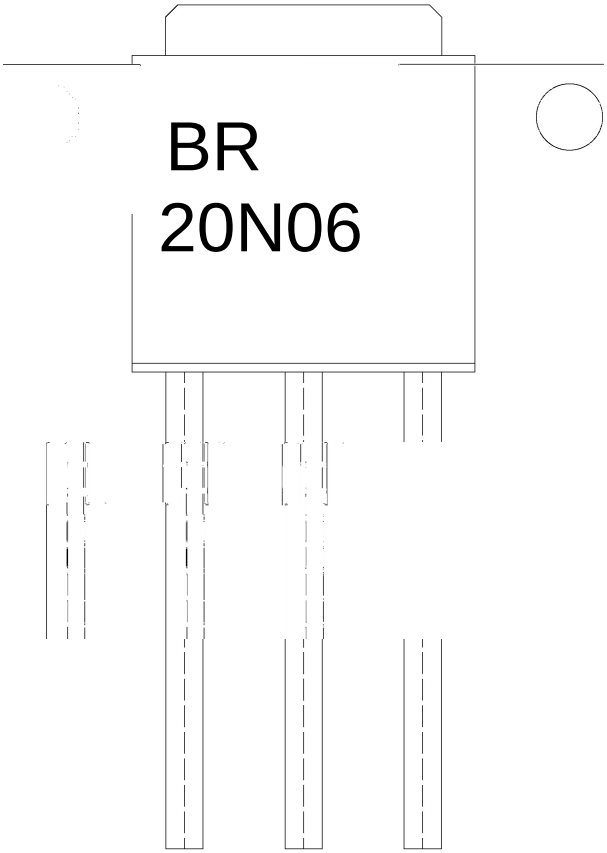

BR

20N06

Note:

BR:	Company Code
20N06:	Product Type.
****:	Lot No. Code, code change with Lot No.