ṂṂᵻ ᵴʃ ᷓᷮ Ẓ ᶯ

S

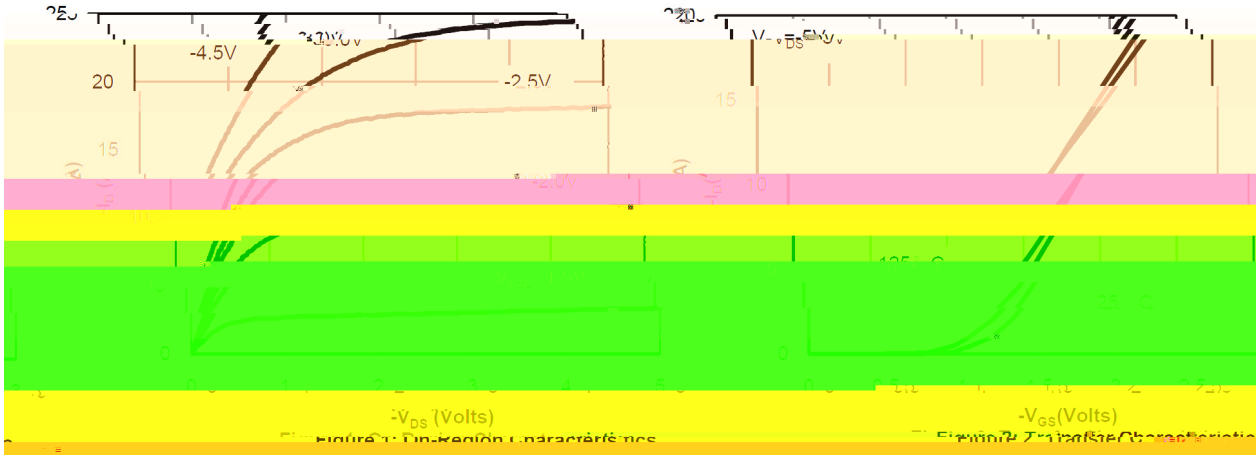
ҢṀᵑ ɔ ჭ ı Ầ ʁ ᦵ Ҥ ᵭ ȏ ı ҢṀᵑ ɔ я ı ṇ ғ ᵝ

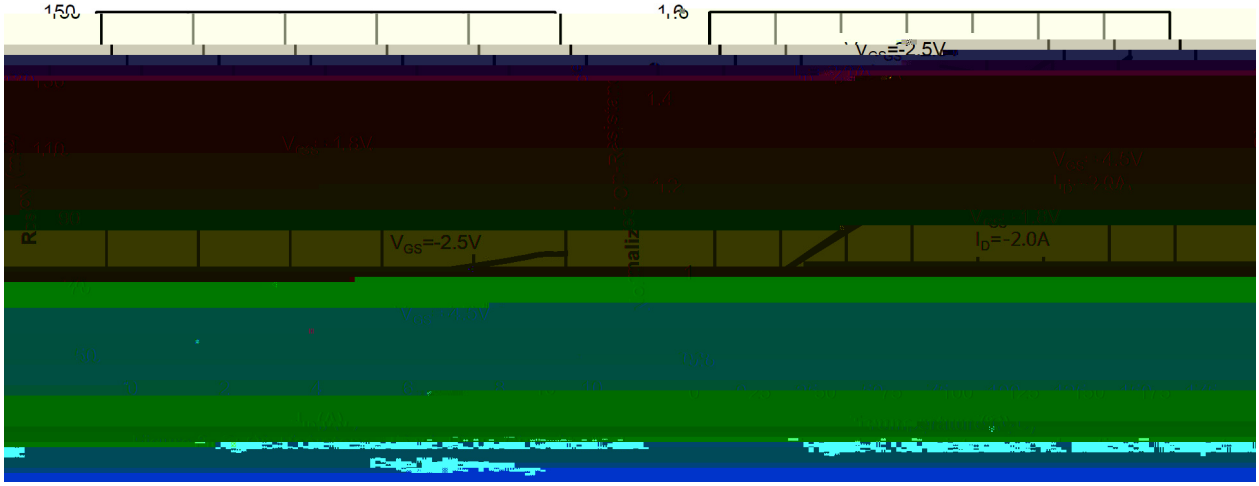
/ Absolute Maximum Ratings(Ta=25)

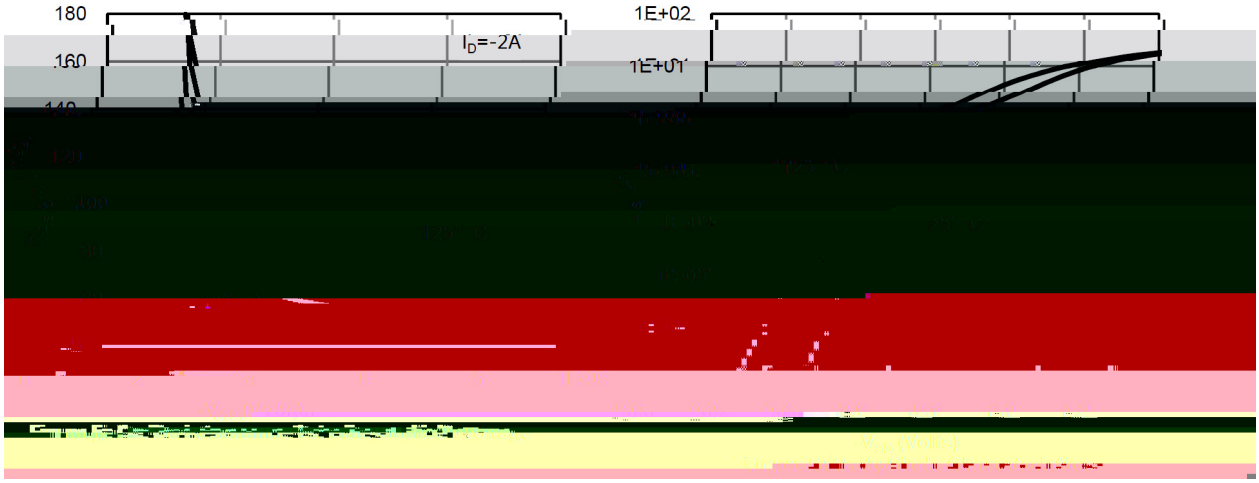
/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						Ω
						Ω
						Ω
						μ
		±			±	
						Ω
		Ω Ω				

/ Electrical Characteristic Curve







/ Electrical Characteristic Curve

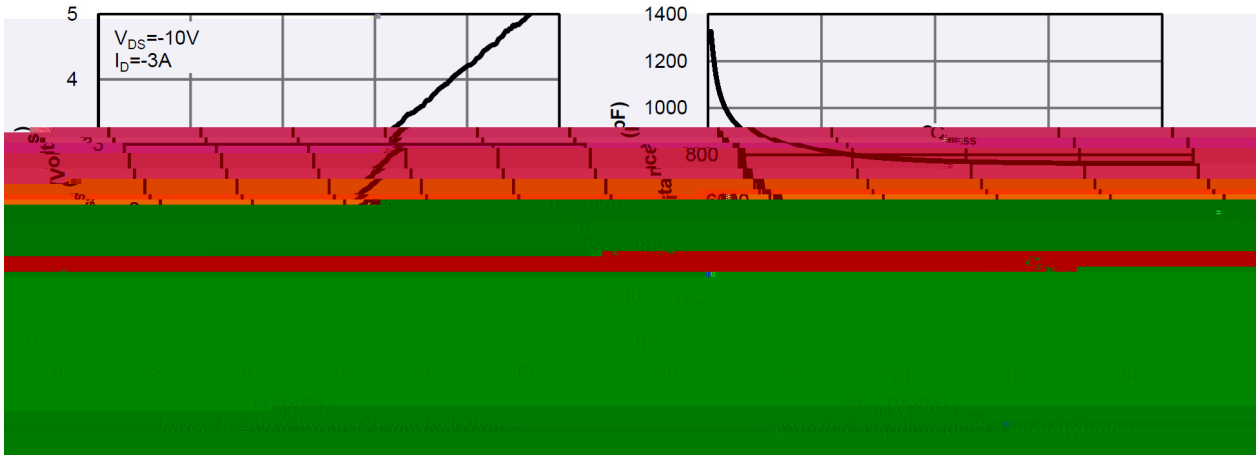
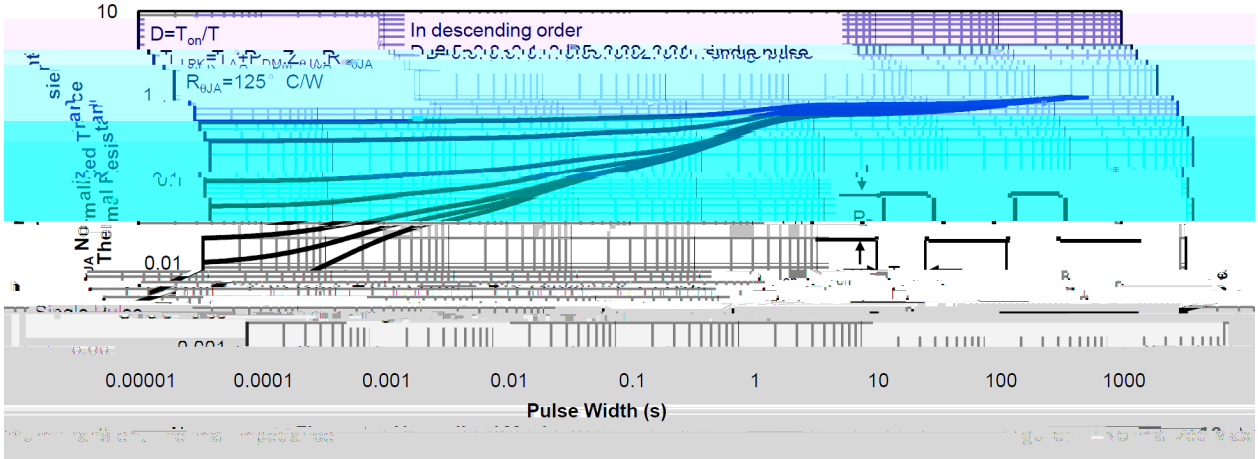
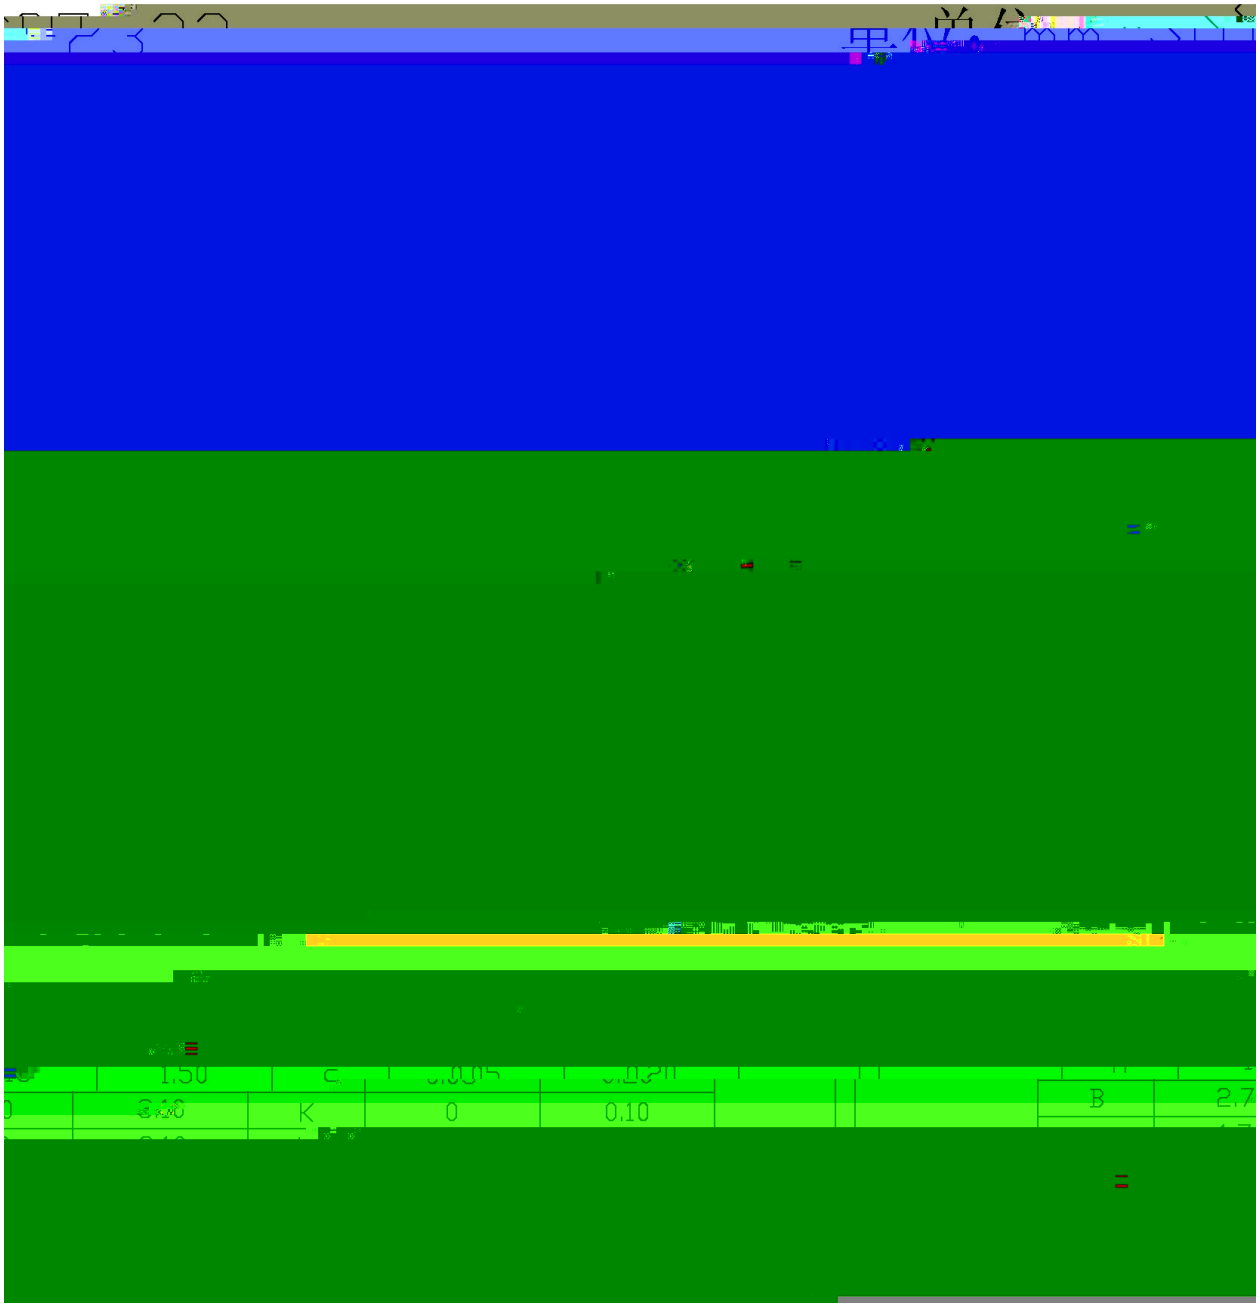


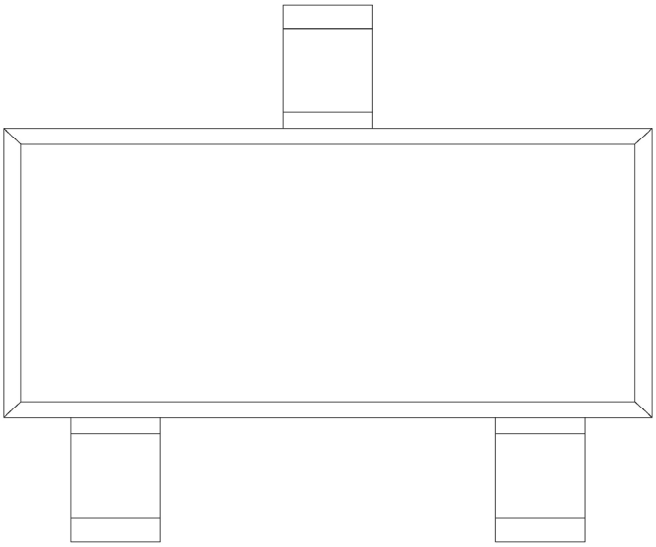


Figure 9: Maximum Forward Biased Safe Operating Area.



/ Package Dimensions





( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.