/ Descriptions


/ Features

Ω

Ω

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking


/ Electrical Characteristics(Ta=25)

		Ω Ω				


/ Electrical Characteristic Curve

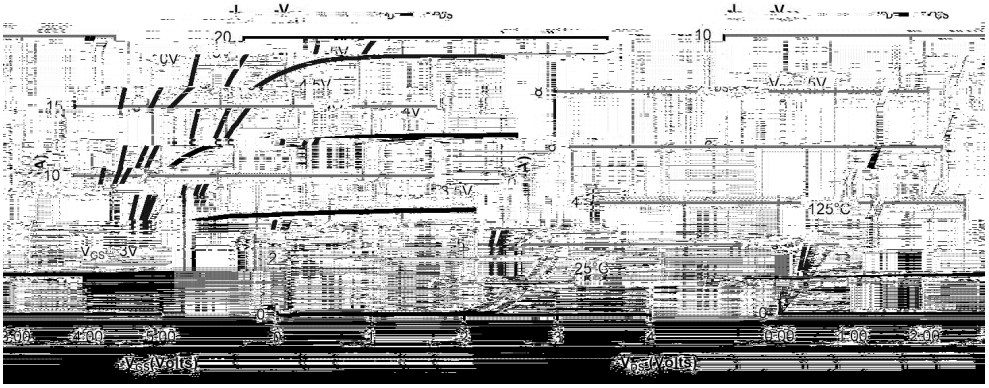


$R_{DS(ON)}$ — $-I_D$

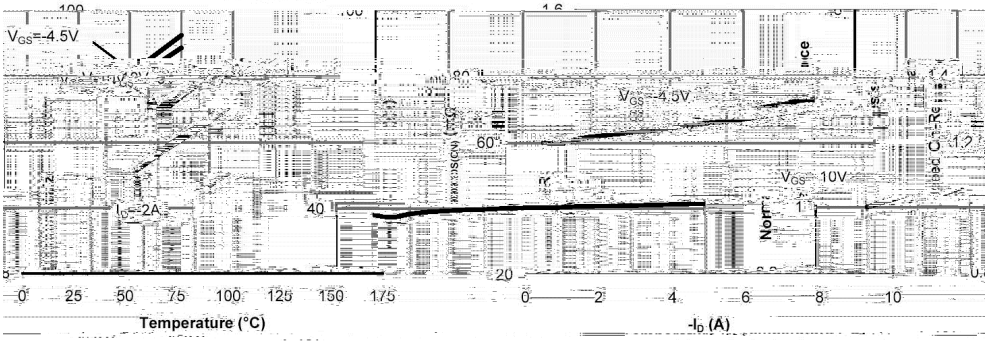


$R_{DS(ON)}$ — $-V_{GS}$ $-I_S$ — $-V_{SD}$

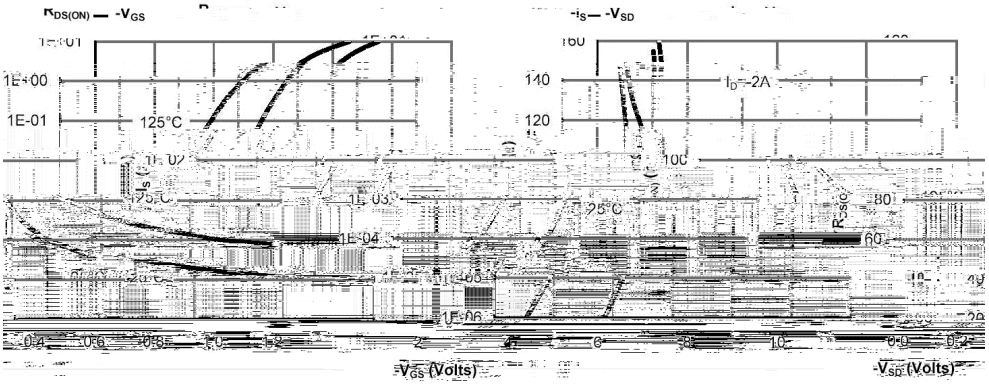


$-I_D$ — $-V_{DS}$

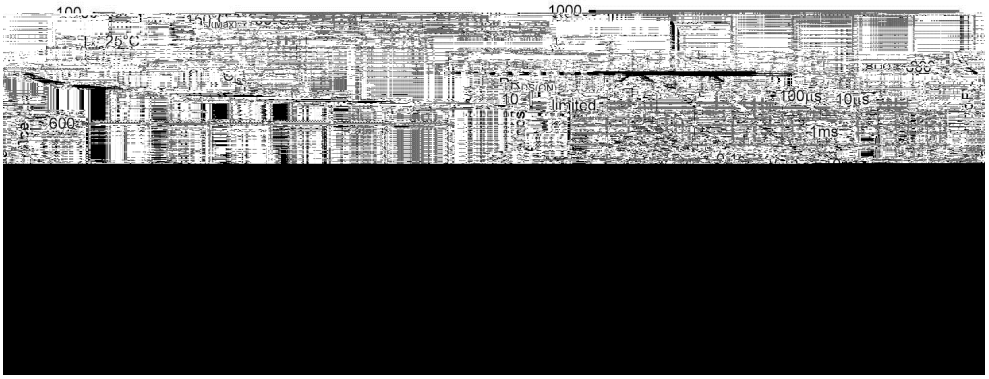


/ Electrical Characteristic Curve

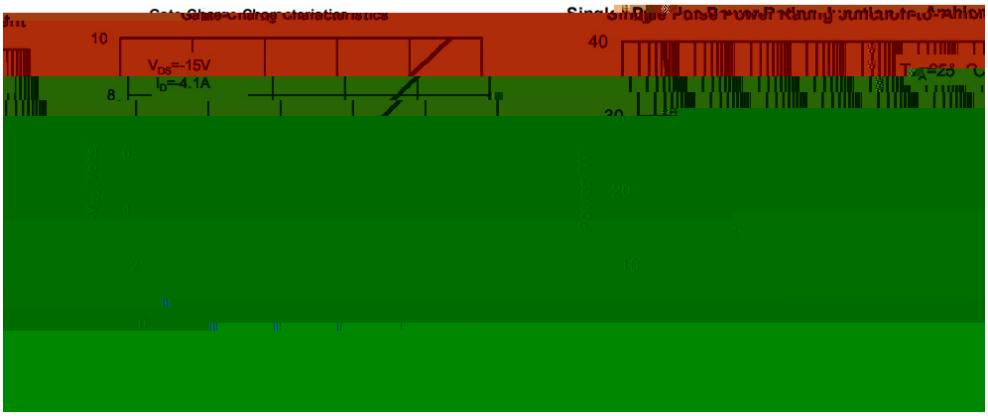


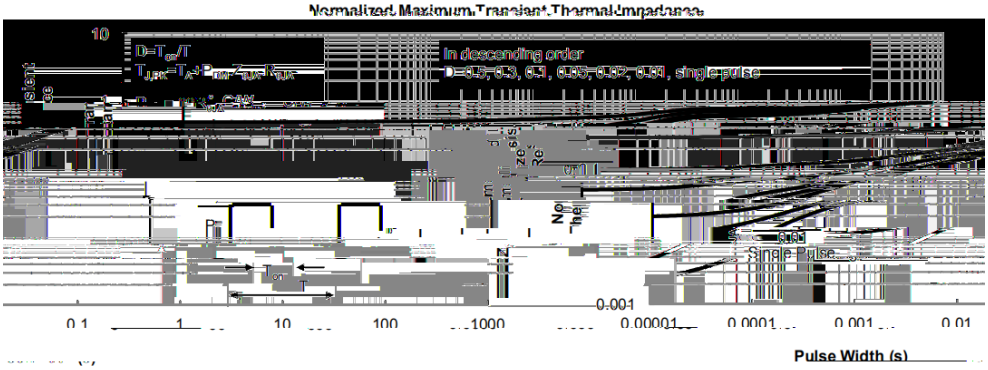

/ Package Dimensions

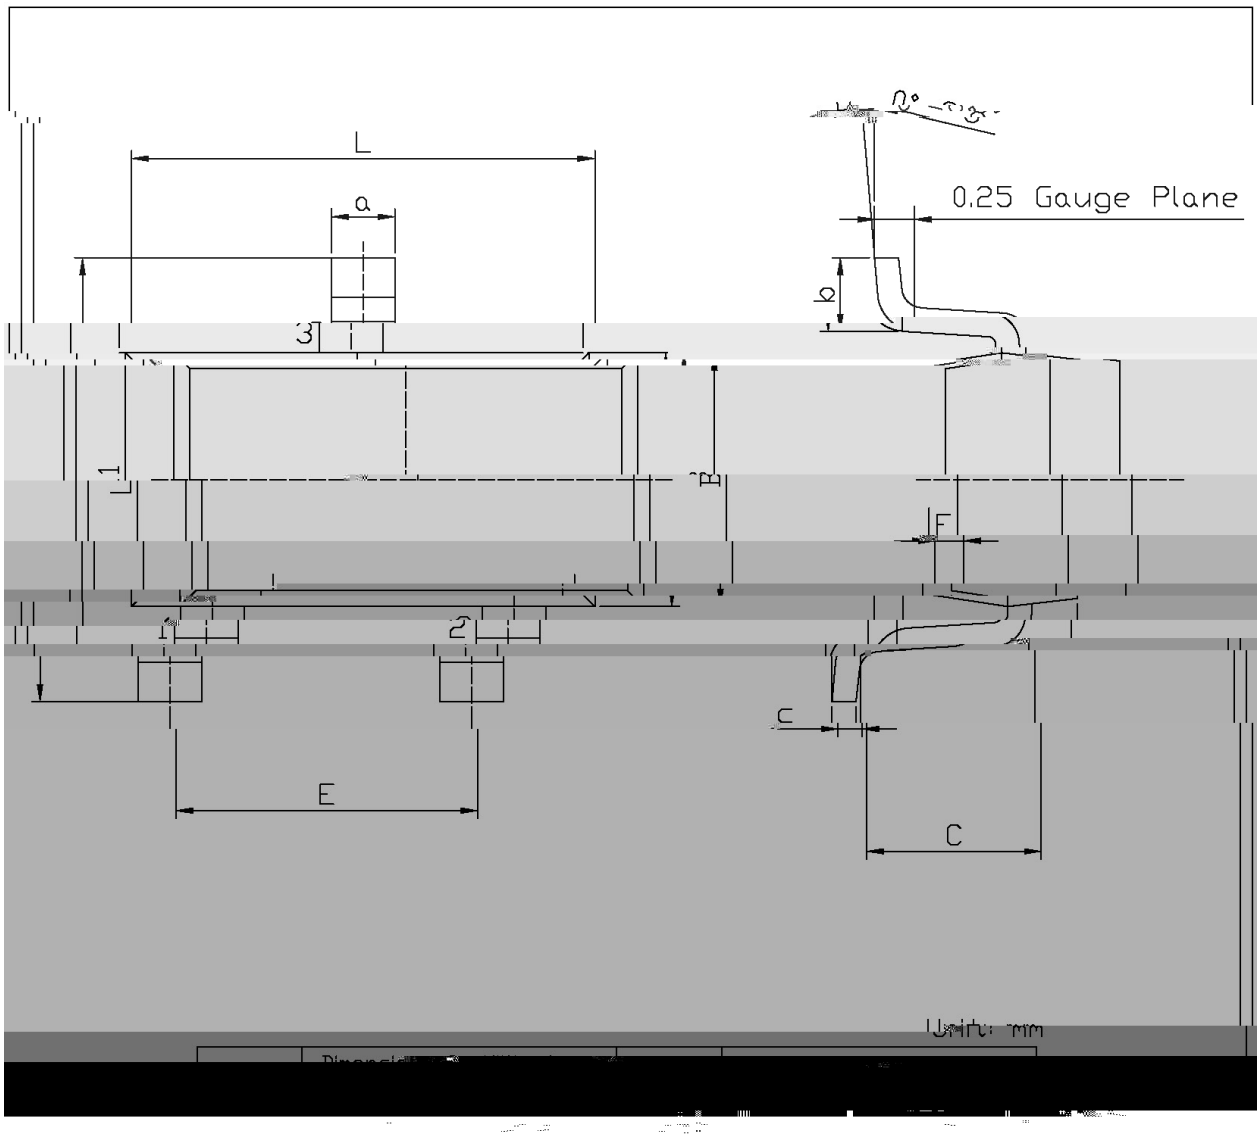

/ Marking Instructions

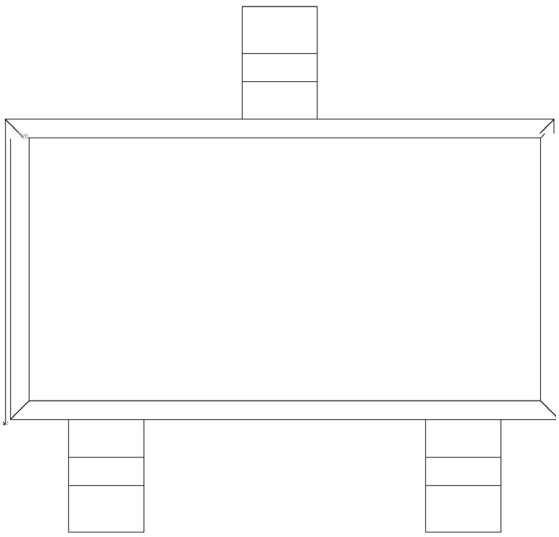

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.