

DFN1006-2L Plastic Package 1-Line,Bi-directional , ESD Protection Diode.

Ultra small package, Response Time is Typically < 1 ns, ESD > 30 kV per Human Body Model,IEC61000ī 4ī 2 Level 4 ESD Pob 9 b)9 %l 2


Parameter	Symbol	Rating	Unit
Peak Pulse Power(t_p = 8/20εs)			

/ Electrical Characteristic Curve(Ta=25)

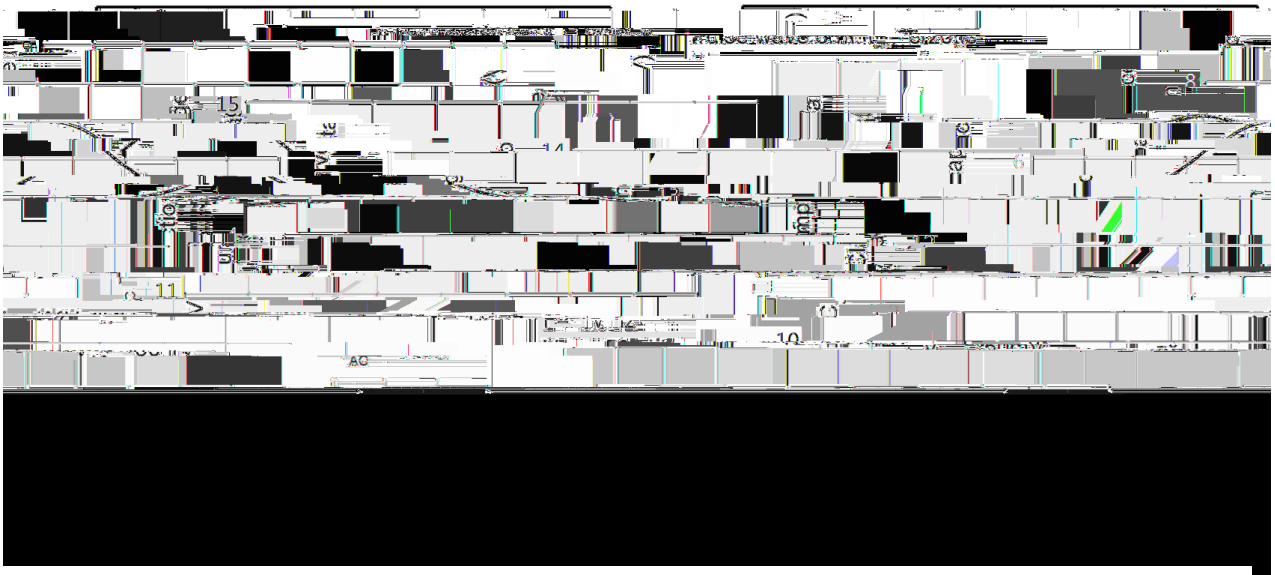

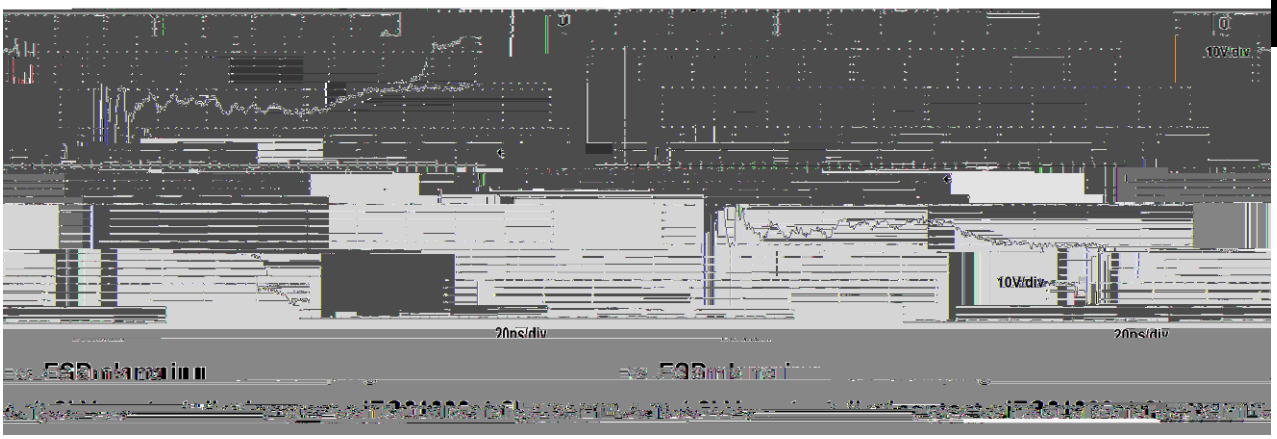

/ Package Dimensions

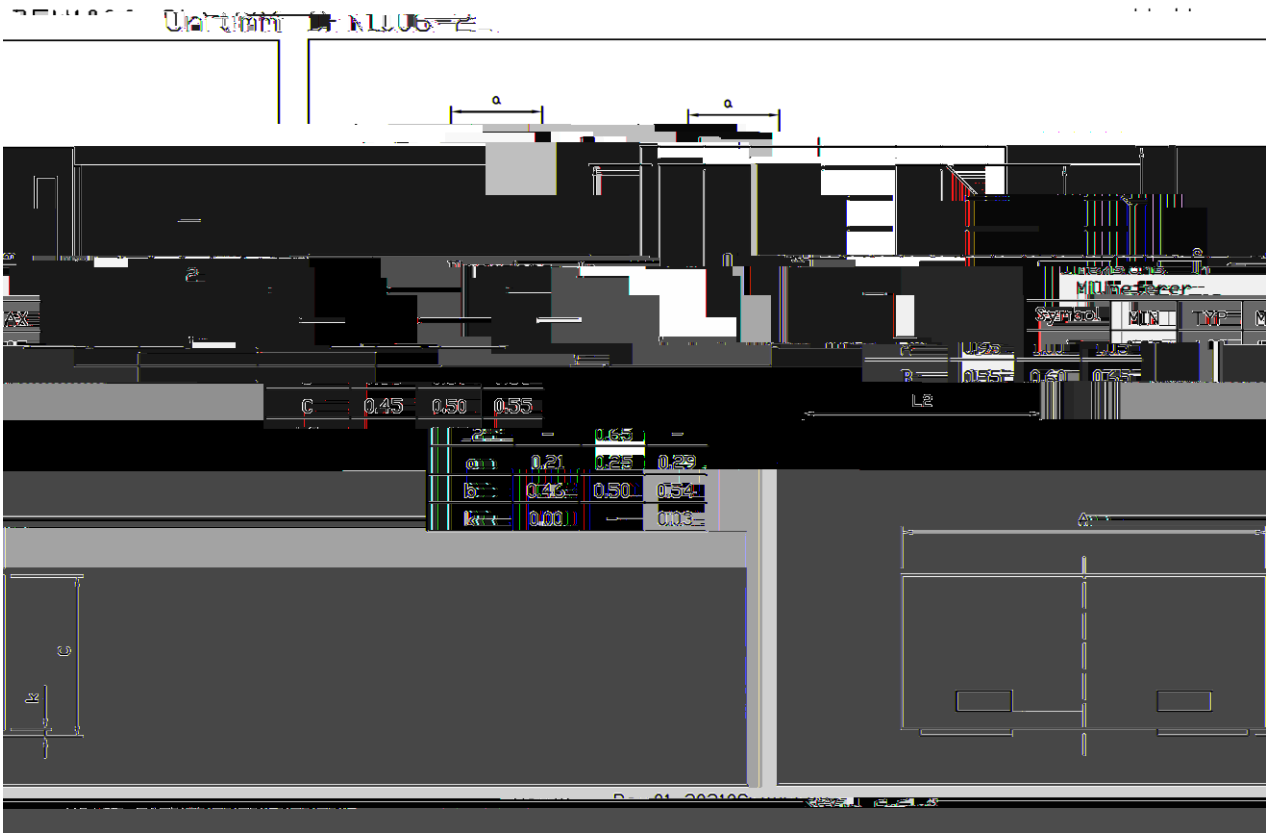

/ Marking Instructions

Q

Note

Q	Automobile halogen-free product Code
7A	Product Type Code

( ) /

Note:

1		150	200			60	120sec;	1.Preheating:150~200	, Time:60~120sec.
2		255	5				5 0.5sec;	2.Peak Temp.:255 5	, Duration:5 0.5sec.
3				2	10	/sec.		3. Cooling Speed: 2~10	/sec.

- C/60iona(e4( )-214( )-228MCID 8>> BDC q 52.216011(0 B2 r368)