GBU

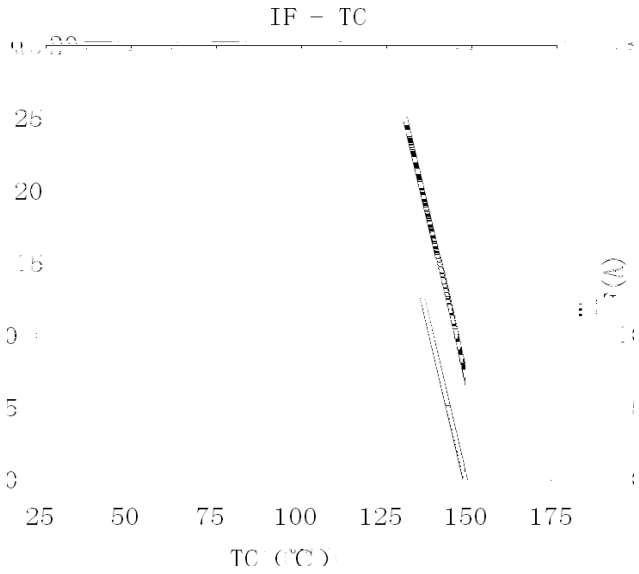
Ultrafast Recovery rectifier bridge in a GBU Plastic Package.

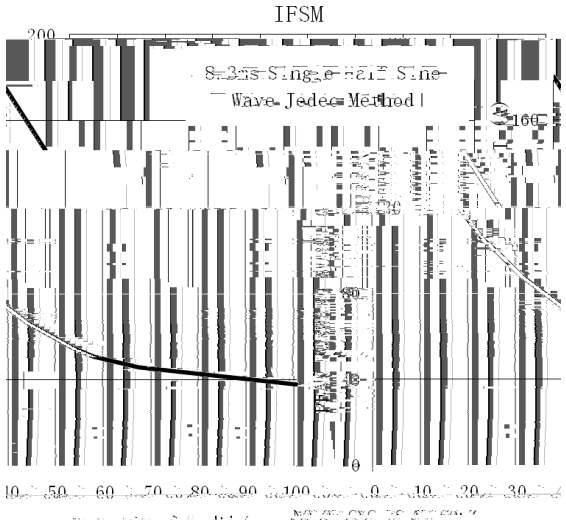
Glass passivated process to produce Ultrafast Recovery rectifier bridge ,with low reverse leakage current and high reliability.

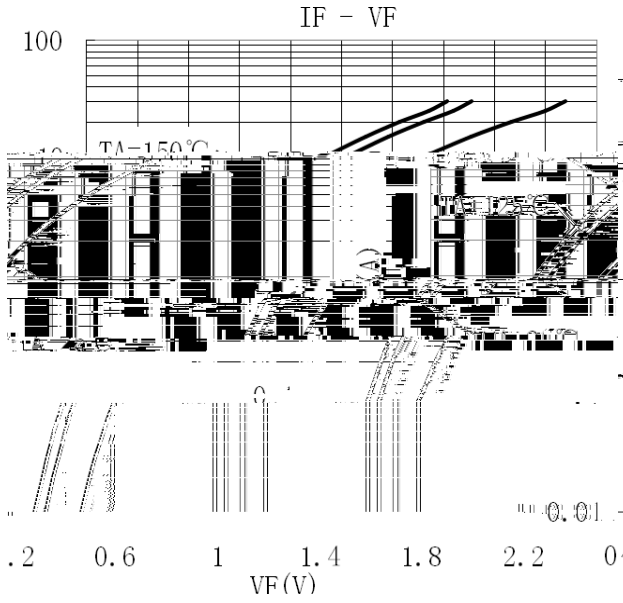
For high frequency, high voltage, high current rectifier diode, freewheeling diode

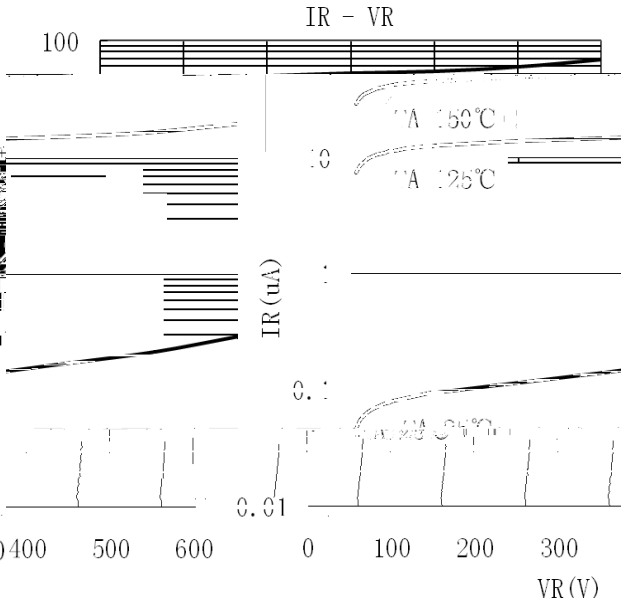
D4683.62 c2/Im1ÄDo D4629.3403 ẗ6n( )Tj.94468j12 4044688ic 7r2 0 g8326-2655.1257 TD-.001120

Parameter	Symbol	Rating

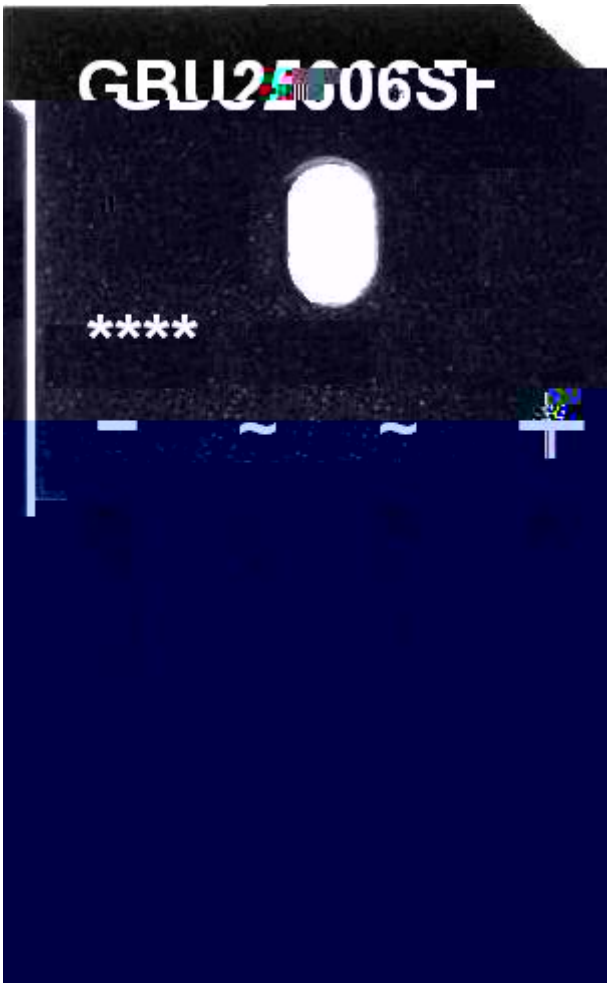

IF - TC
25
20
25
50
75
100
125
150
175
TC (℃)


IFSM
8.3ms Single Half Sine
Wave Jedec Method


IF - VF
100
.2
0.6
1
1.4
1.8
2.2
VF(V)


IR - VR
100
IR (uA)
0.01
0
100
200
300
VR(V)

Rev.A Jan.-2018



GBU2006SF

****

- AC +

Note:

GBU2006SF	Product Type
****	Lot No. Code, code change with Lot No.
- AC +	Pin function