
ṂṂ Ꝉ ᵴ ʃ ᷒ Ẓ ᶘ

Ҥ ɔ U/Ҥ ɾ ɨ ɔ ķ /Ầ ԋ ৯ ỷ ȏ


ᷮ ᳫ ı ' GF2GF ᷯ Ω ᵓ ı ' Ầ ԋ

V Ӧ	ϒ N	Ӧ Ё	D Ӌ


/ Electrical Characteristic Curve

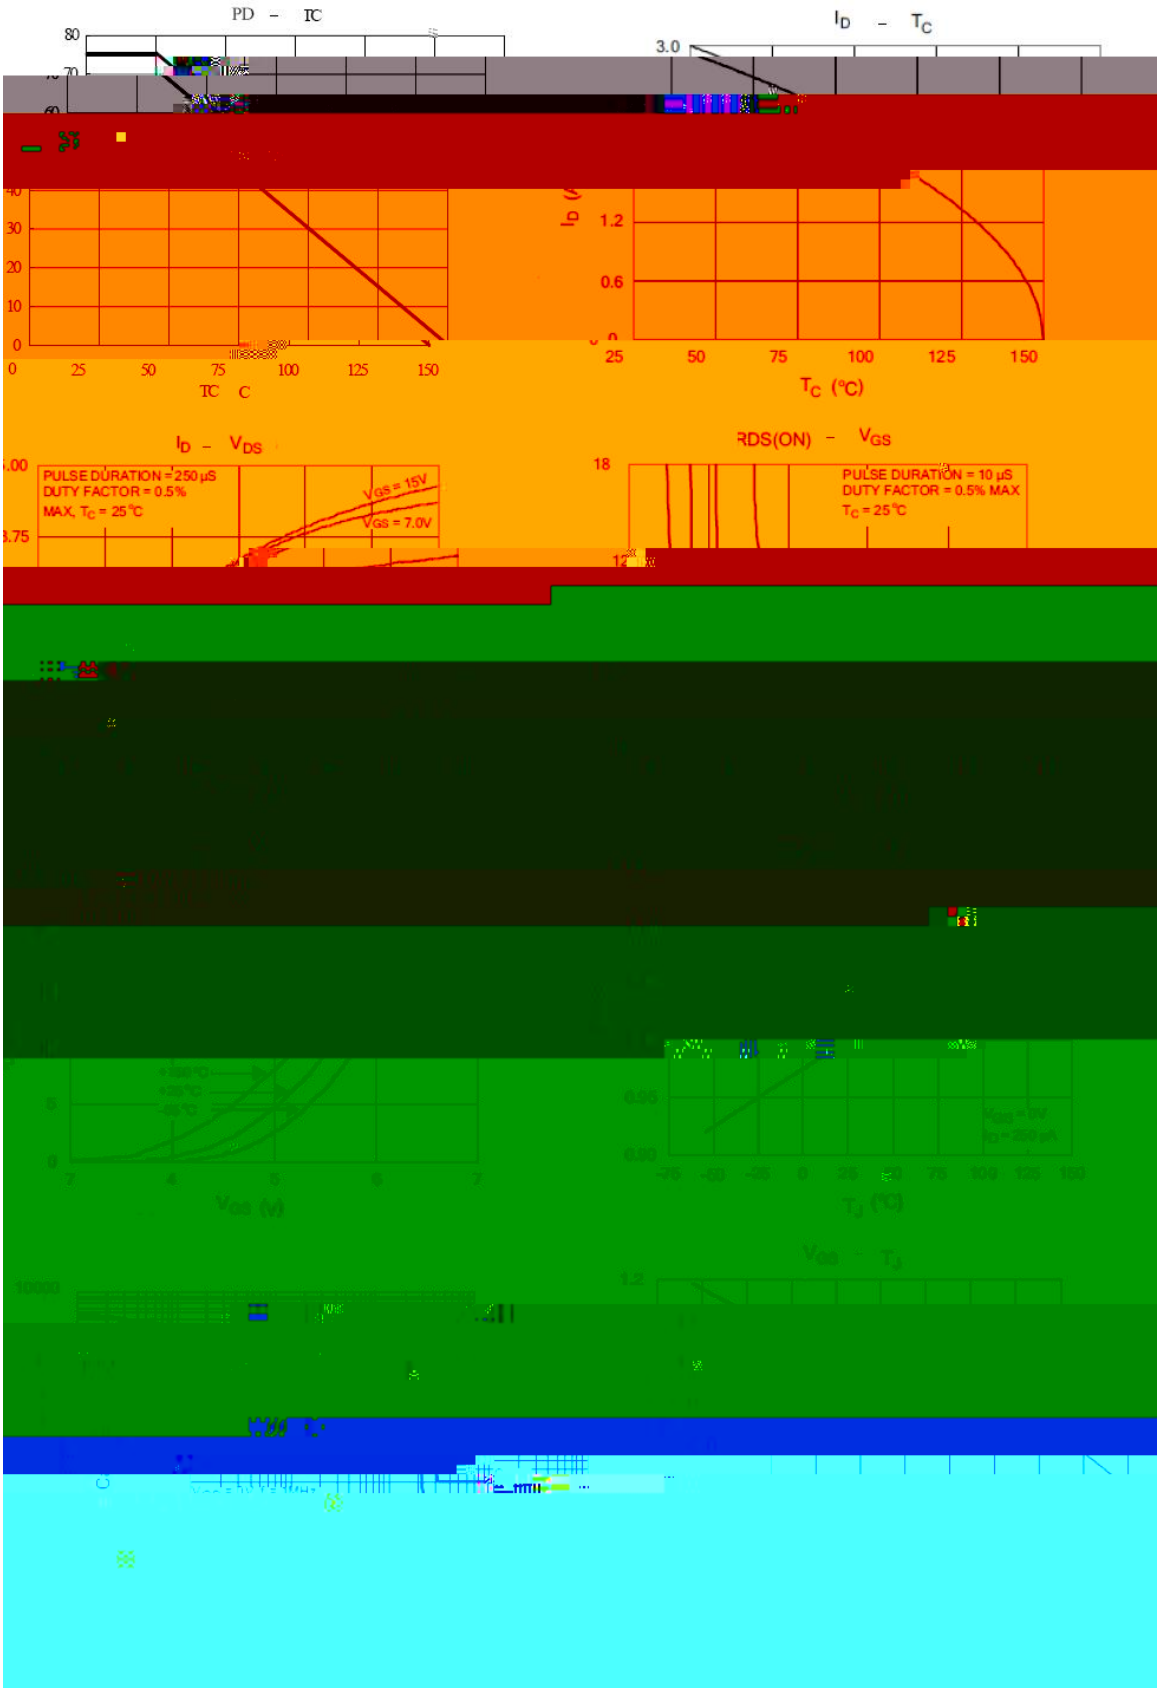

/ Package Dimensions

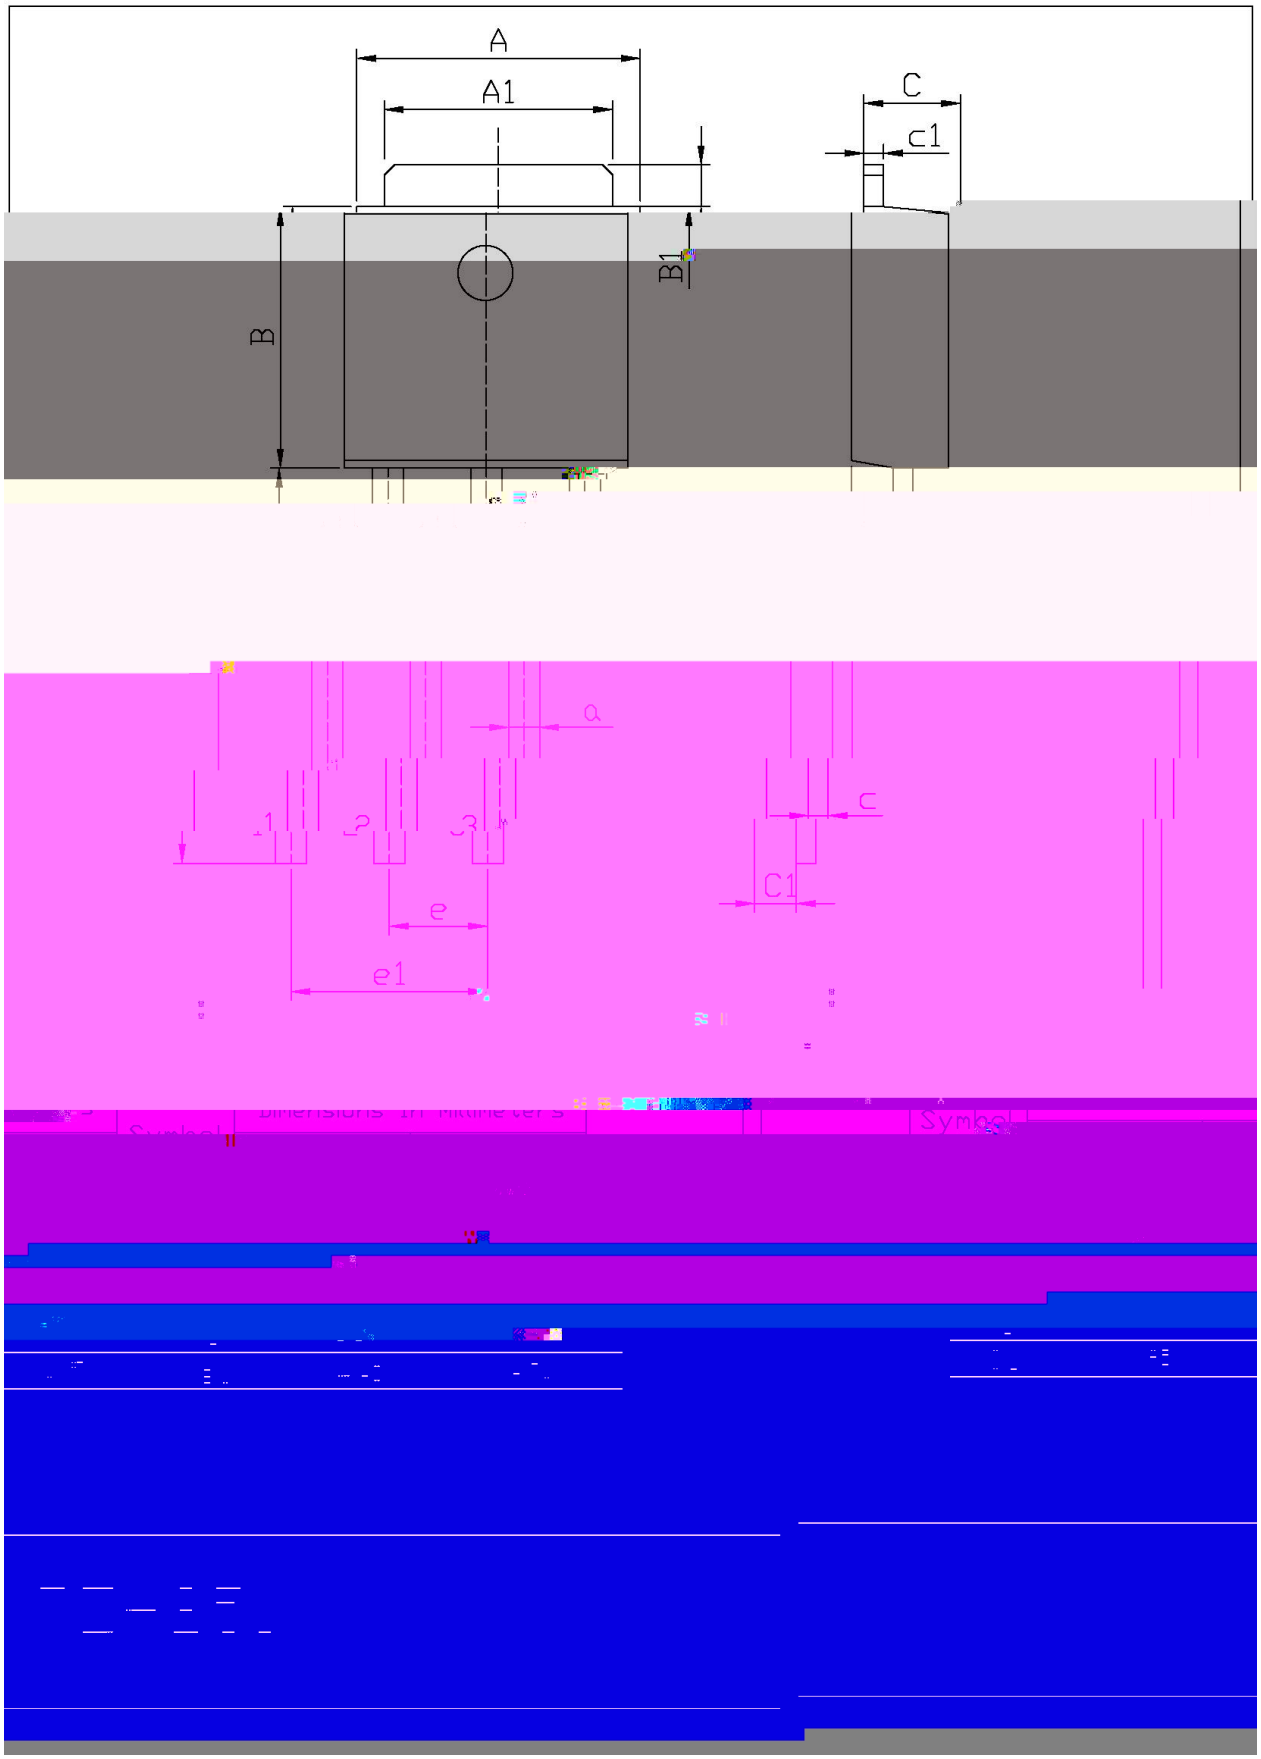

/ Marking Instructions

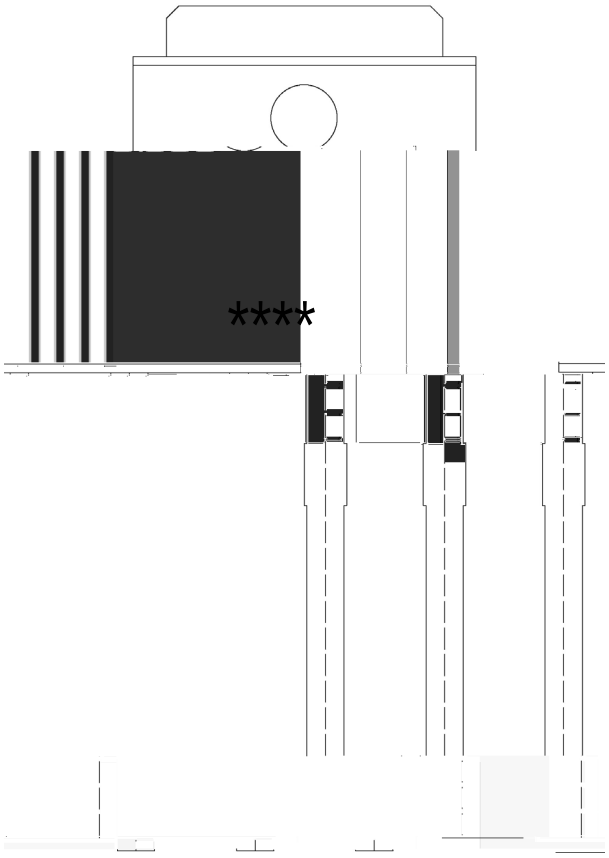

ب ˝ χ

χ ѭ ҙ и Ґђ

6Q ; 3 χ ѭ ʒ ɴ Ґђ

---- χ ѭ ɨ ғ ӈ ɴ Ґђ ɪ ɸ ɨ ғ ӈ ɴ Ψ ק

( ) / Temperature Profile for Dip Soldering(Pb-Free)



ب ˝ χ

Ĺ ♬ □ ẙ Ќ ɬ ı ̀H ڑ Ќ ɬ

Š Ө □ ẙ ° ɬ ı ̀H ڑ ̀Y ʌ ѭ ° ° ɬ °

ì ˙ ϒ ˛ ɔ ѡ ẙ ѭ Ќ ɬ ɬ

/ Resistance to Soldering Heat Test Conditions

□ ẙ χ ° ɬ ̀H ڑ χ °

/ Packaging SPEC.

̈Ω ţ ɣ Ь

封装形式	包装					包装尺寸 :		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-251	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195

˵ ϒ ɣ Ь