

**BRI5N60**

## / Package Dimensions

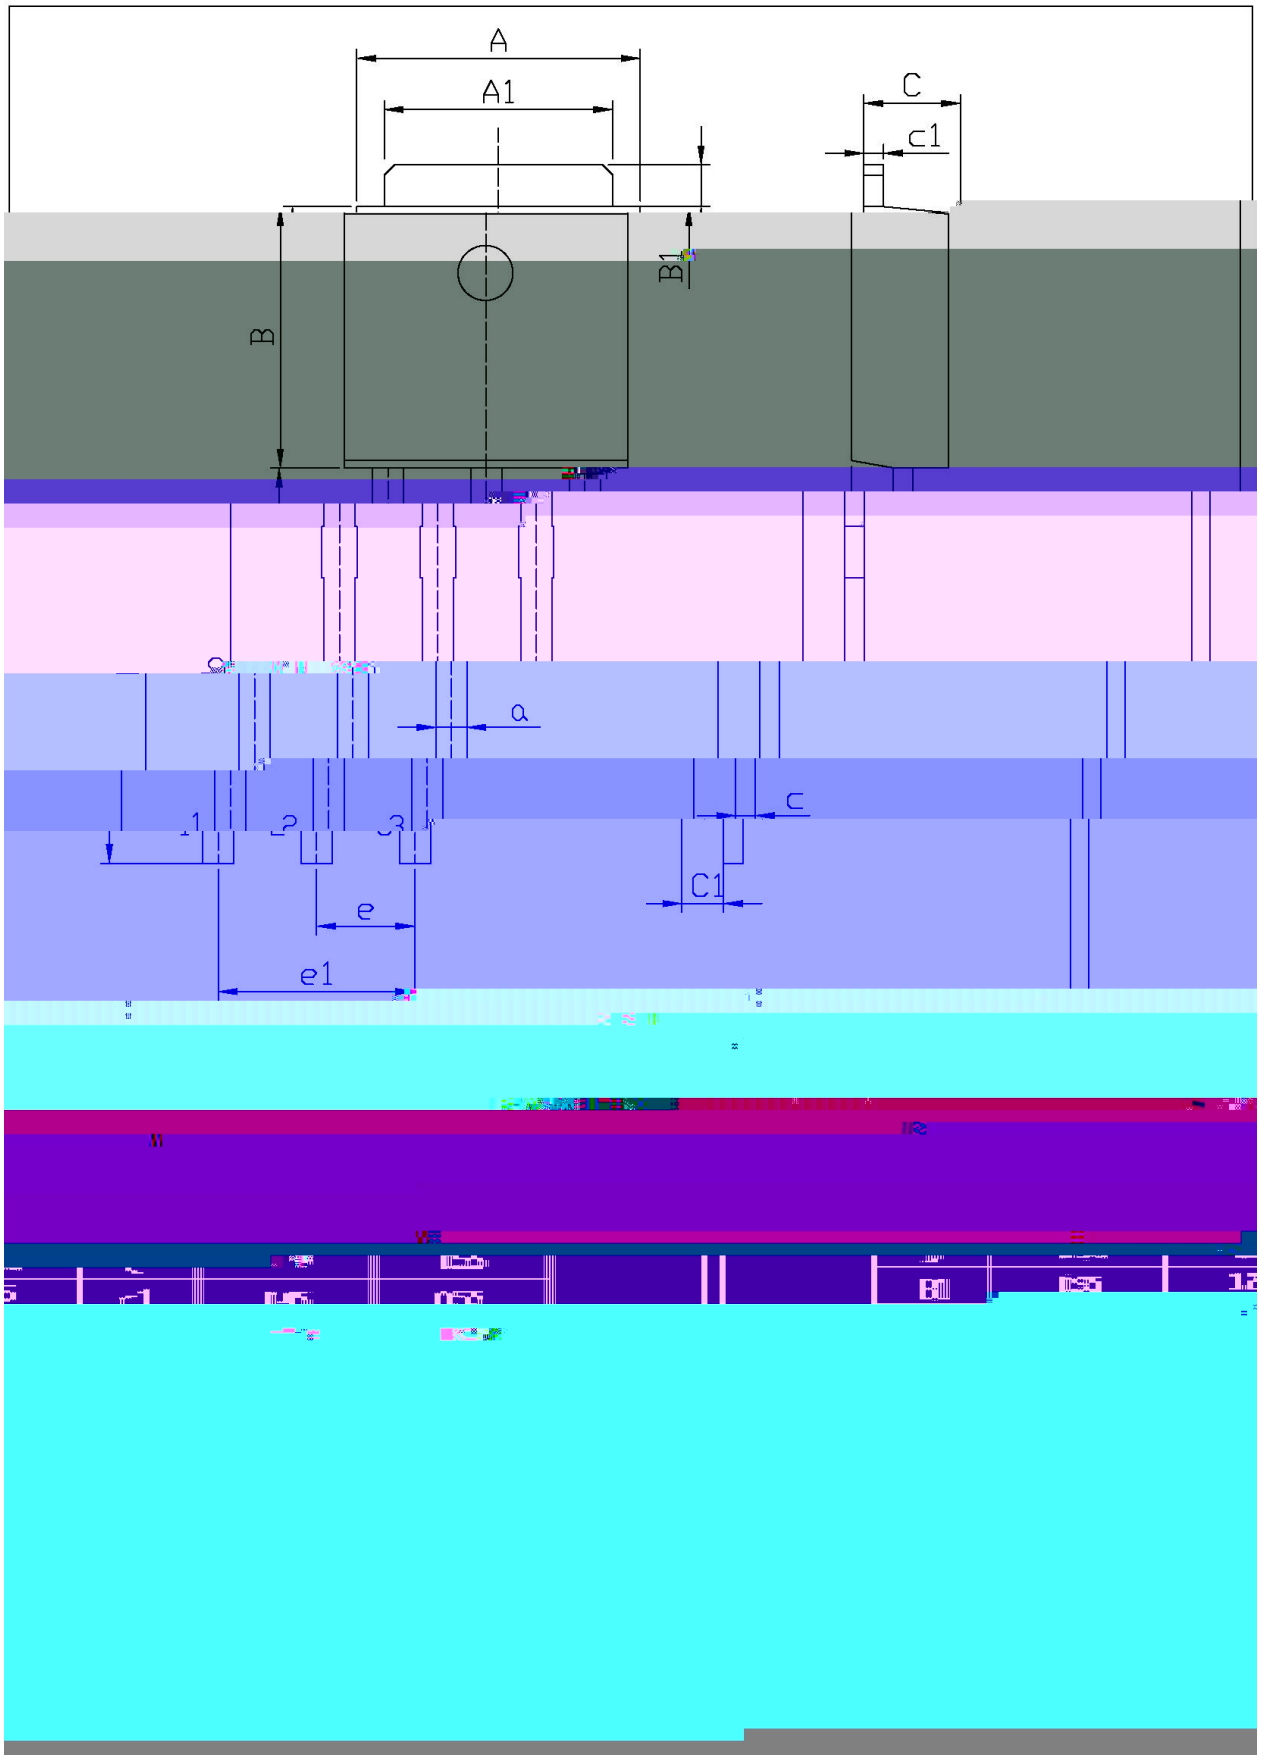

## / Marking Instructions

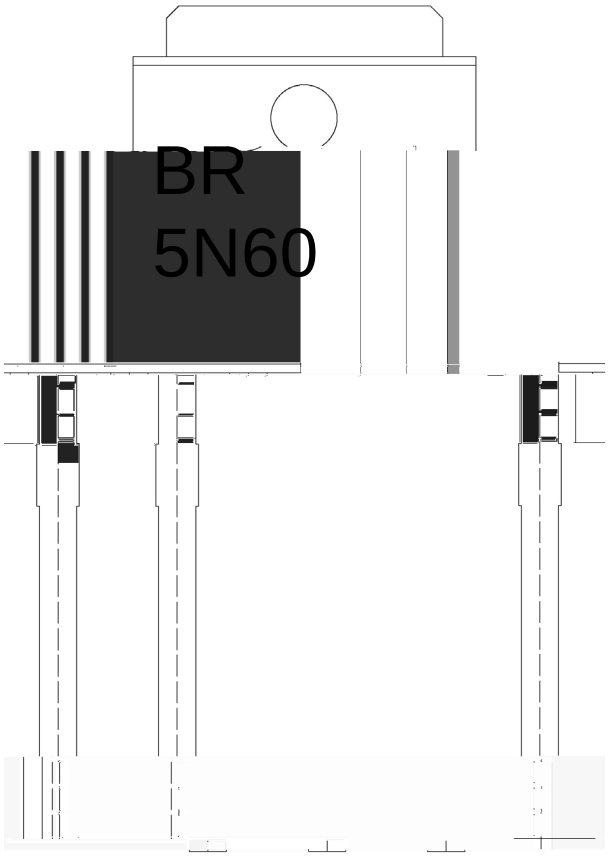


BR


5N60

****

Note:

| | |
|---|---|
| BR: | Company Code |
| 5N60: | Product Type. |
| ****: | Lot No. Code, code change with Lot No. |

## ( ) / Temperature Profile for Dip Soldering(Pb-Free)

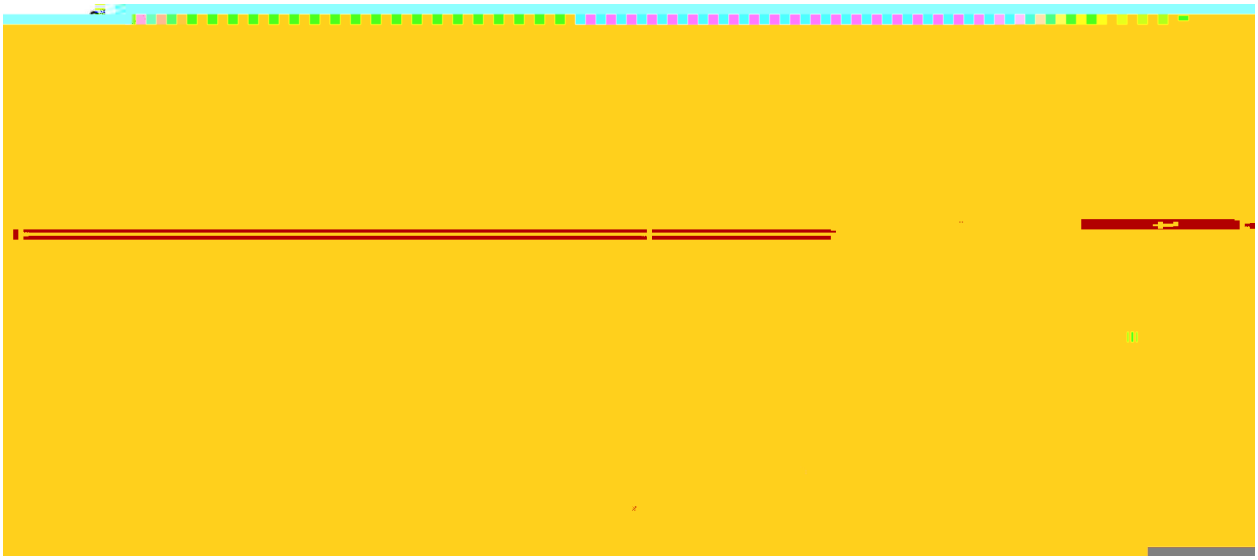

| | | | | |
|---|---|---|---|---|
| | | | | Note: |
| 1 | 25 | 150 | 60 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

## / Resistance to Soldering Heat Test Conditions

| | | | |
|---|---|---|---|
| 270±5 | 10±1 sec. | Temp.:270±5 | Time:10±1 sec |

## / Packaging SPEC.

/ BULK

| Package Type | Units | | | | | Dimension | | (unit mm$^3$) |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |
| | | | | | | | | |

/ TUBE

| Package Type | Units | Dimension | (unit mm$^3$) |
|---|---|---|---|