B	2348-7				
C	2349-43-25				

TO-263
Schottky Barrier Diode in a TO-263 Plastic Package.

Low forward voltage drop, low power losses,High efficiency operation. HF Product.

¥ ¦ § ¨ © ª « ¬ - ® ¯ ° ± ² ³ ´ OR-µ¶ ·
DC-DC ¸ ¯ ¹ º ª «
For use in solar cell junction box as a bypass diode for protection,For use in high frequency inverters, switching power supplies, freewheeling diodes,OR-ing diode, dc-to-dc converters and reverse battery protection.




PIN1 » Anode PIN 2¼4 » Cathode PIN 3 » Anode

/ h_{FE} Classifications & Marking

½ ¾ ¿ See Marv

Parameter	Symbol	Rating	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	V

/ Package Dimensions

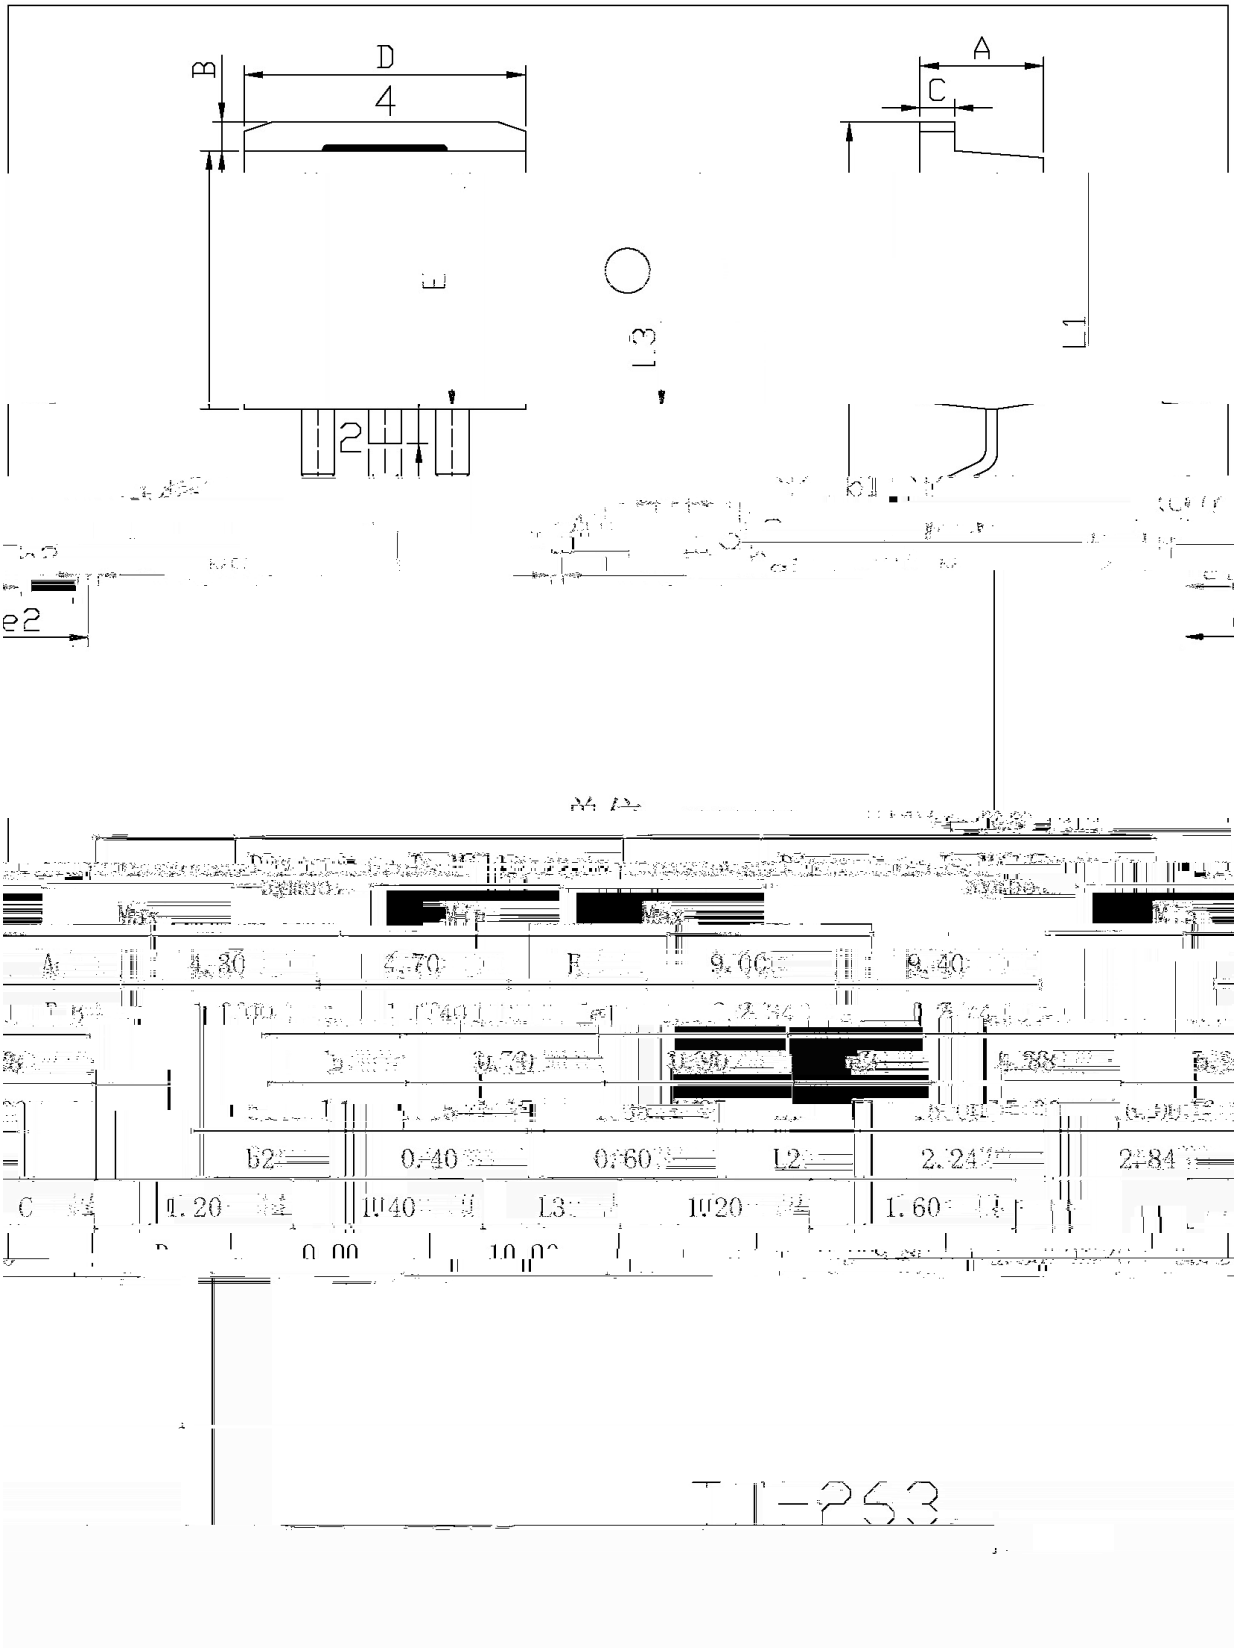

(