
TO-220F


Schottky Diode in a TO-220F Plastic Package.


Low power loss,high efficiency1om Pac(p9þõv.-dRRBÀZŽ6&C5ñ1"3ì¢Q)FTP5x635x6ÿ6,h43"5

Parameter	Symbol


/ Electrical Characteristic Curve

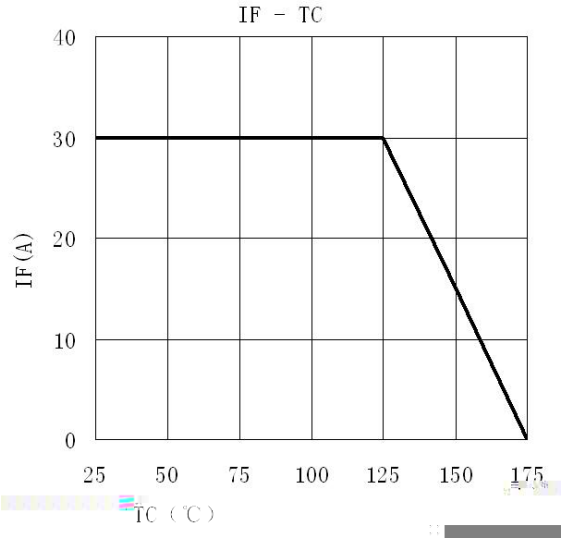

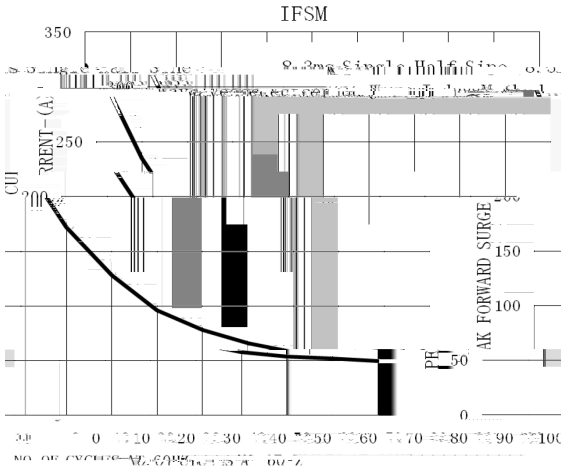

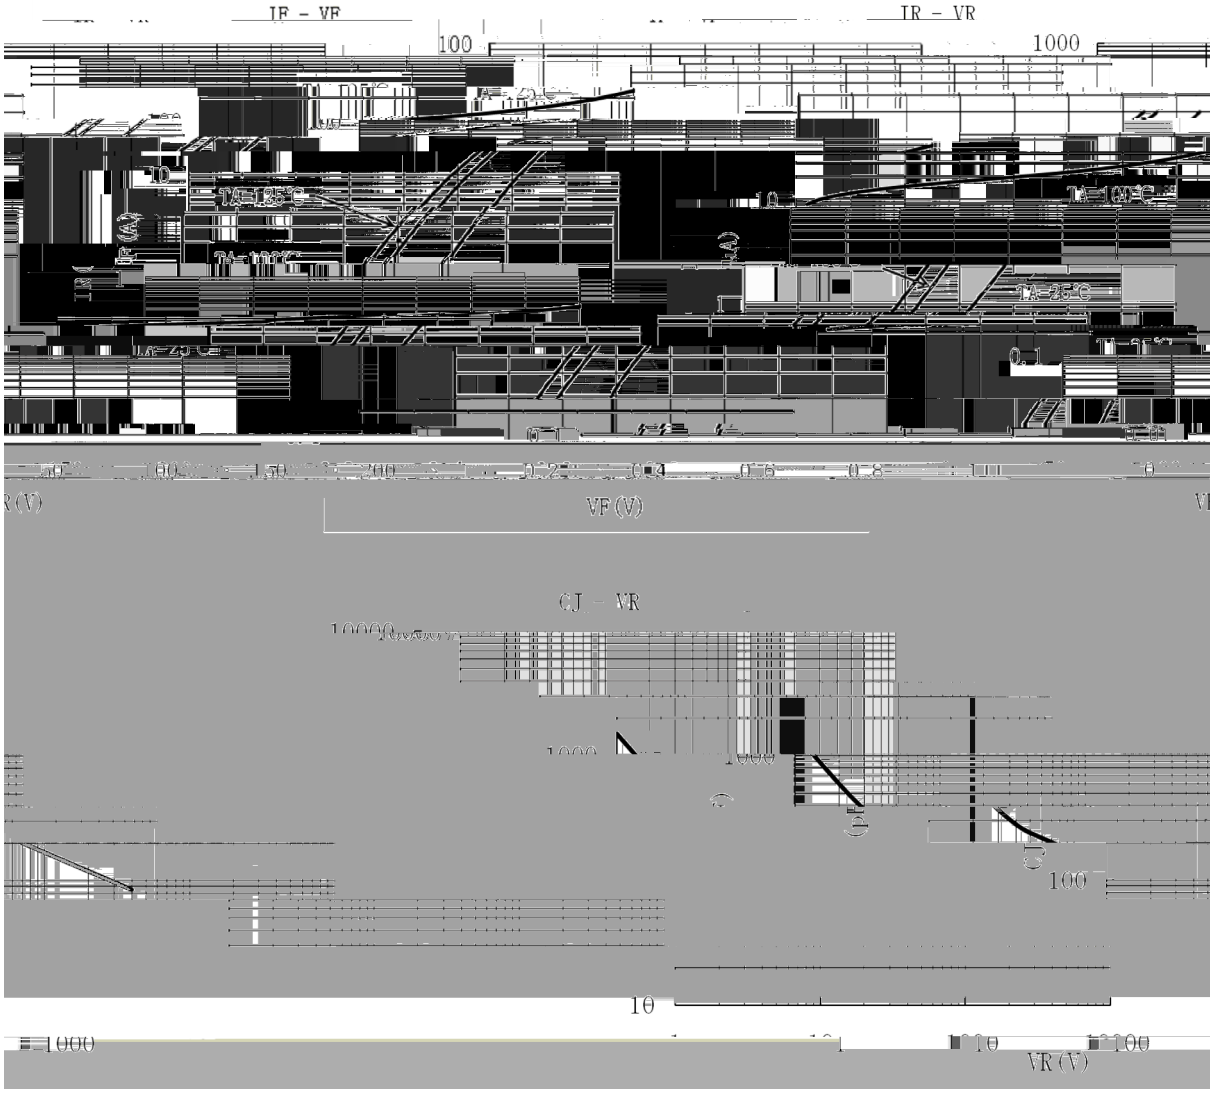


/ Package Dimensions

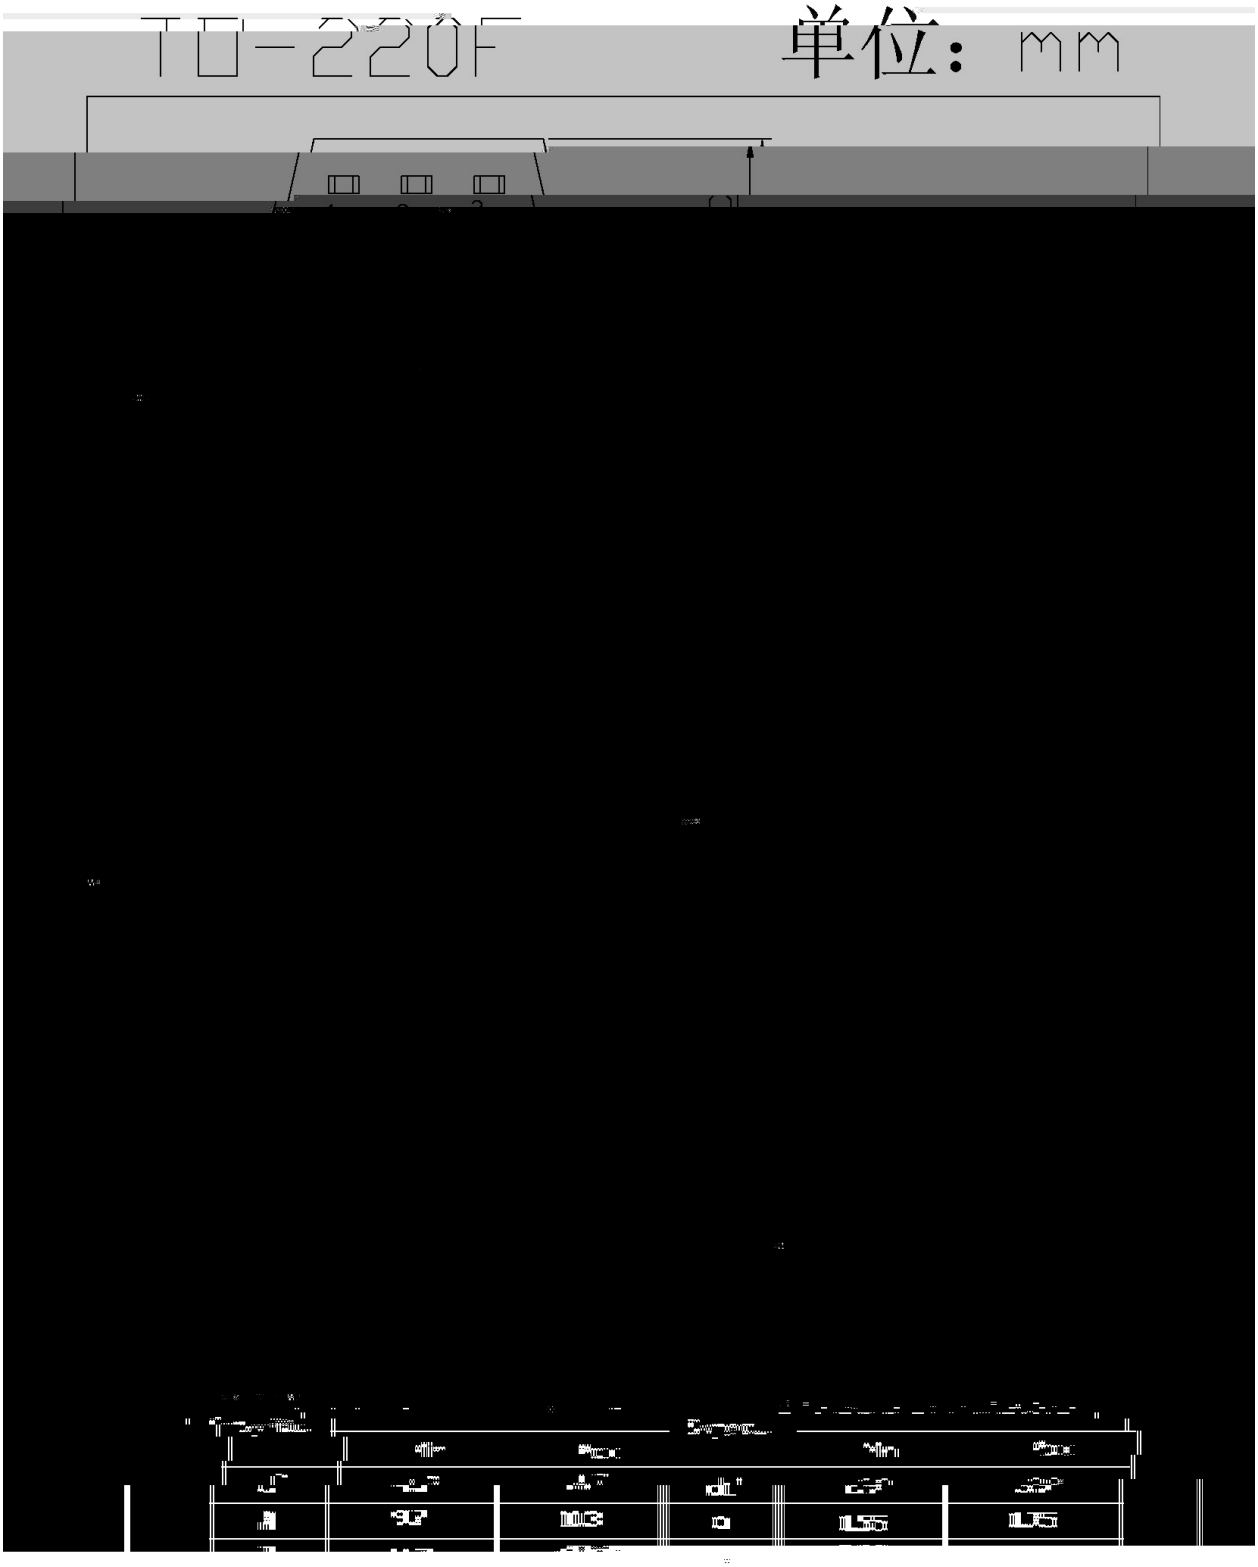

- ÿ ÿ ÿ ÿ

( ) / Temperature Profile for Dip Soldering(Pb-Free)

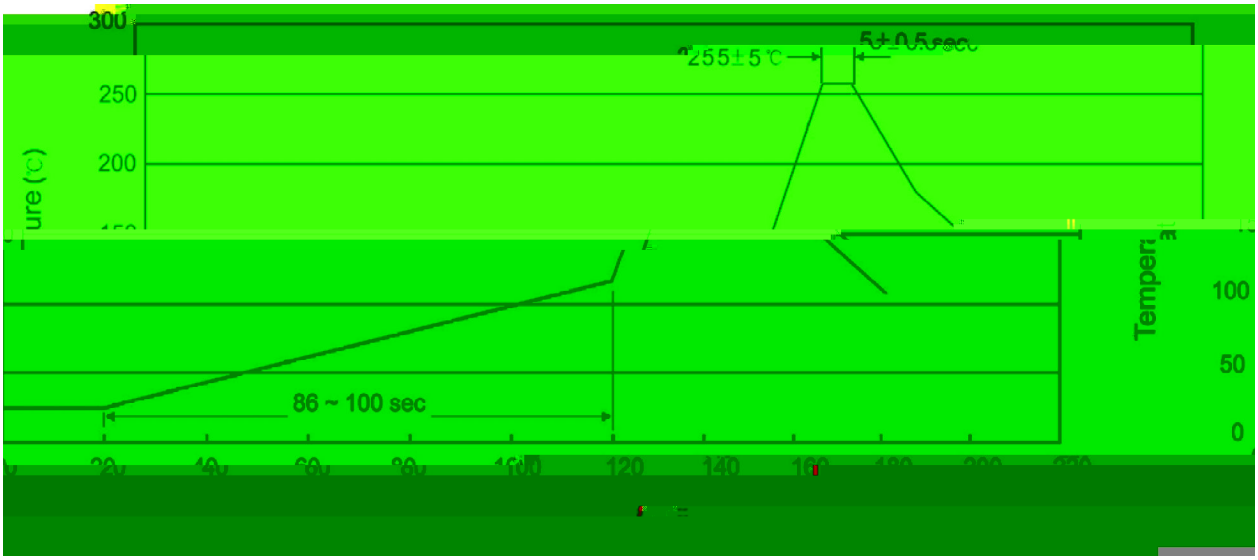

				Note:	
1	25	150	60 90sec;	1.Preheating:25~150	, Time:60~90sec.
2	255±5		5±0.5sec;	2.Peak Temp.:255±5	, Duration:5±0.5sec.
3		2 10	/sec.	3. Cooling Speed: 2~10	/sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm³)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type	Units					Dimension		(unit mm³)
	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices