

WR0596 ḶḶŁ ʌ ȍ Ỡ ʰ‿ ǁ ᒣ

v ‴Ω Parameter	ϒ N Symbol	‴Ω Ö Rating	D Ч Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
RMS Voltage	V_{RMS}	420	V
DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward Current	I_F	1 30	A
Peak forward surge current	I_{FSM}	300	A
Typical Thermal Resistance Junction to Case	$R_{\theta Jc}$	2.0	/W

/ Electrical Characteristic Curve

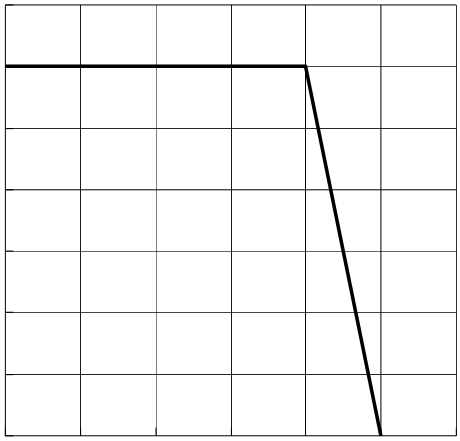

/ Package Dimensions

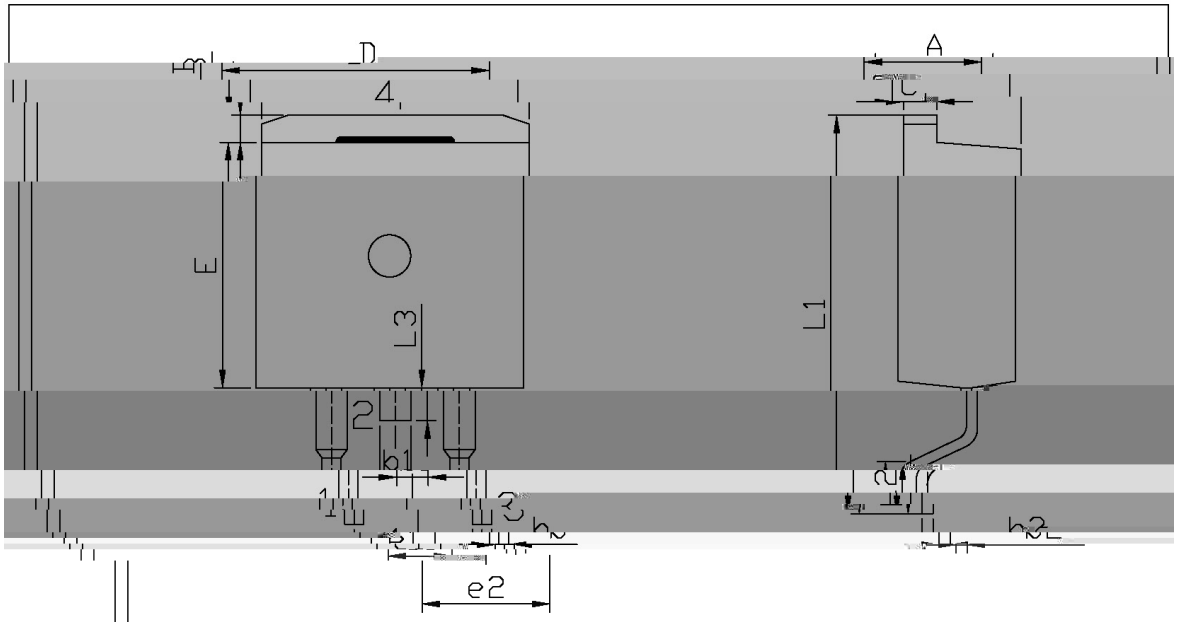

单位：mm

Dimensions In Millimeters		Dimensions In Millimeters			
Max		Min	Max		Min
9.40	A	4.30	4.70	L	9.00

/ Marking Instructions

ِ ˝ χ

EU χ

P XU6393 χ

---- χ

Note:

BR: Company Code

MUR3060 χ Product Type.

****: Lot No. Code, code change with Lot No.