50V~1000V　　2.0A　SMAF

Note:

1 Measured at 1 MHz and applied reverse voltage of 4 V D.C

2 P.C.B. mounted with 2.0 X 2.0" (5 X 5 cm) copper pad areas.

Parameter	Symbol	Test condition	Rating	Unit
Maximum Instantaneous Forward Voltage	V_F	I_F=2.0A	1.1	V
Maximum DC Reverse Current at Maximum DC Blocking Voltage	I_R	T_a=25	5.0	uA
		T_a=125	100	

/ Electrical Characteristic Curve

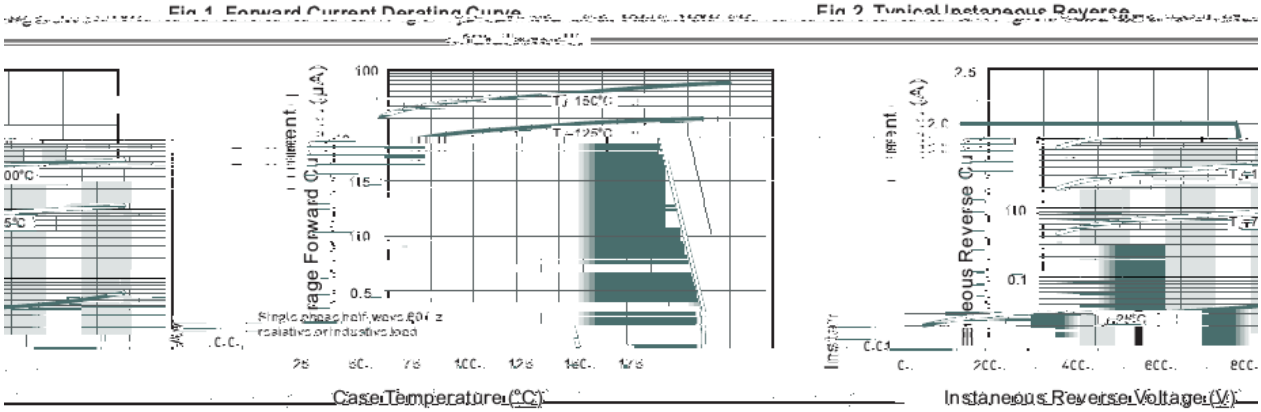


Fig.3 Typical Forward Characteristic



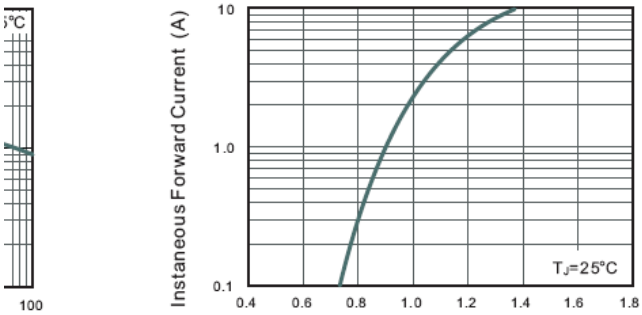


Fig.4 Typical Junction Capacitance



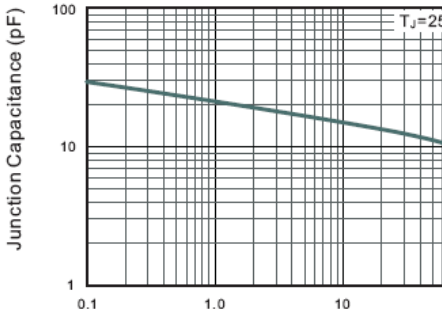

/ Package Dimensions

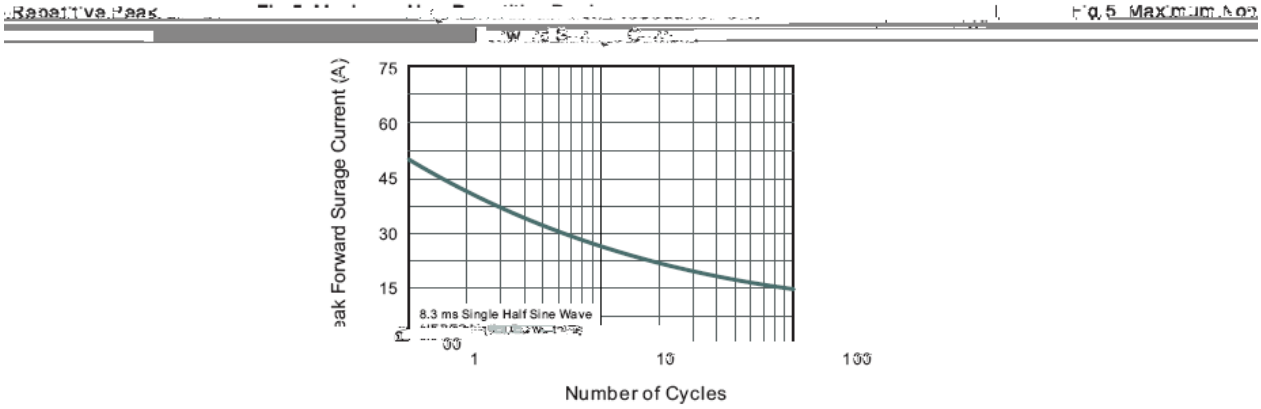