

/ Electrical Characteristic Curve

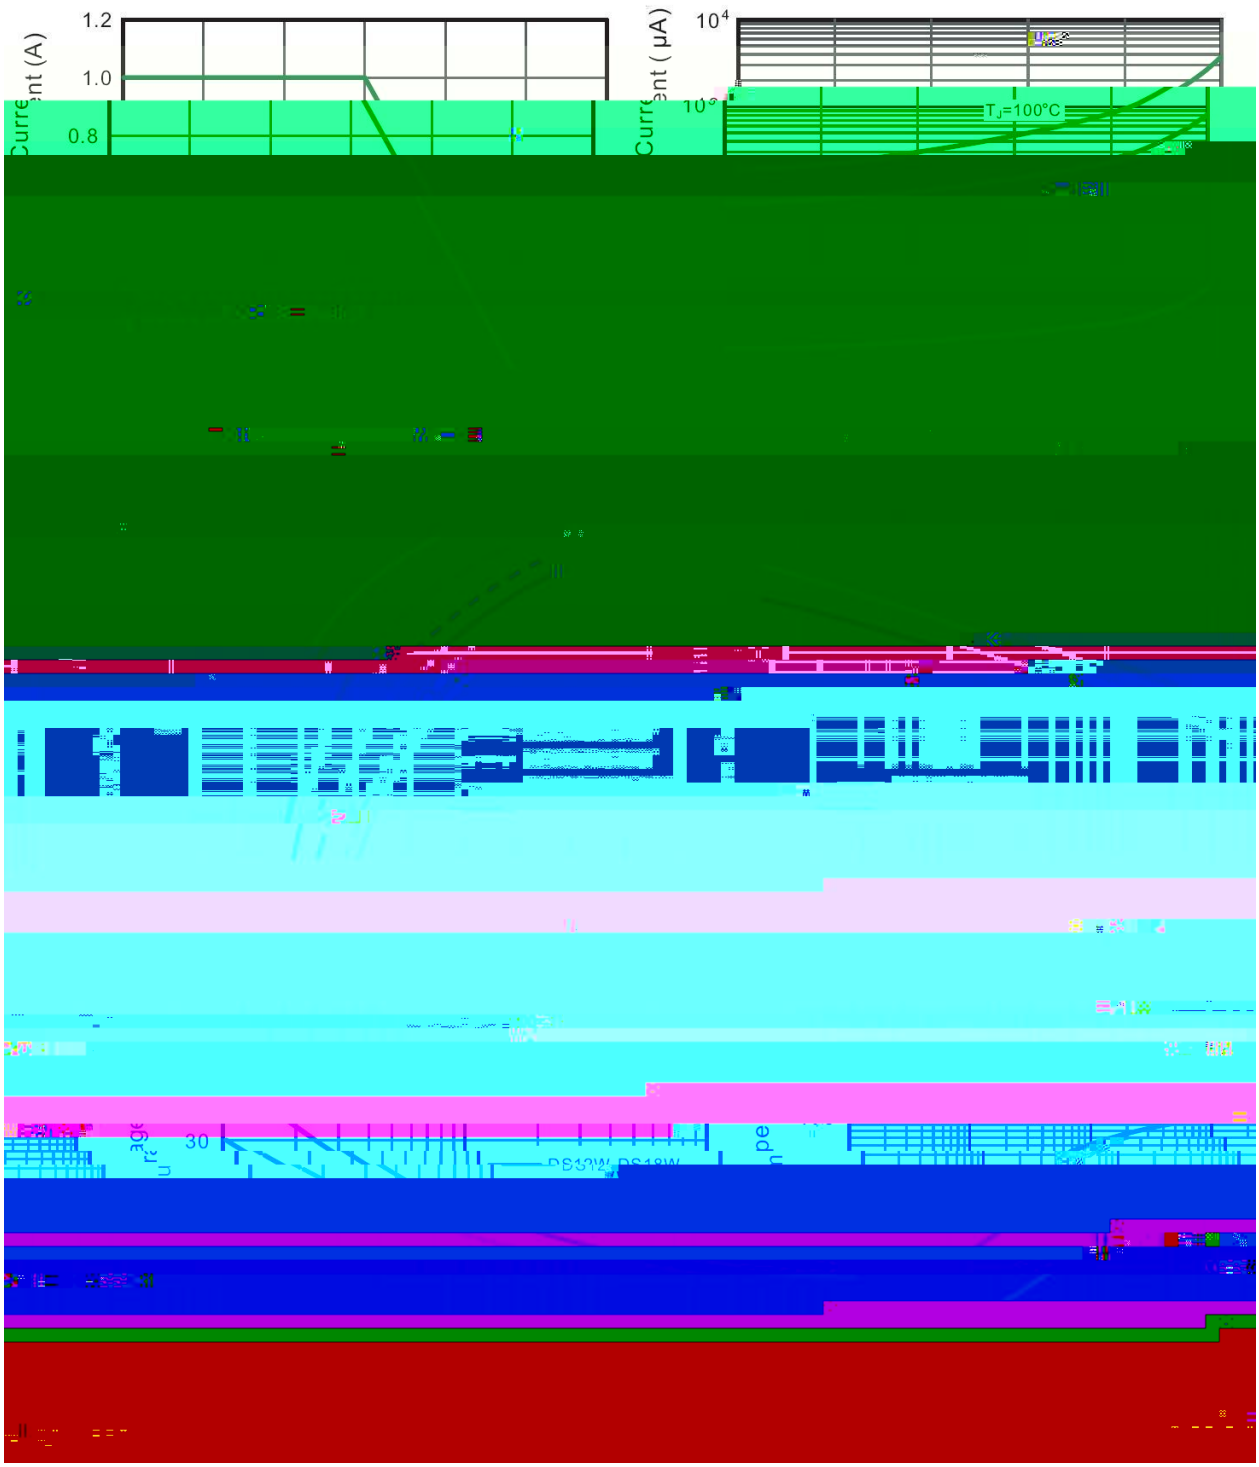

/ Package Dimensions

SOD-123FL

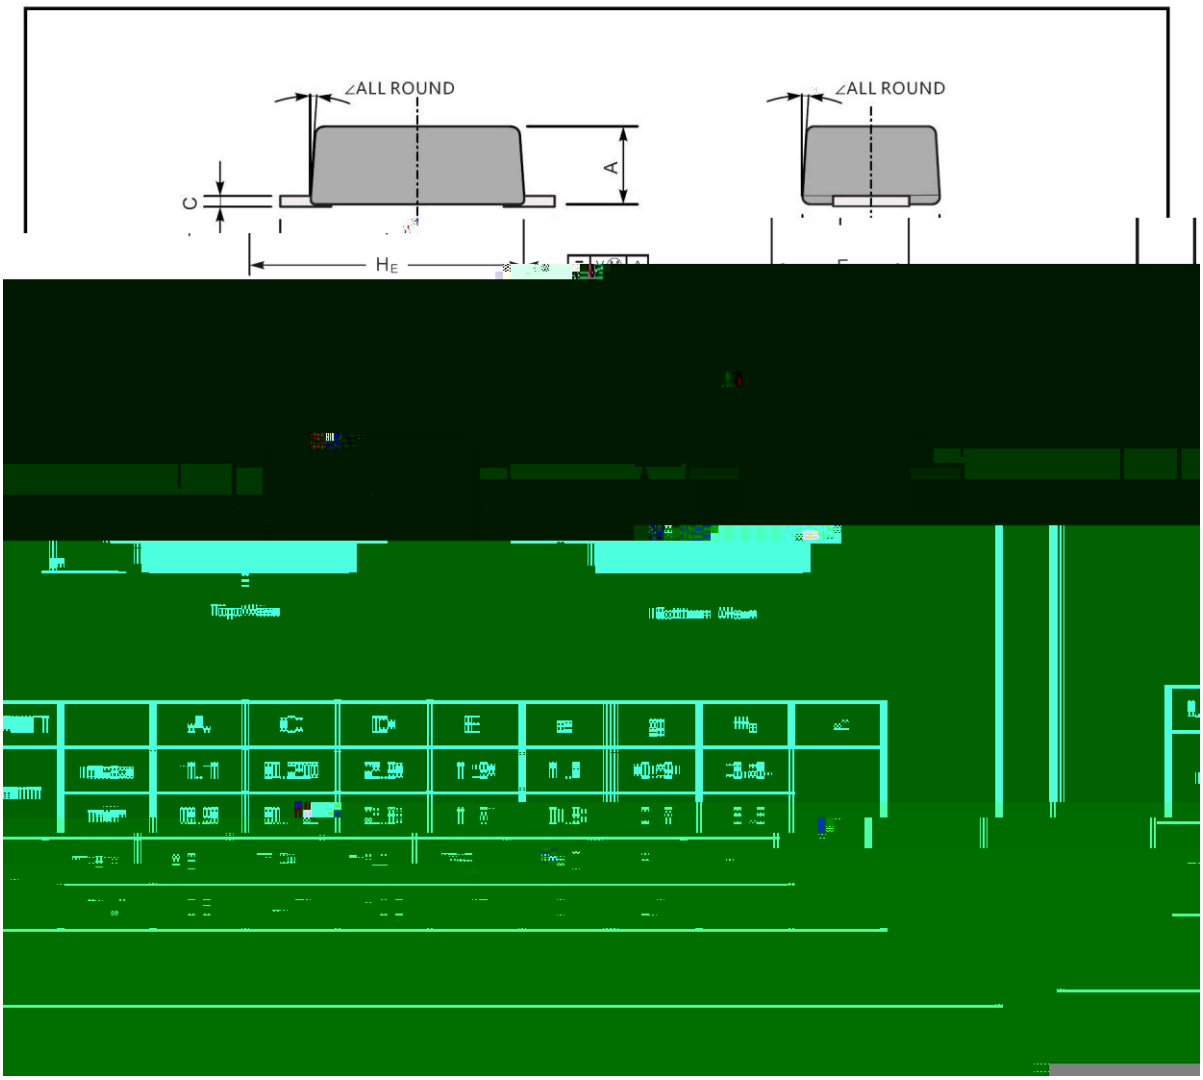


/ Marking Instructions

Marking

Type number	Marking code
DS12W	S12
DS14W	S14

/ Marking Instructions

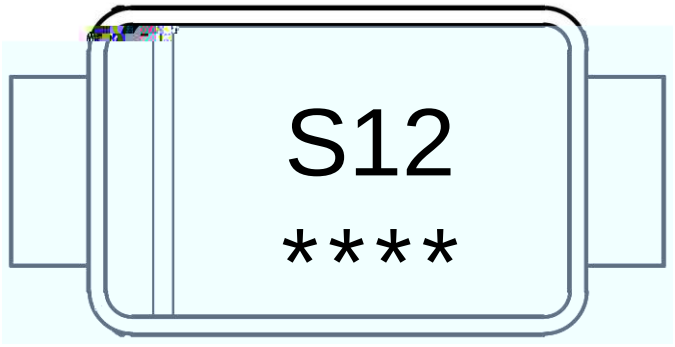

****y *ñ¼ *ñ/

Note:

Product Type Code

****y Lot No. Codek The 1st "*****" means:YM Codek The last 3 "*****" means:little Lot No Code

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)



ÿ			Note:
1oÆ½	25½150-kž	60½90sec;	1.Preheating:25~150- , Time:60~90sec.
2oÍQ	245r 5-kÆÒ	5r 0.5sec;	2.Peak Temp.:245r 5- , Duration:5r 0.5sec.
3oÞNÙ,†	2½10- /sec.		3. Cooling Speed: 2~10- /sec.

/ Resistance to Soldering Heat Test Conditions

ÿ	260r 5-	ÿ	10r 1 sec.	Temp.:260r 5-	Time:10r 1 sec

/ Packaging SPEC.

2& x / REEL

Package Type