
00 2 0A SMA


Surface Mount Superfast Recovery Rectifier, Reverse Voltage:800V,Forward Current:2.0


Parameter	Symbol	Rating	Unit

0 8 9 = > ?

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

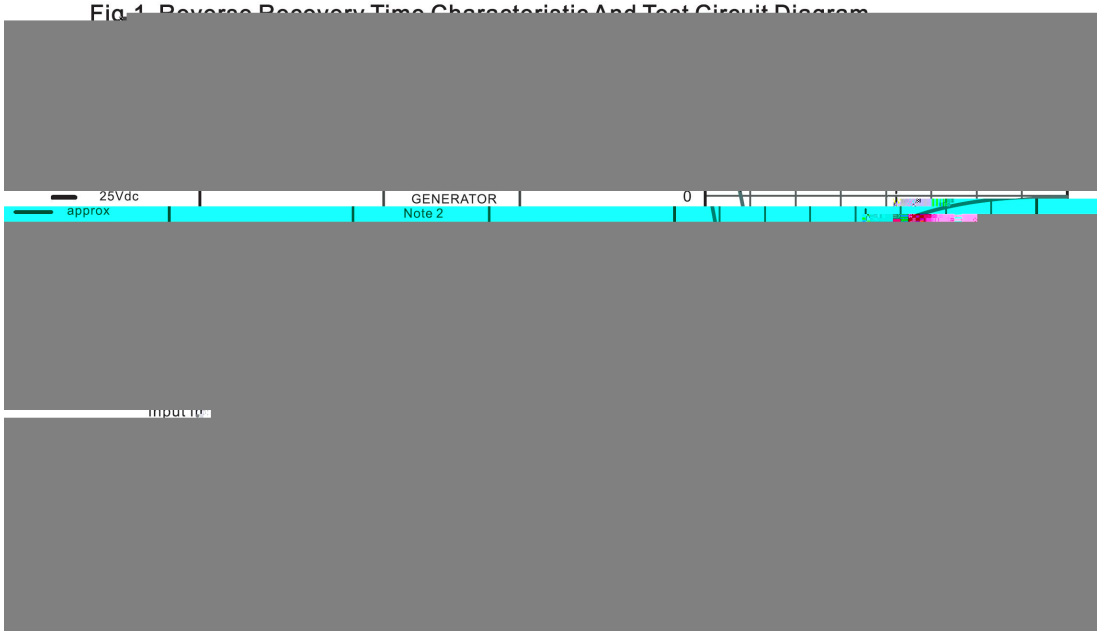


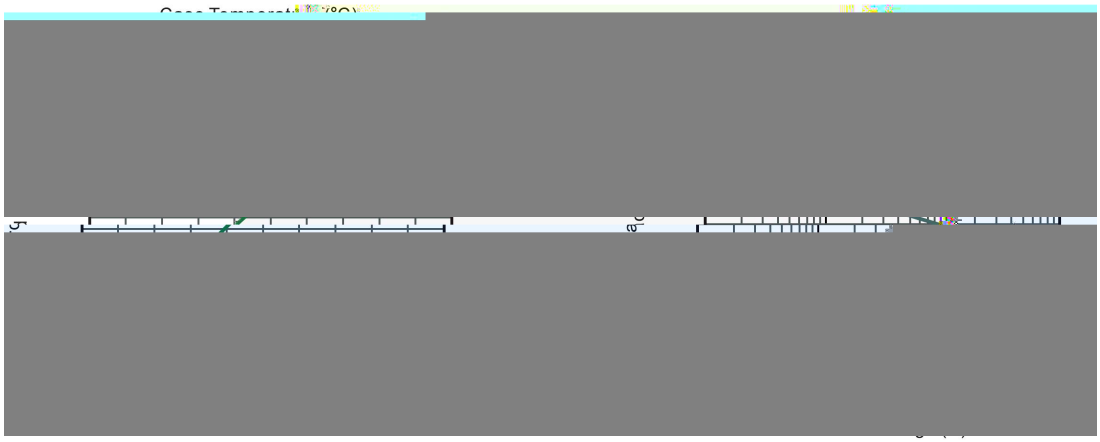


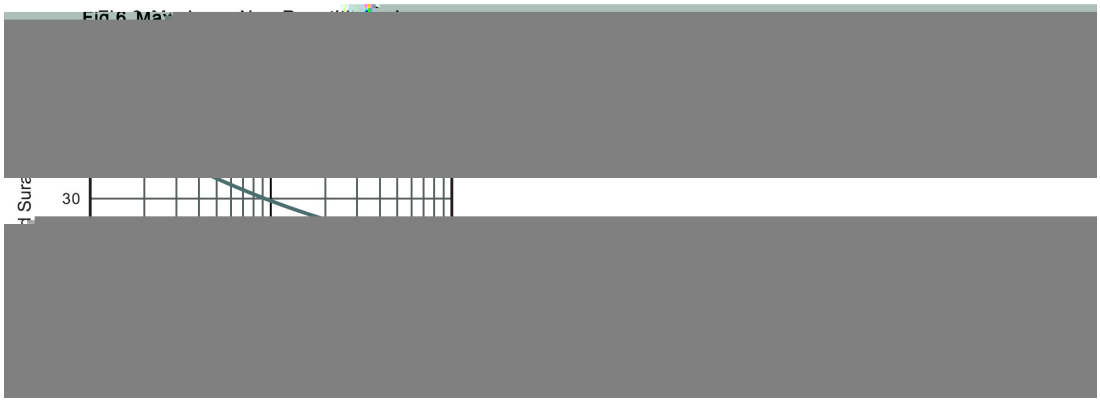

@A B C ?

SMA

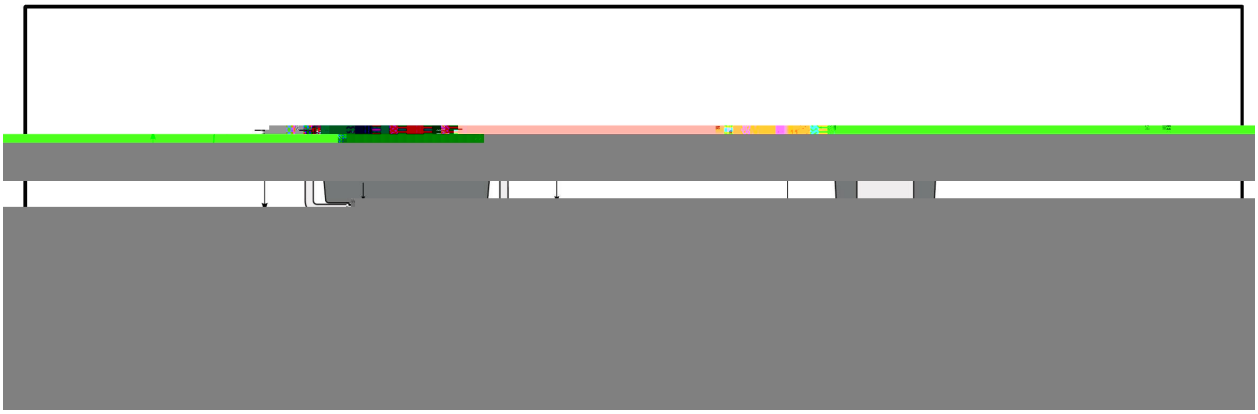


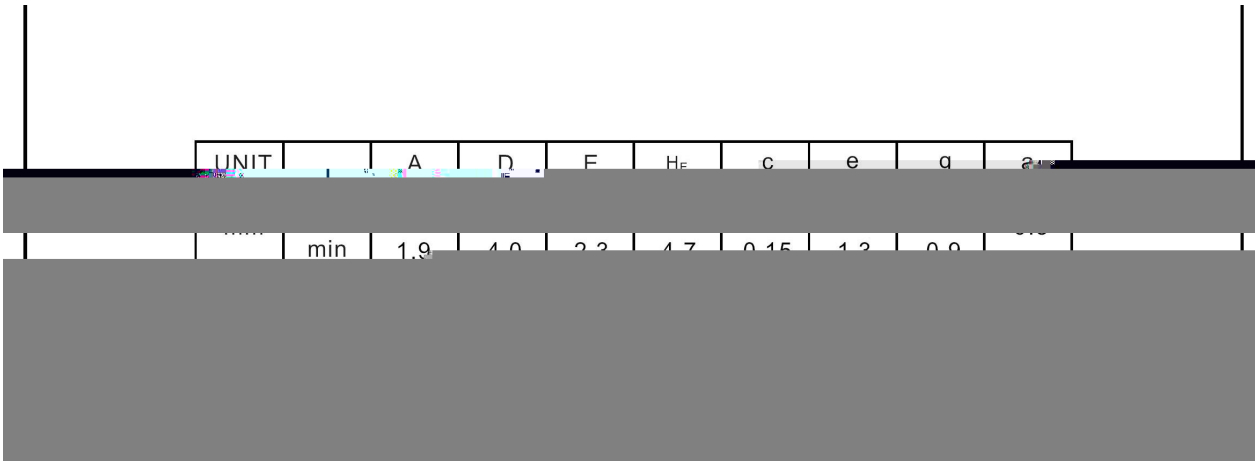

UNIT		A	D	E	H_E	c	e	g	$a_{max.}$
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	

Rev.A Mar.-2021

H I J K L = > ? M N OPQRPSTUVSPGWSXYZ[PGYXSG\]G]PY[X^G_X[`PSZabcWdefSPPg

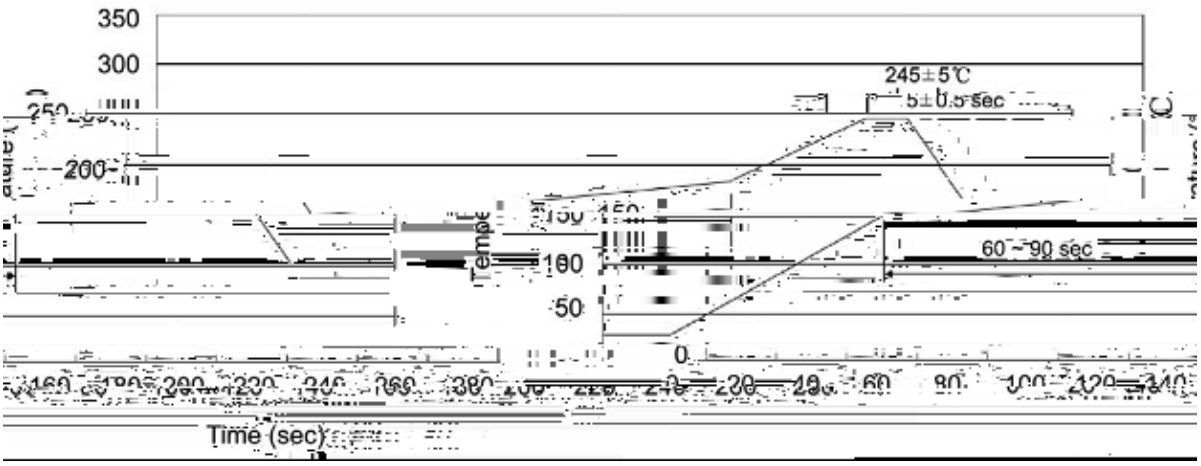

					Note:
1	150	180	60	90sec;	1.Preheating:150~180℃, Time:60~90sec.
2	245±5			5±0.5sec;	2.Peak Temp.:245±5℃, Duration:5±0.5sec.
3			2	10℃/sec.	3. Cooling Speed: 2~10℃/sec.

h J i j k l m n

M

260±5℃	10±1 sec.	Temp.:260±5℃	Time:10±1 sec

o p q r

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SMA	[redacted]						336X40	380X335X366