
! / Revised record

A	2017-12				
B	2021-2-18	7			


ES3AC~ES3JC

ES3AC

0 8 9 = > ? / Electrical Characteristic Curve

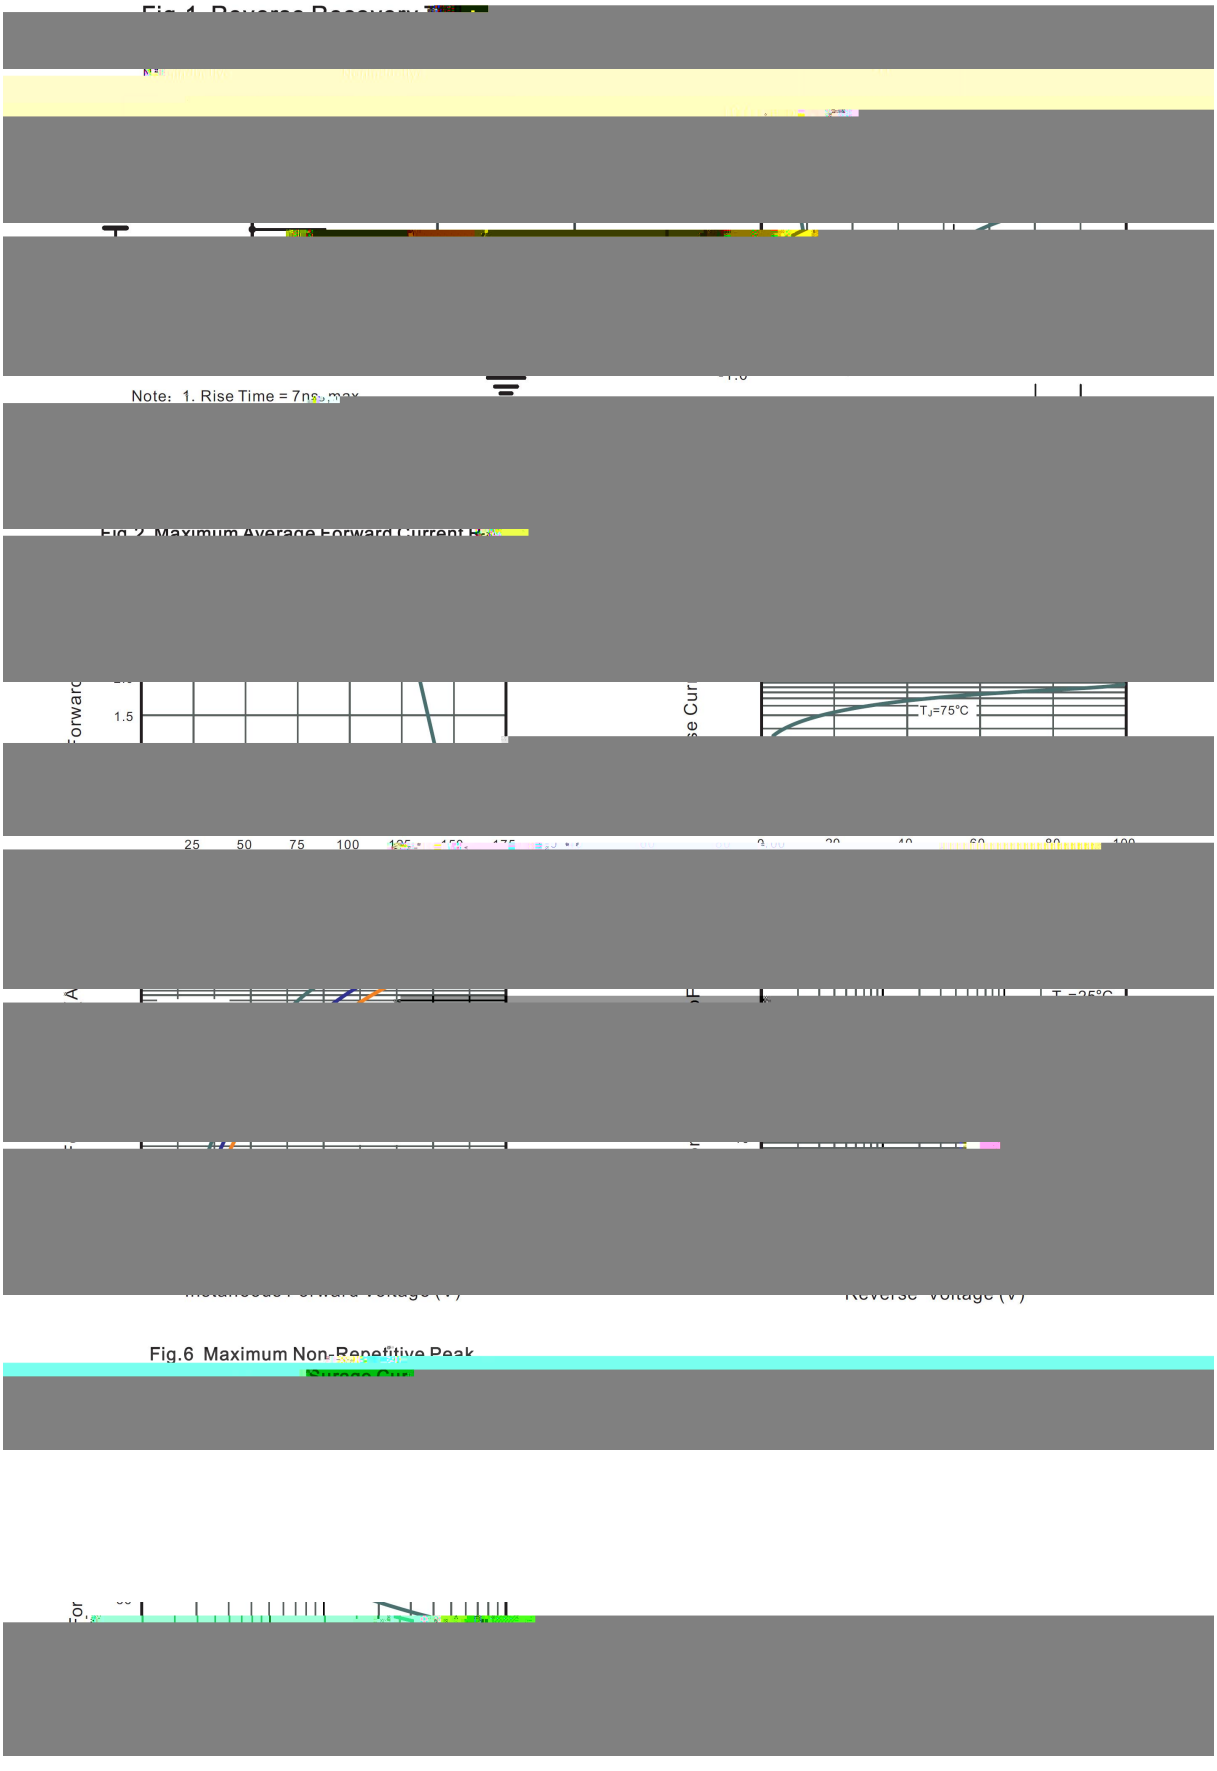


@ A B C ? / Package Dimensions

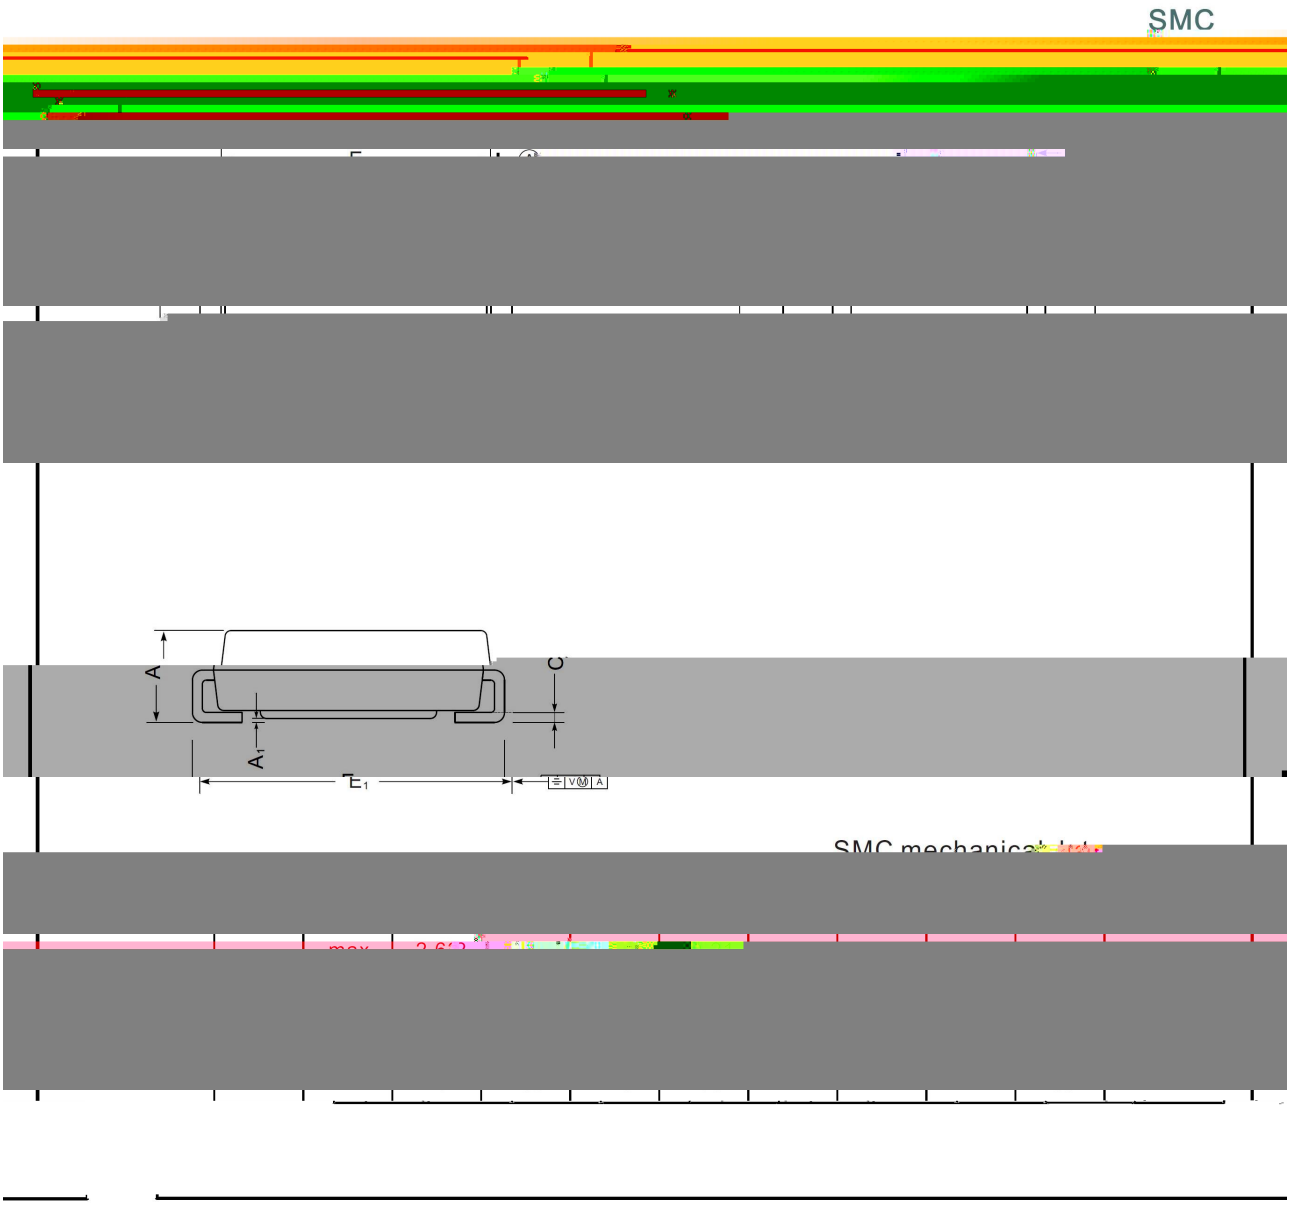

" # D E / Marking Instructions



" # D E / Marking Instructions

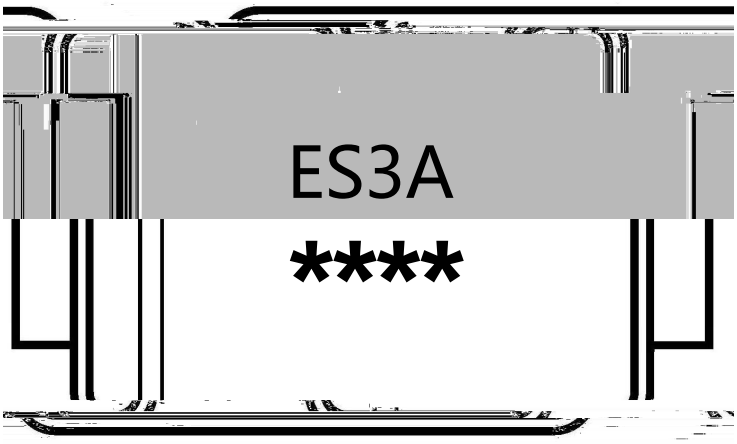

ES3A


**** 1 **F** 3 **F**

Note:

ES3A Product Type Code

**** Lot No. Code The 1st **F** means:YM Code The last 3 **F**means:little Lot No Code

H I J K L = > ? (M N) / OPQRPSTUVSPGWSXYZ[PGYXSG\]G]PY[X^G_X[`PSZabcWdefSPPg

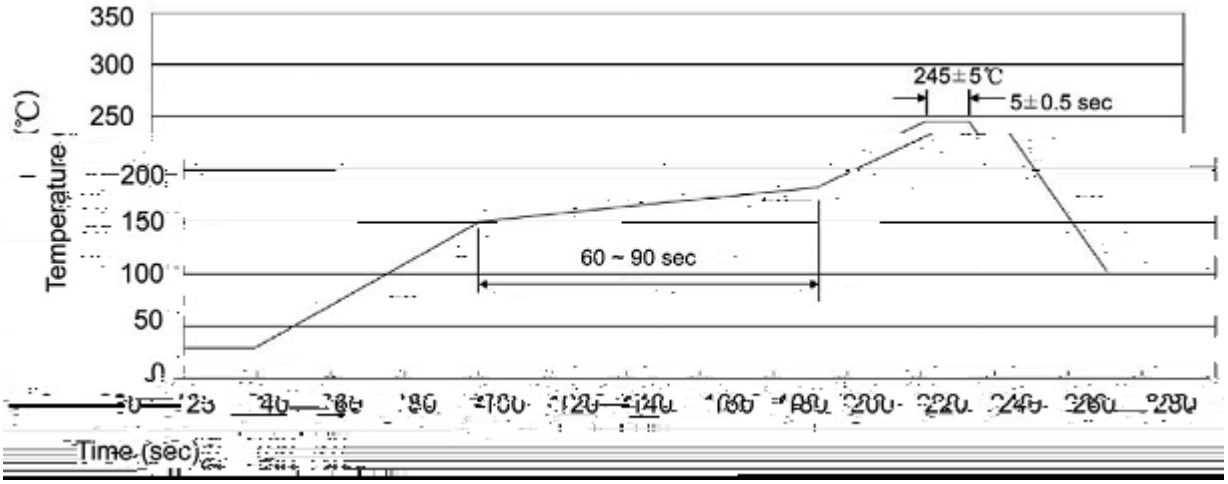

						Note:
1		25	150	60	90sec;	1.Preheating:25~150℃, Time:60~90sec.
2		245±5			5±0.5sec;	2.Peak Temp.:245±5℃, Duration:5±0.5sec.
3			2	10℃/sec.		3. Cooling Speed:

&

R ! A 1 R (! A 1 R