1.2A ABF

1.2A Surface Mount Glass Passivated Bridge Rectifier, ABF thin package.

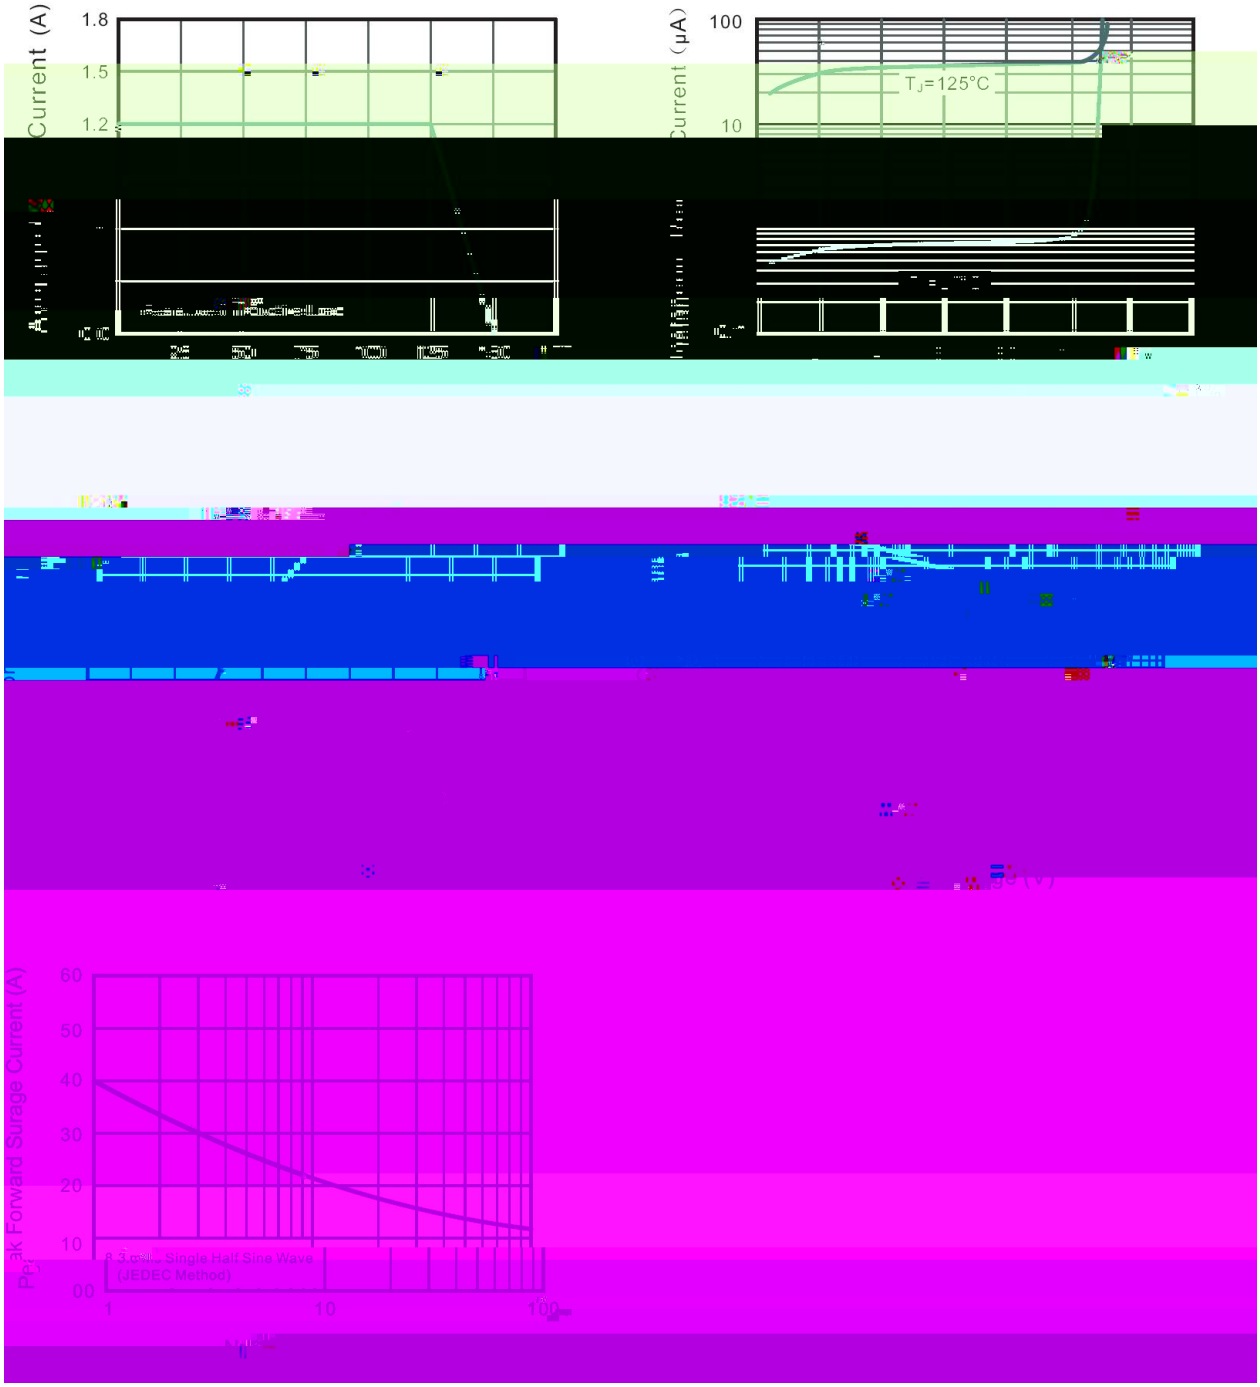
1000V 1.2A

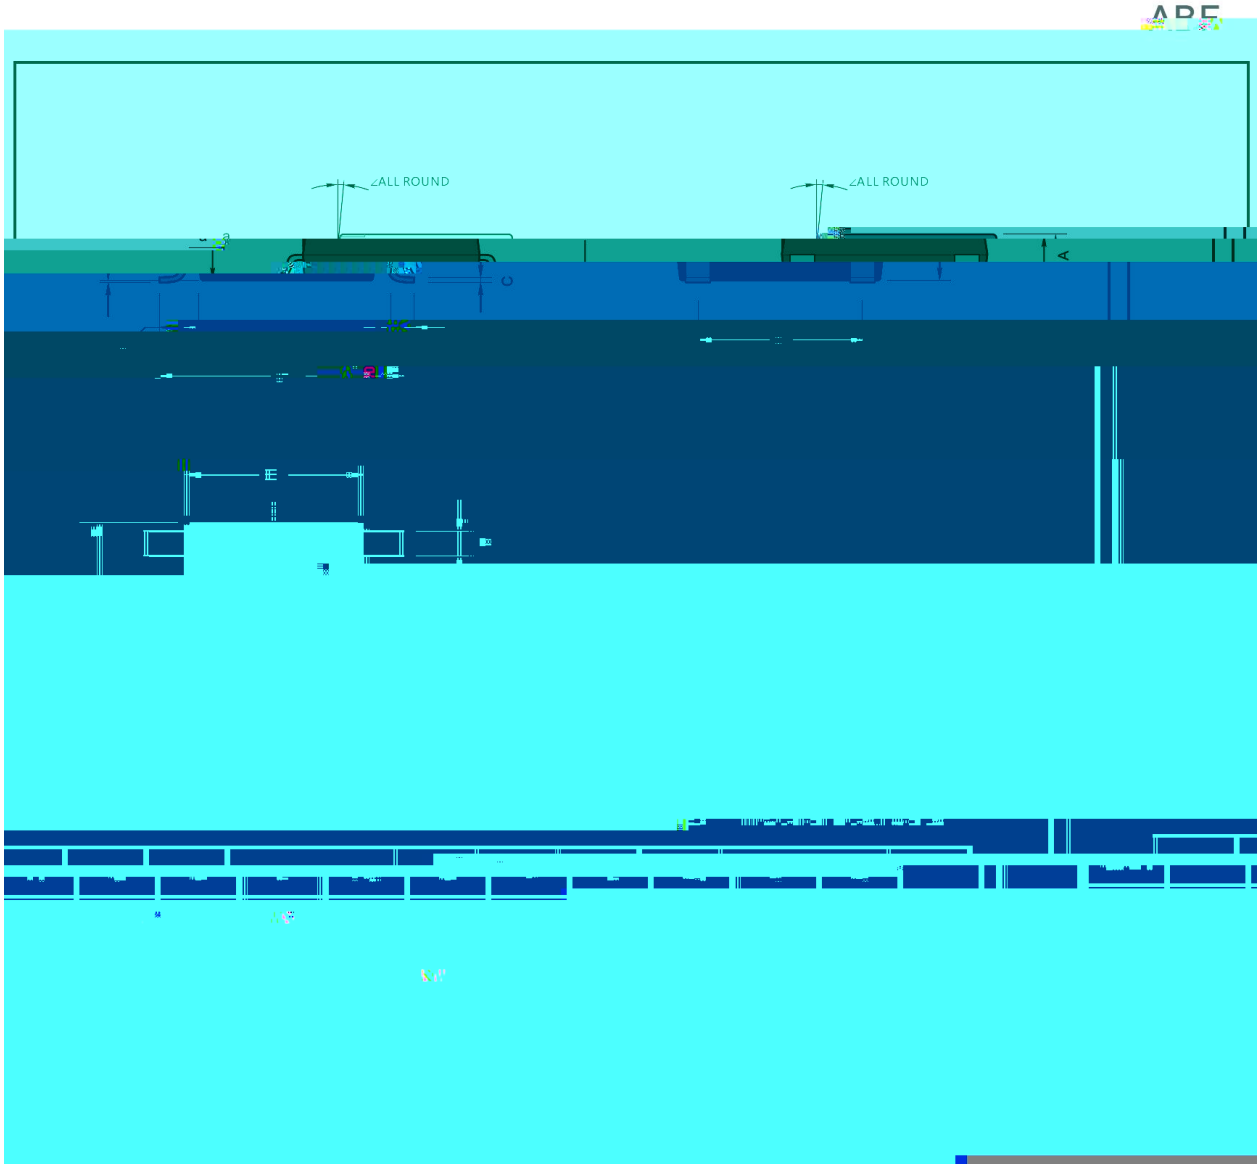
Glass Passivated Chip Junction,Reverse Voltage: 1000V,Forward Current:1.2A, Fast reverse recovery time,Designed for Surface Mount Application.Halogen free product.

.

General purpose.


Rev.D May.-2017


Current (A)
1.8
1.5
1.2
Current (μA)
100
10
T_J=125°C
60
50
40
30
20
10
00
8.3ms Single Half Sine Wave
(JEDEC Method)
1
10
100


∠ALL ROUND
∠ALL ROUND

Marking

Type number	Marking code
FTB10F-12	F10F12



Temperature Profile for IR Reflow Soldering(Pb-Free)

