## "Yَ

2A ABS/LBF

2A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.

## ◕ È

100V~1000V 2.0A


Glass Passivated Chip Junction, Reverse Voltage :100 to 1000V,Forward Current: 2.0A, Fast reverse recovery time, Designed for Surface Mount Application. Halogen free product.

## ٭ ِ


.

General purpose.


## ภ ُ ๊ ≠ ɛ



## ã ﾉ ŭ




| PIN | DESCRIPTION |
|---|---|
| 1 | Input Pin ( ~ ) |
| 2 | Input Pin ( ~ ) |
| 3 | Output Anode ( + ) |
| 4 | Output Cathode ( - ) |

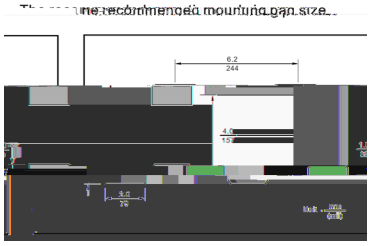


## ł. ʜ ɔ̀

See Marking Instructions.


| Parameter | Symbol | Rating | Unit 2 |
|---|---|---|---|

## ᵘ ĖÕĻ ʃ


ABS/LBF

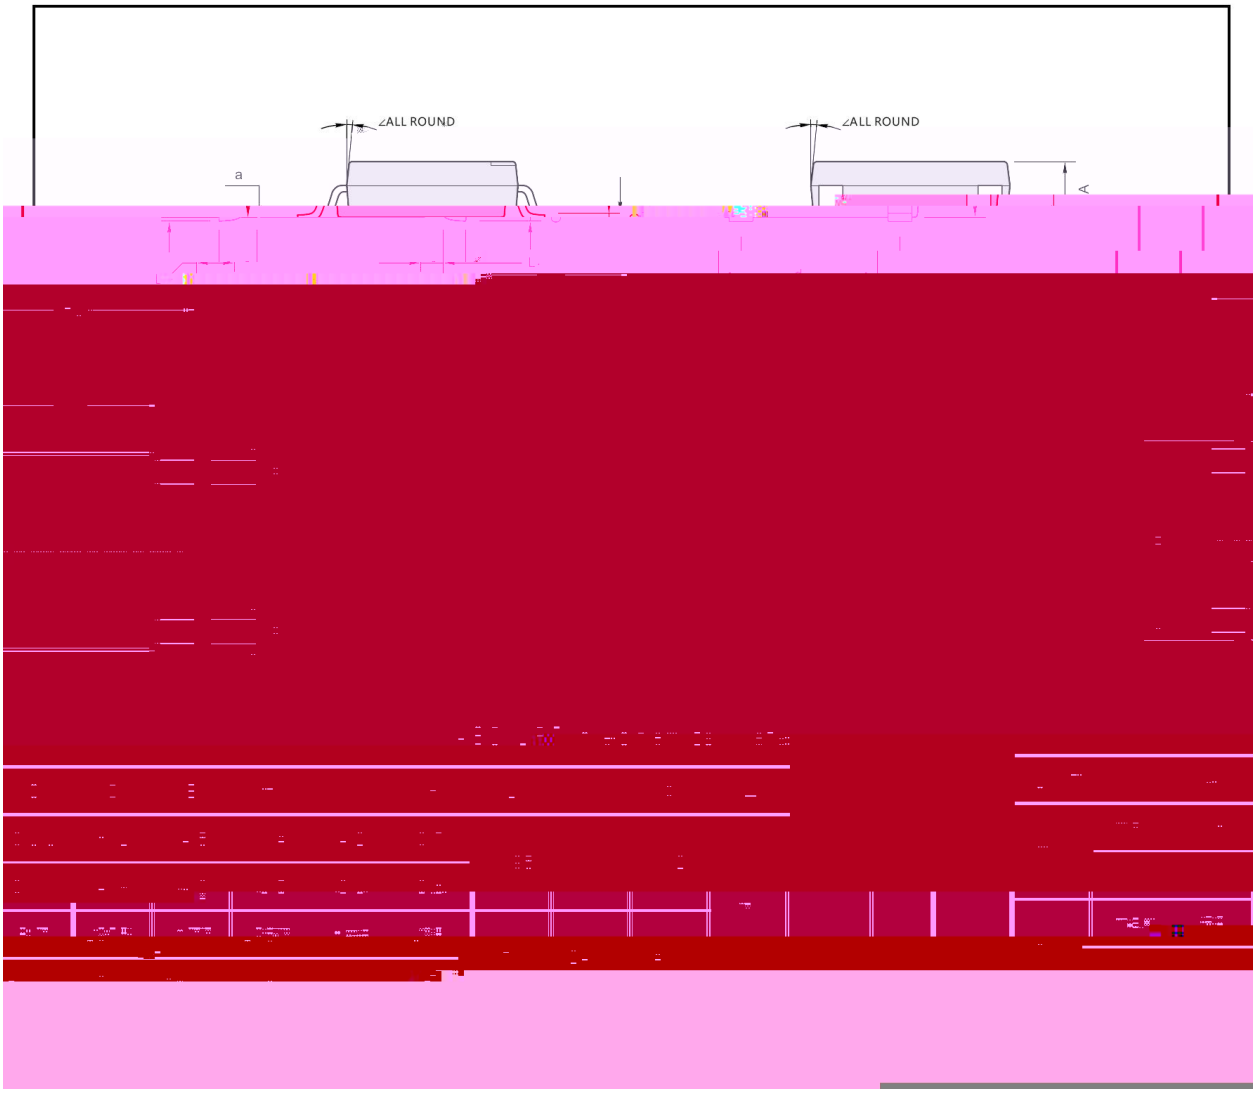

## Marking

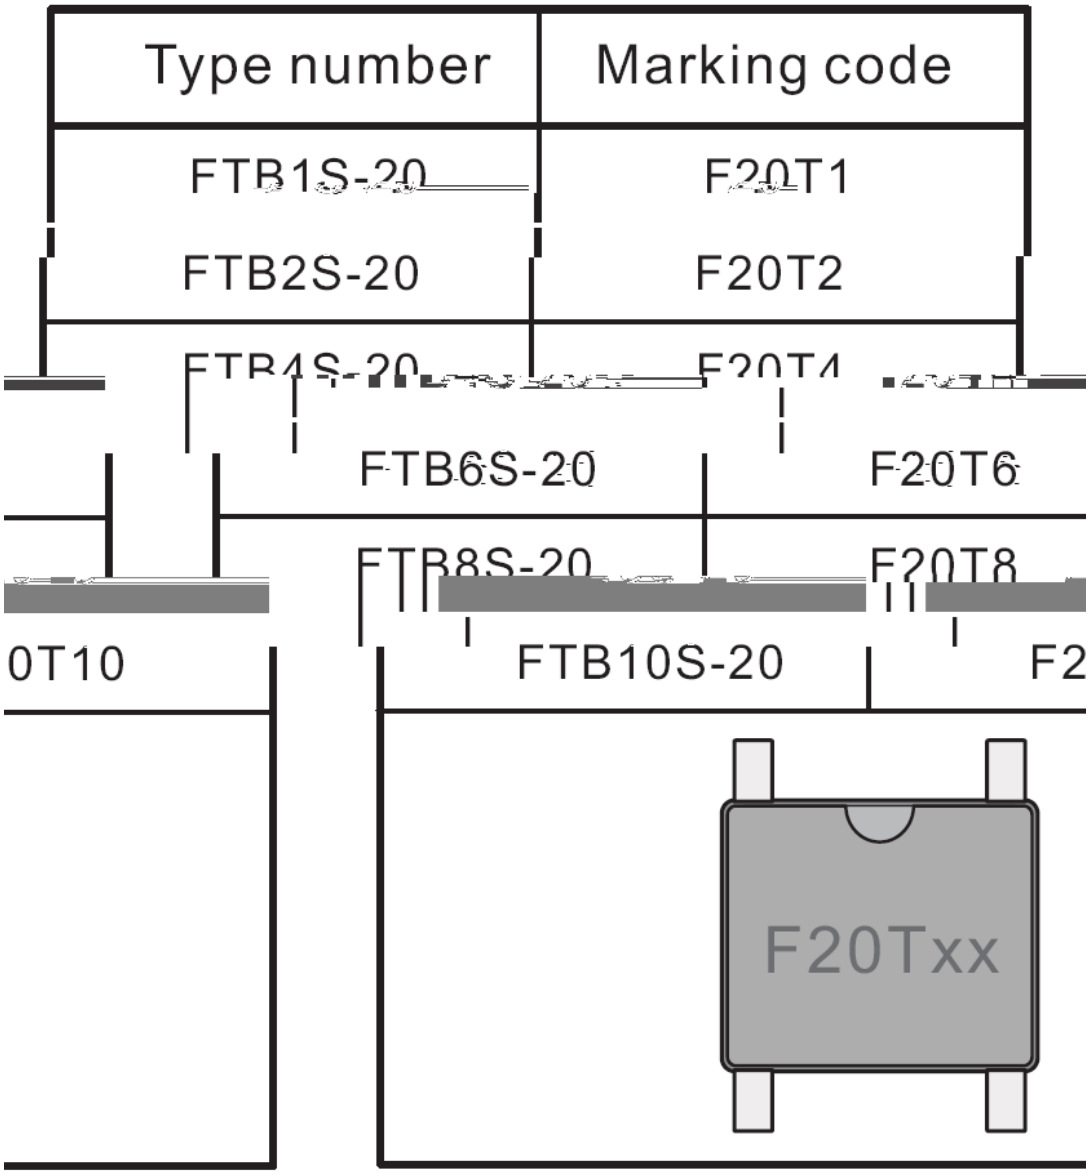
Type number
Marking code
FTB1S-20
F20T1
FTB2S-20
F20T2
FTB6S-20
F20T6
FTB8S-20
F20T8
0T10
FTB10S-20
F2
F20Txx

## ł. ļ Ω

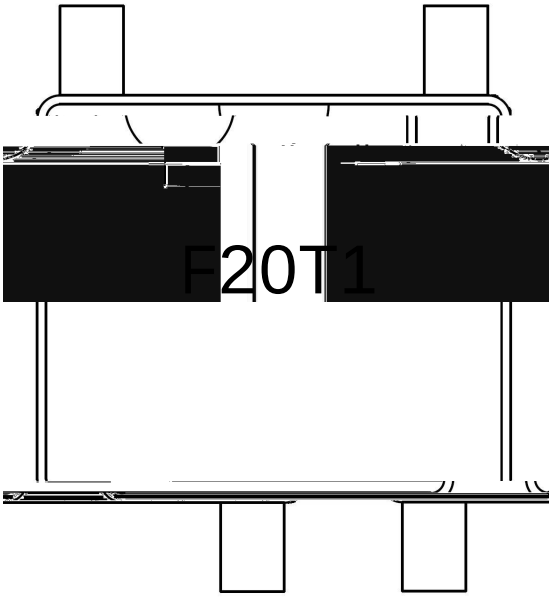


F20T1

**** 1 * 3 *

Note:

F20T1 Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code