Re e

50~1000V 20A GBJ

Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:20A,GBJ package.

PCB UL 94V-0


Ldeal for printed circuit bodrd,Case material molded plastic,The plastic material has U/L flammability classification 94V-0. Halogen free product.

.

General purpose.

GBJ Package Outline Dimensions



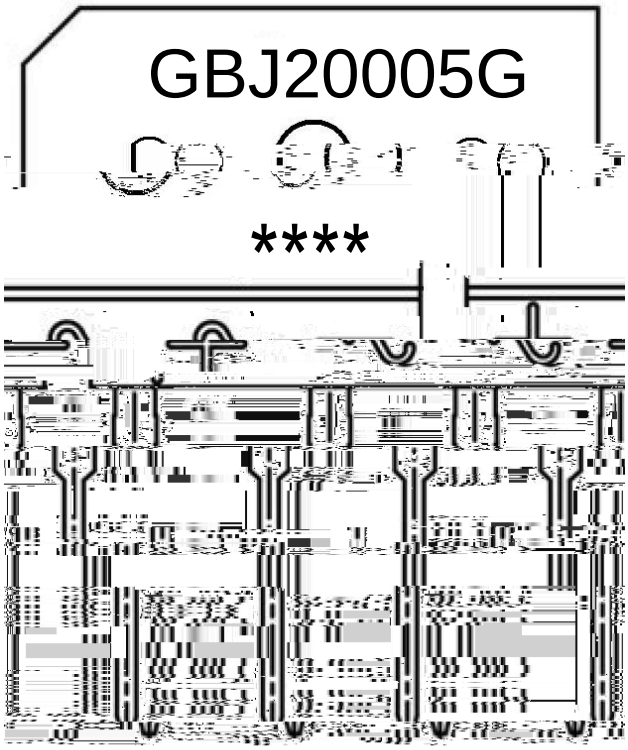


GBJ20005G

****

Note:

GBJ20005G:	Product Type.
****:	Lot No. Code, code change with Lot No.

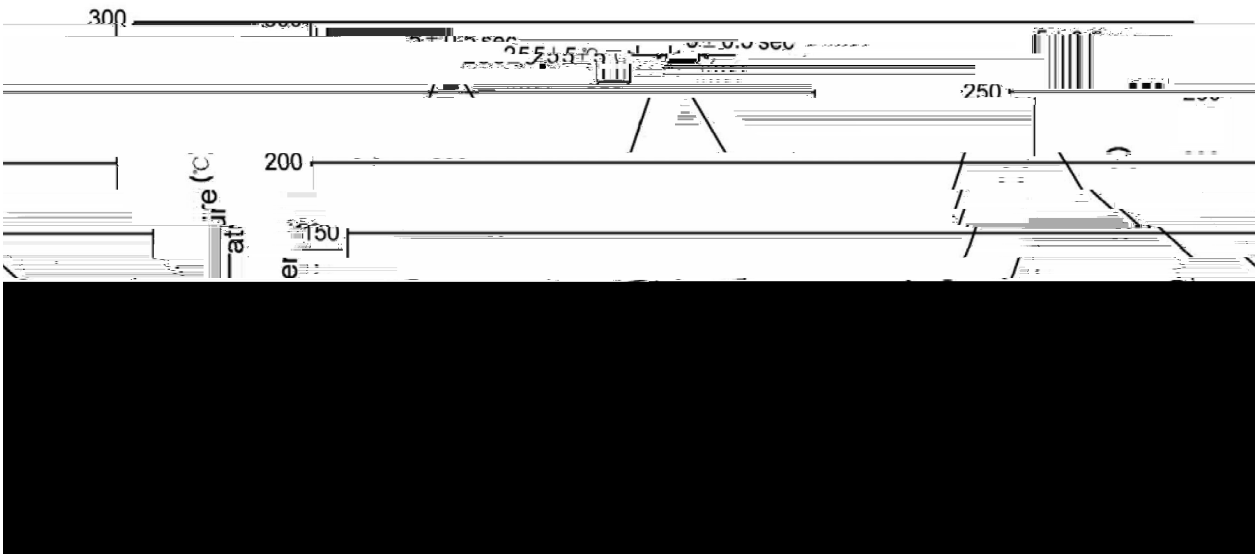

		Note:	
1	25 150 60 90sec;	1.Preheating:25~150 , Time:60~90sec.	
2	255±5 5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.	
3	2 10 /sec.	3. Cooling Speed: 2~10 /sec.	

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag 袋	Inner Box 盒	Outer Box 箱
GBJ	-	-						

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube 套管	Inner Box 盒	Outer Box 箱
GBJ	/	/	200	10	2000	/	306*108*42mm	322*246*252mm