

50~1000V 15.0A GBU



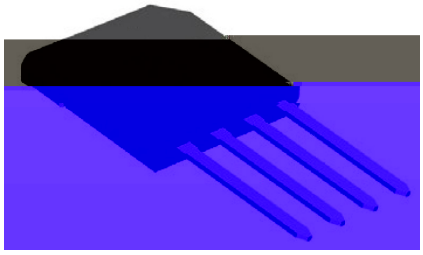

/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

	θ								


/ Electrical Characteristics(Ta=25)

				μ

/ Electrical Characteristic Curve


FIG.1-FORWARD CURRENT DERATING CURVE

FIG.2-MAXIMUM FOWARD SURGE CURRENT

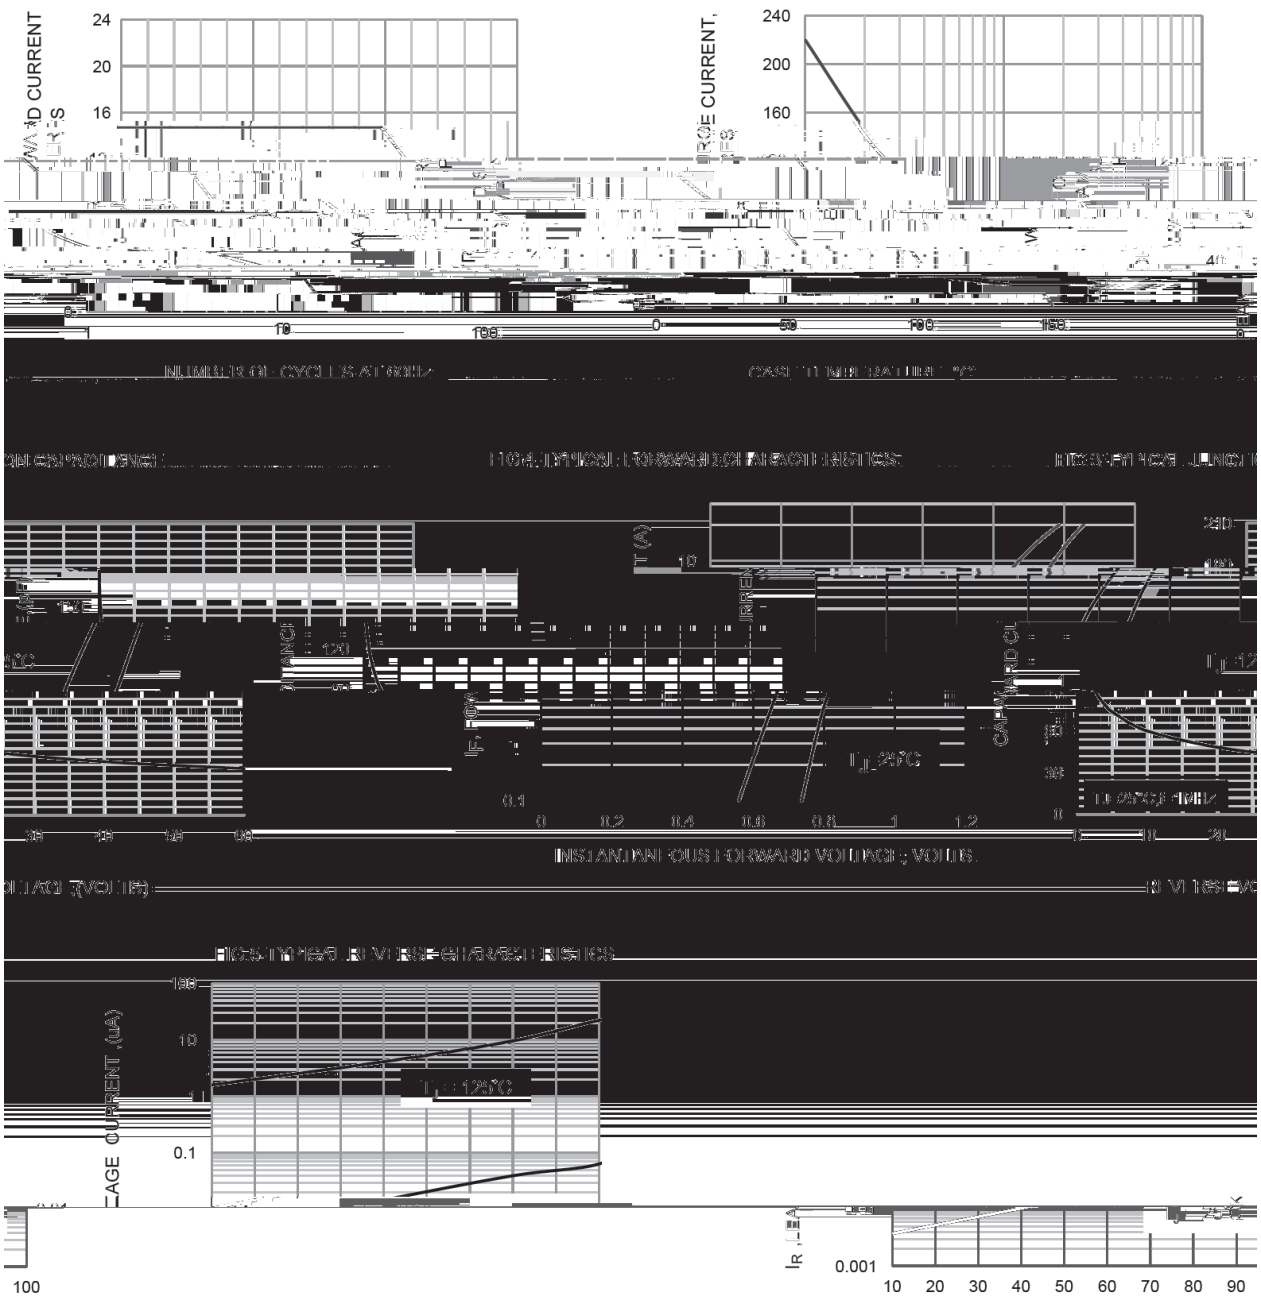


/ Package Dimensions

GBU Package Outline Dimensions

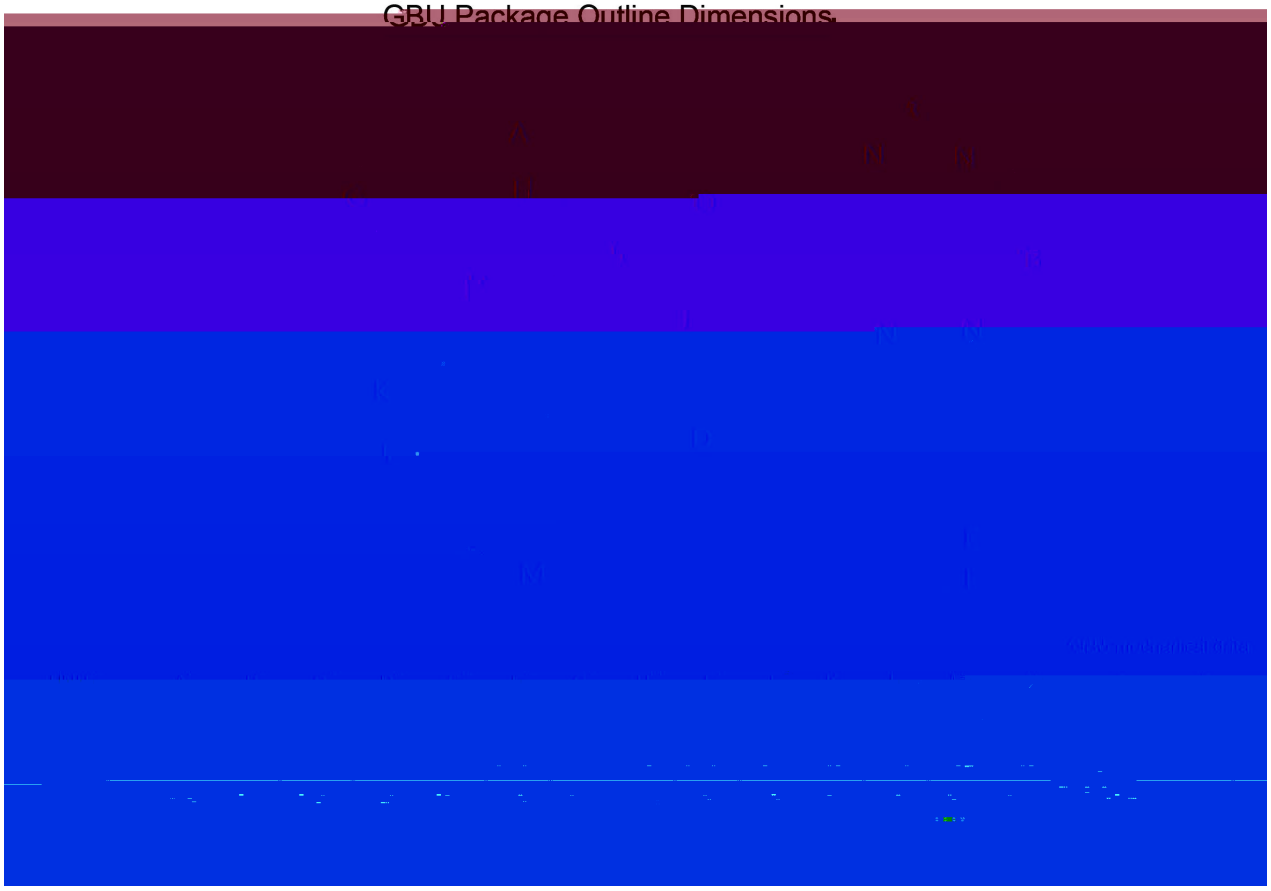

/ Marking Instructions

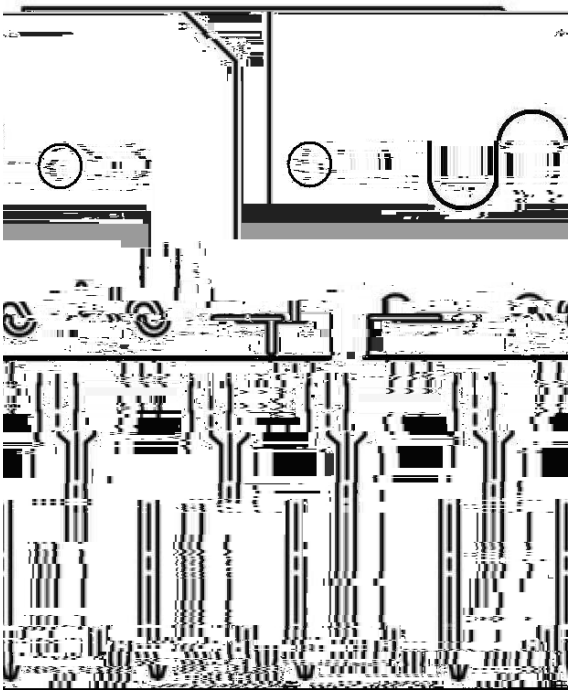


GBU15005

****

Note:

( ) / Temperature Profile for Dip Soldering(Pb-Free)

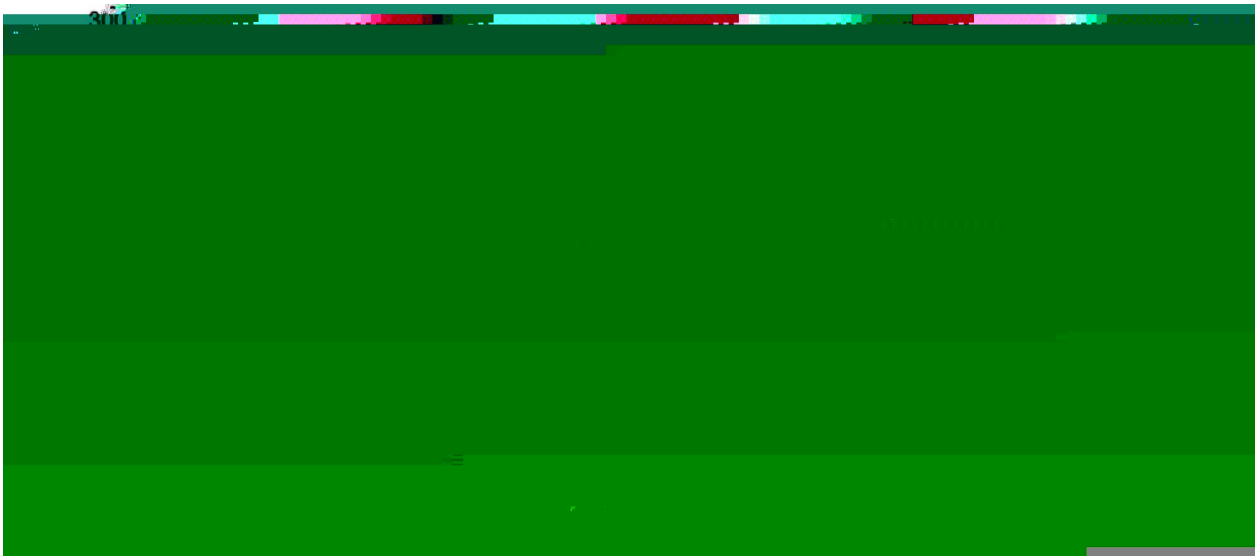

± ± ± ±