KTA1273T

Rev.E Mar.-2016

DATA SHEET

SOT-89 PNP



Parameter	Symbol	Rating	Unit
Collector to Base Voltage			

Electrical Characteristic Curve

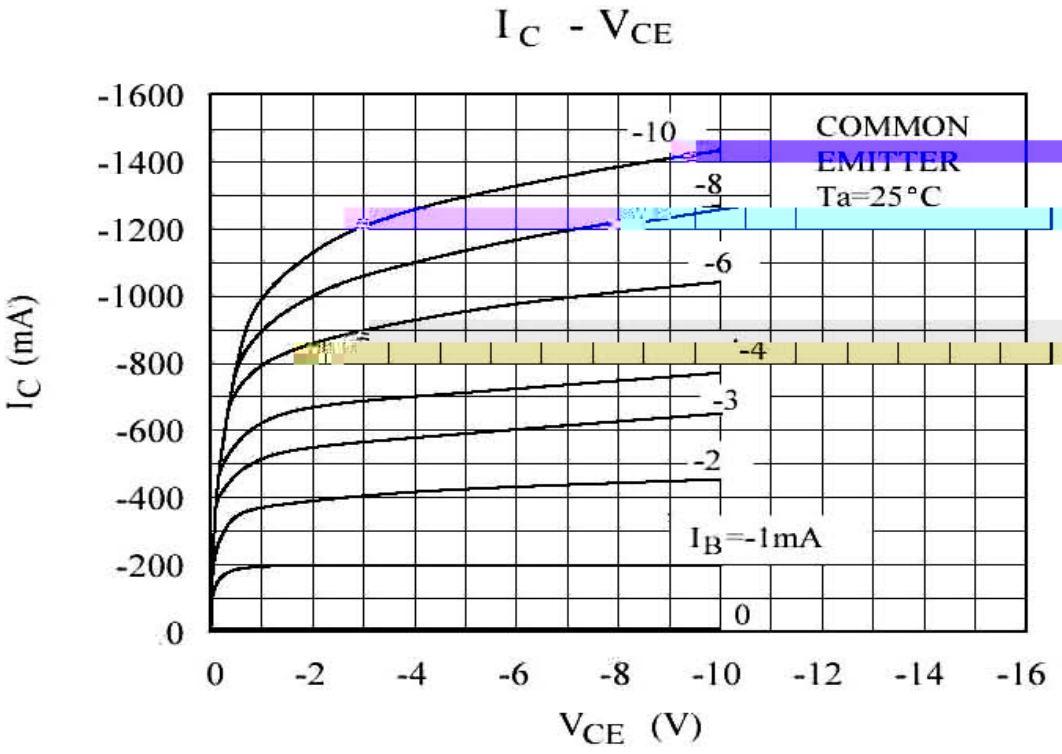

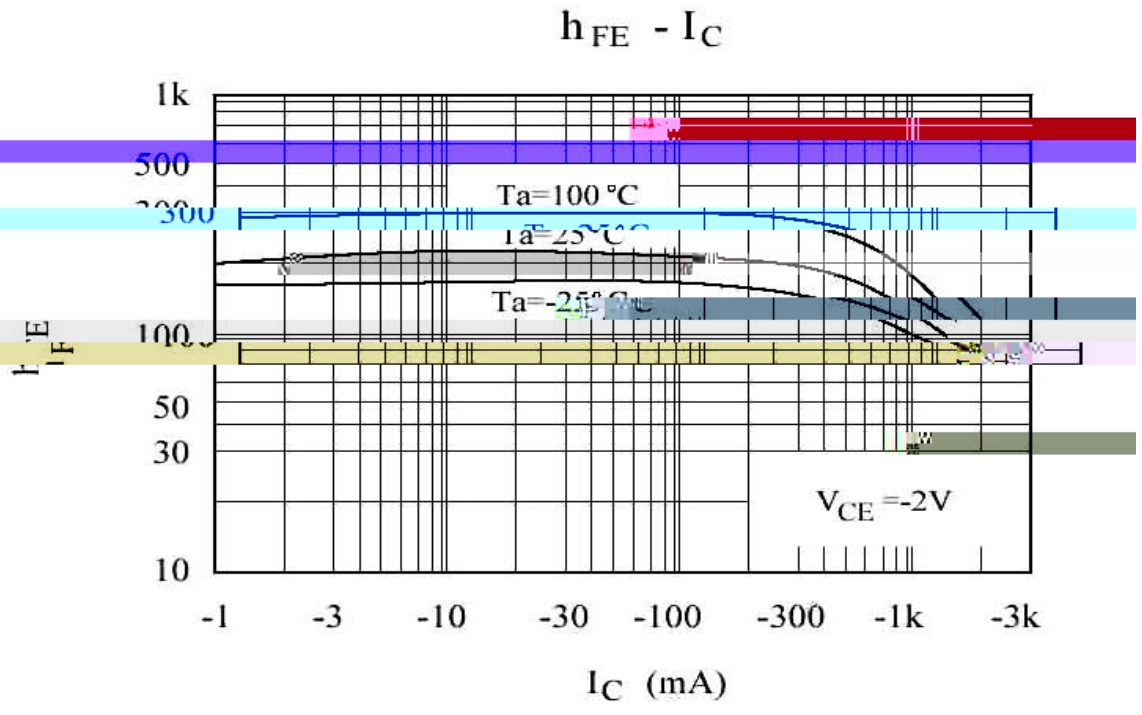

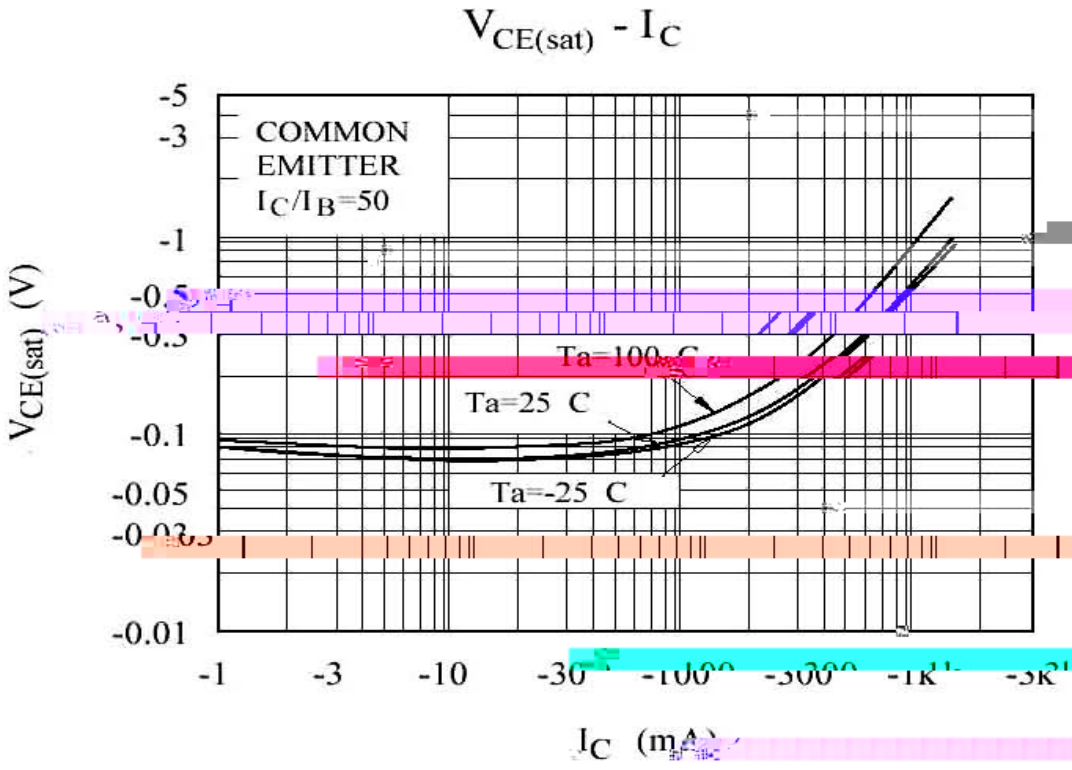

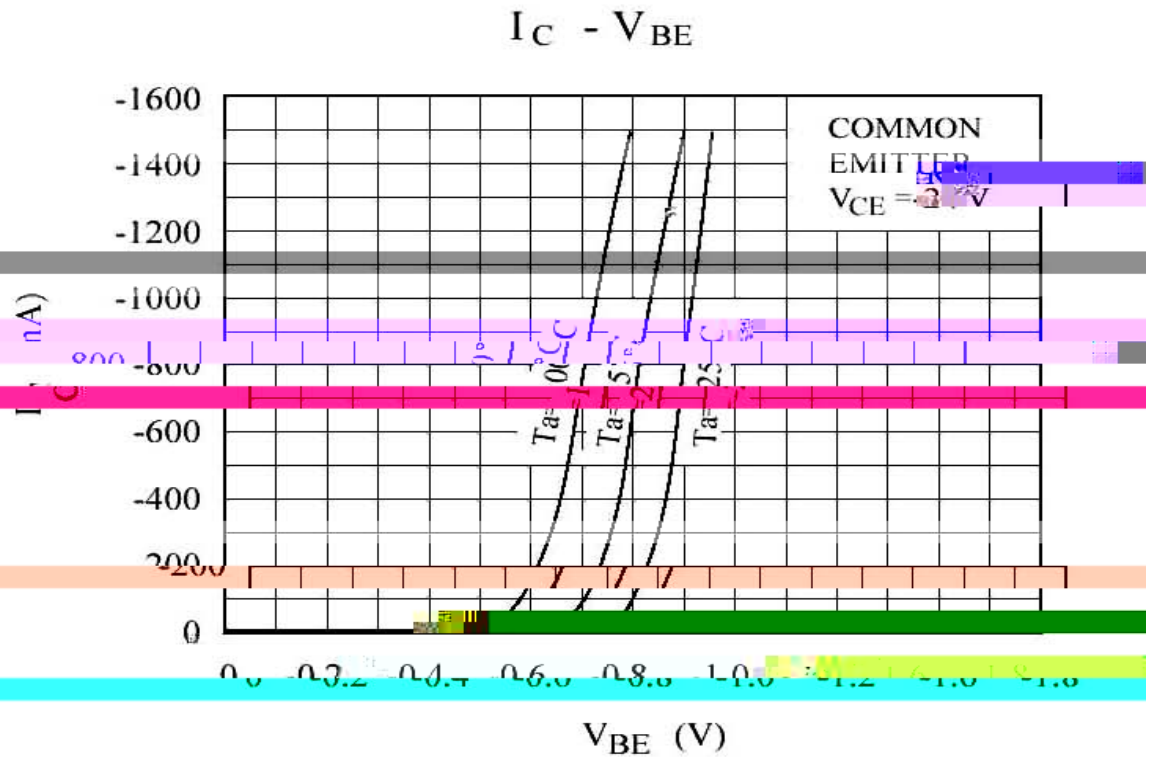

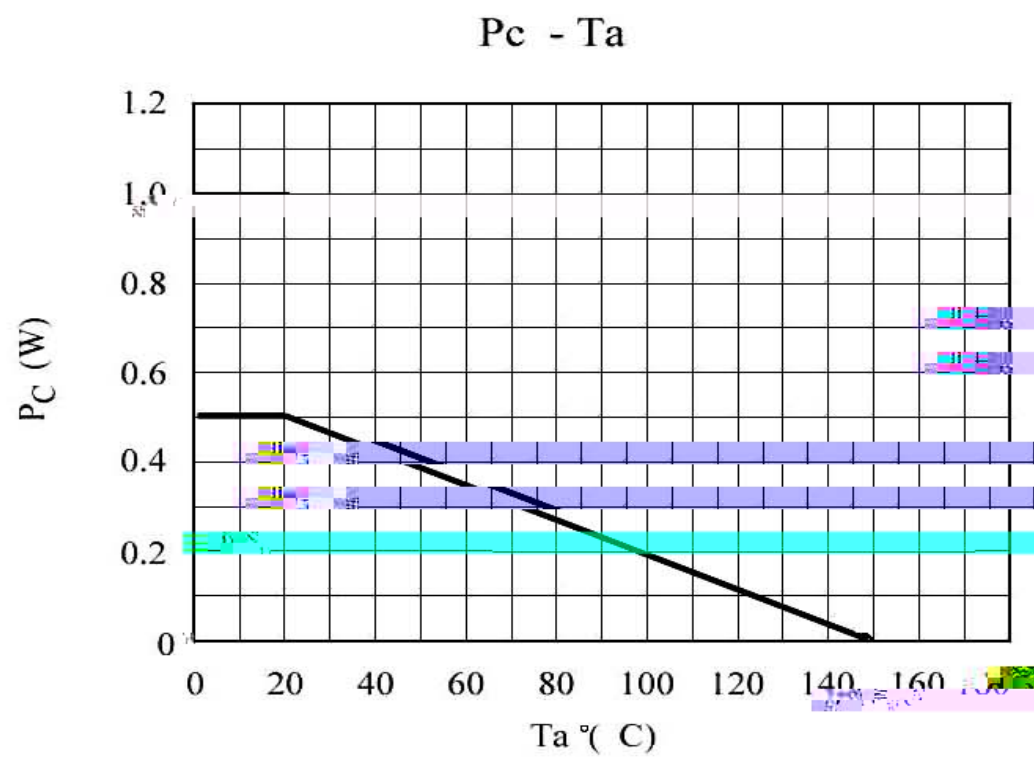

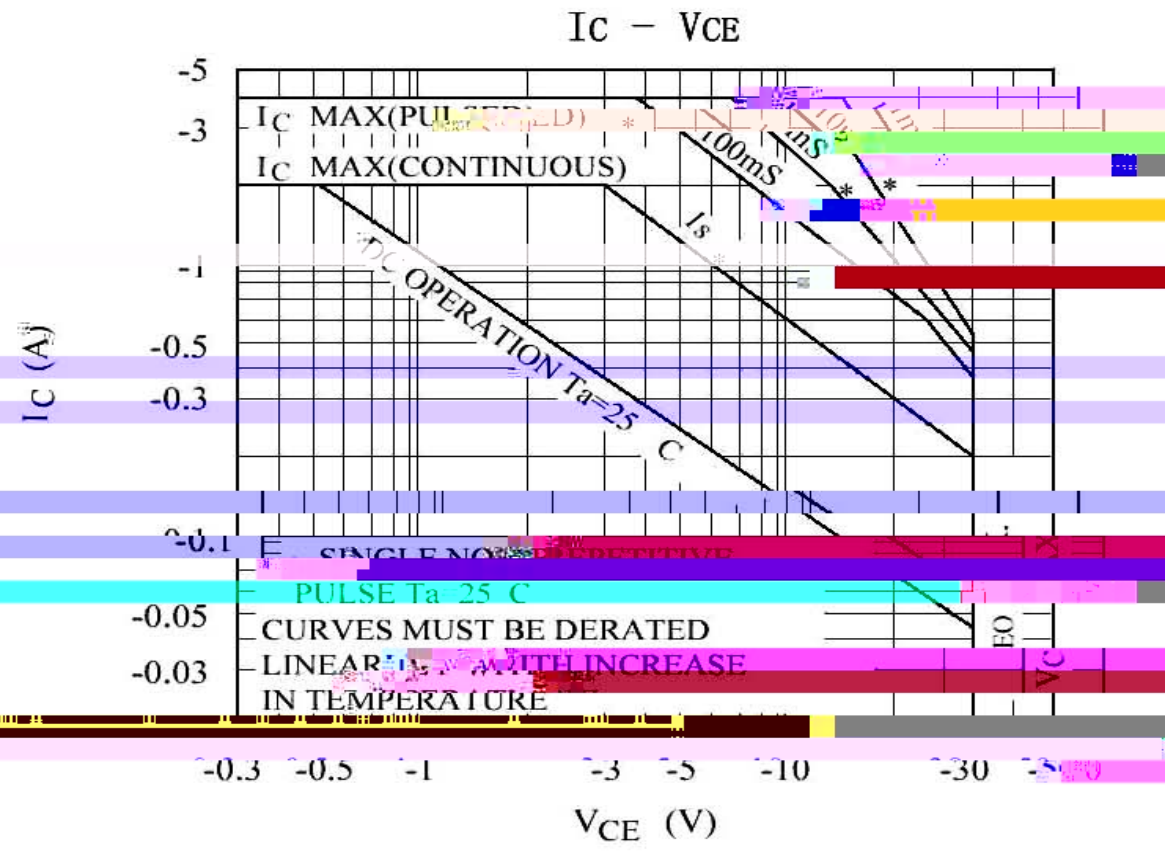

ł. L̋Ω / Marking Instructions

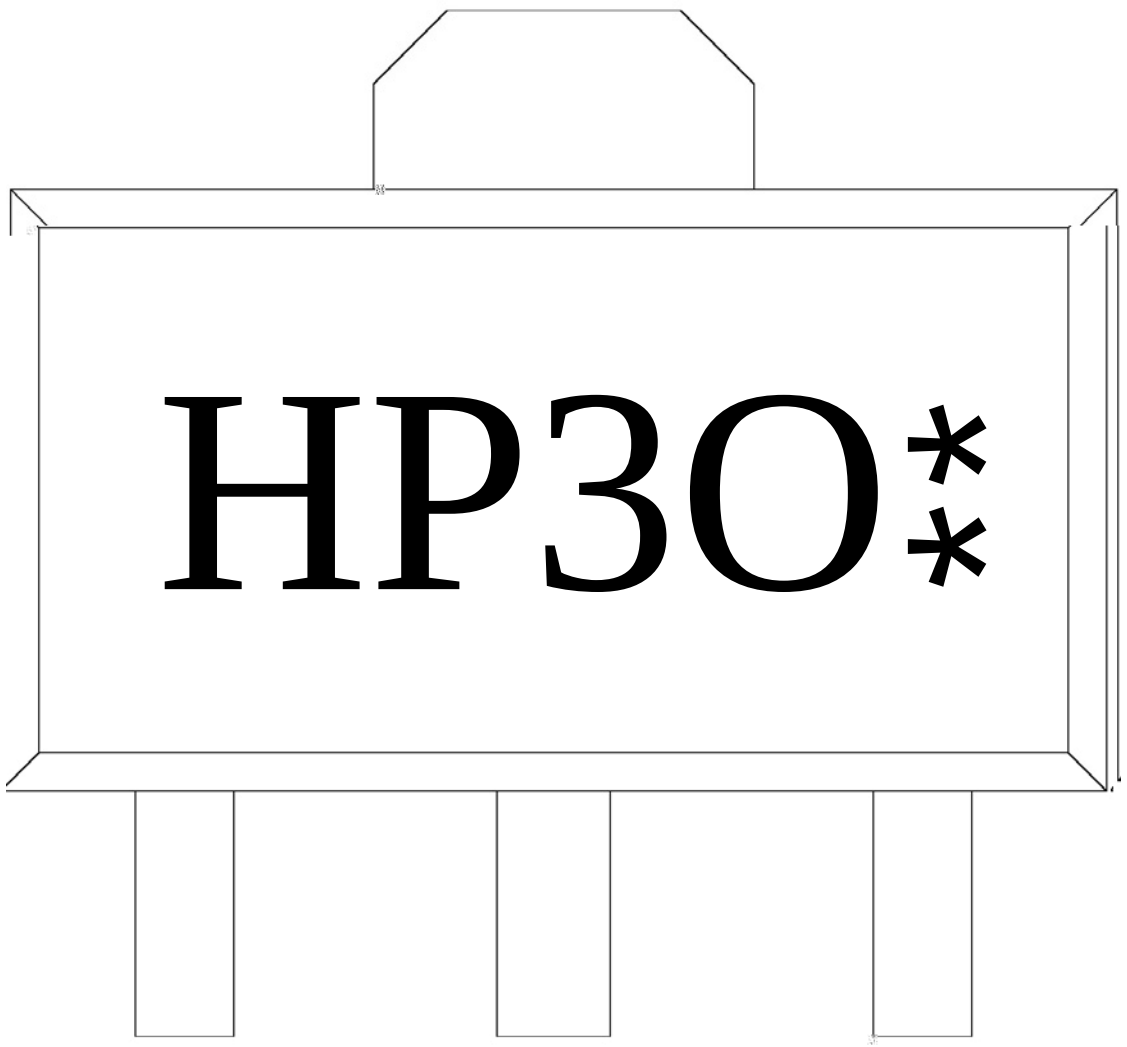

H

P3

O h_{FE}

**

Note:

H:	Company Code.
P3:	Product Type.
O	h_{FE} Classifications Symbol
**:	Lot No. Code, code change with Lot No.

ŧħ ʃ ╗ ẘΈ⋈ ƒ(ῼ ى) / Whpshudwxuh Suriloh iru LU Uhiorz Vroghulqj+Se0Iuhh,

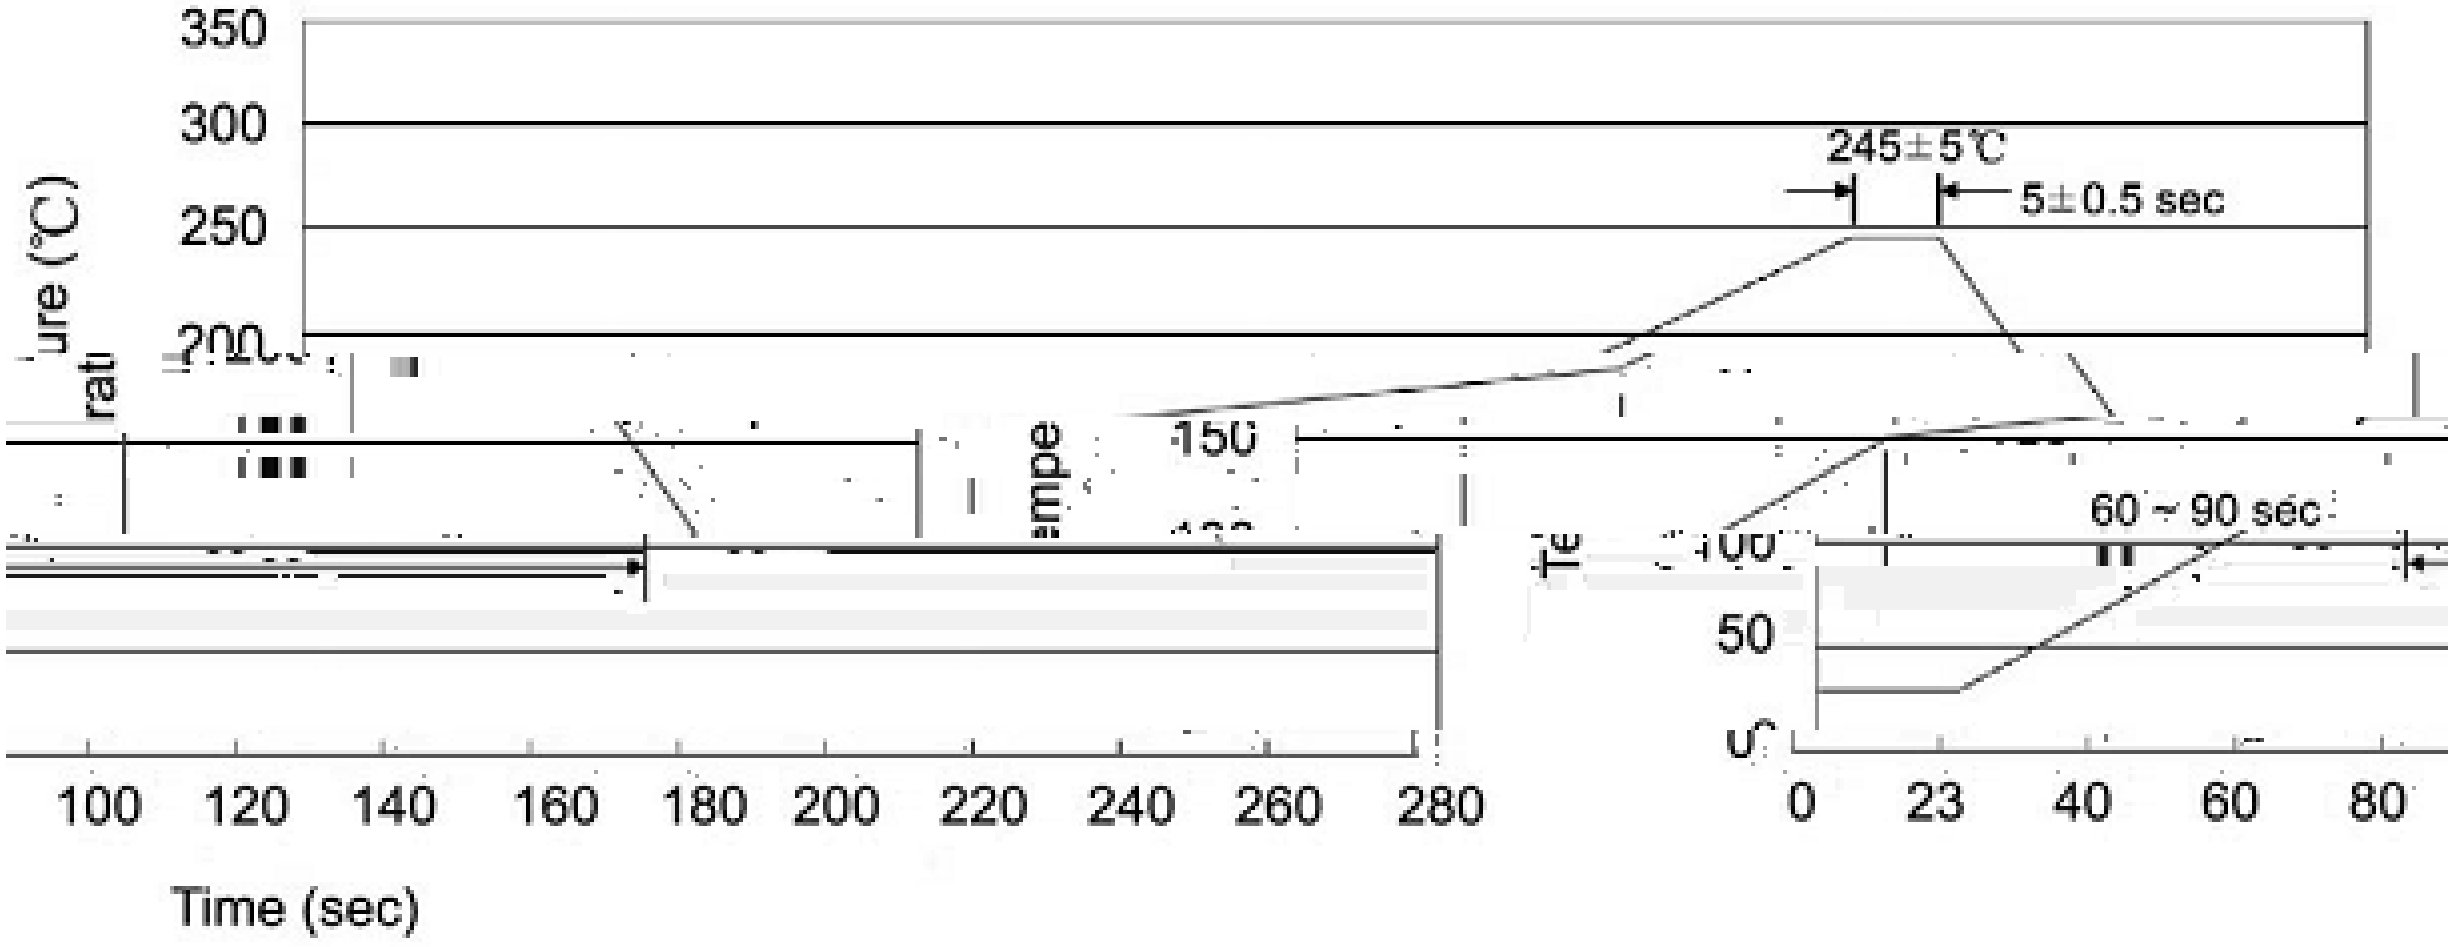

1 25 150 60 90sec;
2 245±5 5±0.5sec;
3 2 10 /sec.

Note:
1.Preheating:25~150 , Time:60~90sec.
2.Peak Temp.:245±5 , Duration:5±0.5sec.
3. Cooling Speed: 2~10 /sec.

⩤ ΰ q ̄`ΥŢ / Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

ɒ ㄴ ≺— / Packaging SPEC.

/ REEL

Package Type 封	Units 包 量					Dimension 包 尺寸 (unit: mm³)		
	Units/Reel /卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box /盒	Inner Boxes/Outer Box 盒/	Units/Outer Box /	Reel	Inner Box 盒	Outer Box
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

ä ɤ ʟ῎Ω / Notices