/ Descriptions

VRW0656 ṂṂ Ḫ QSQ ÆḾ ч s Ⅱ ㄱ


/ Features

лъ NWD5348 Йӌ ´

/ Applications

ᵻ ˇ ᵚ ᵚ ᶻ ᵓ ᶎ ˇΩ

/ Equivalent Circuit



/ Pinning




X X X


/ Marking

KTC4076


/ Electrical Characteristic Curve

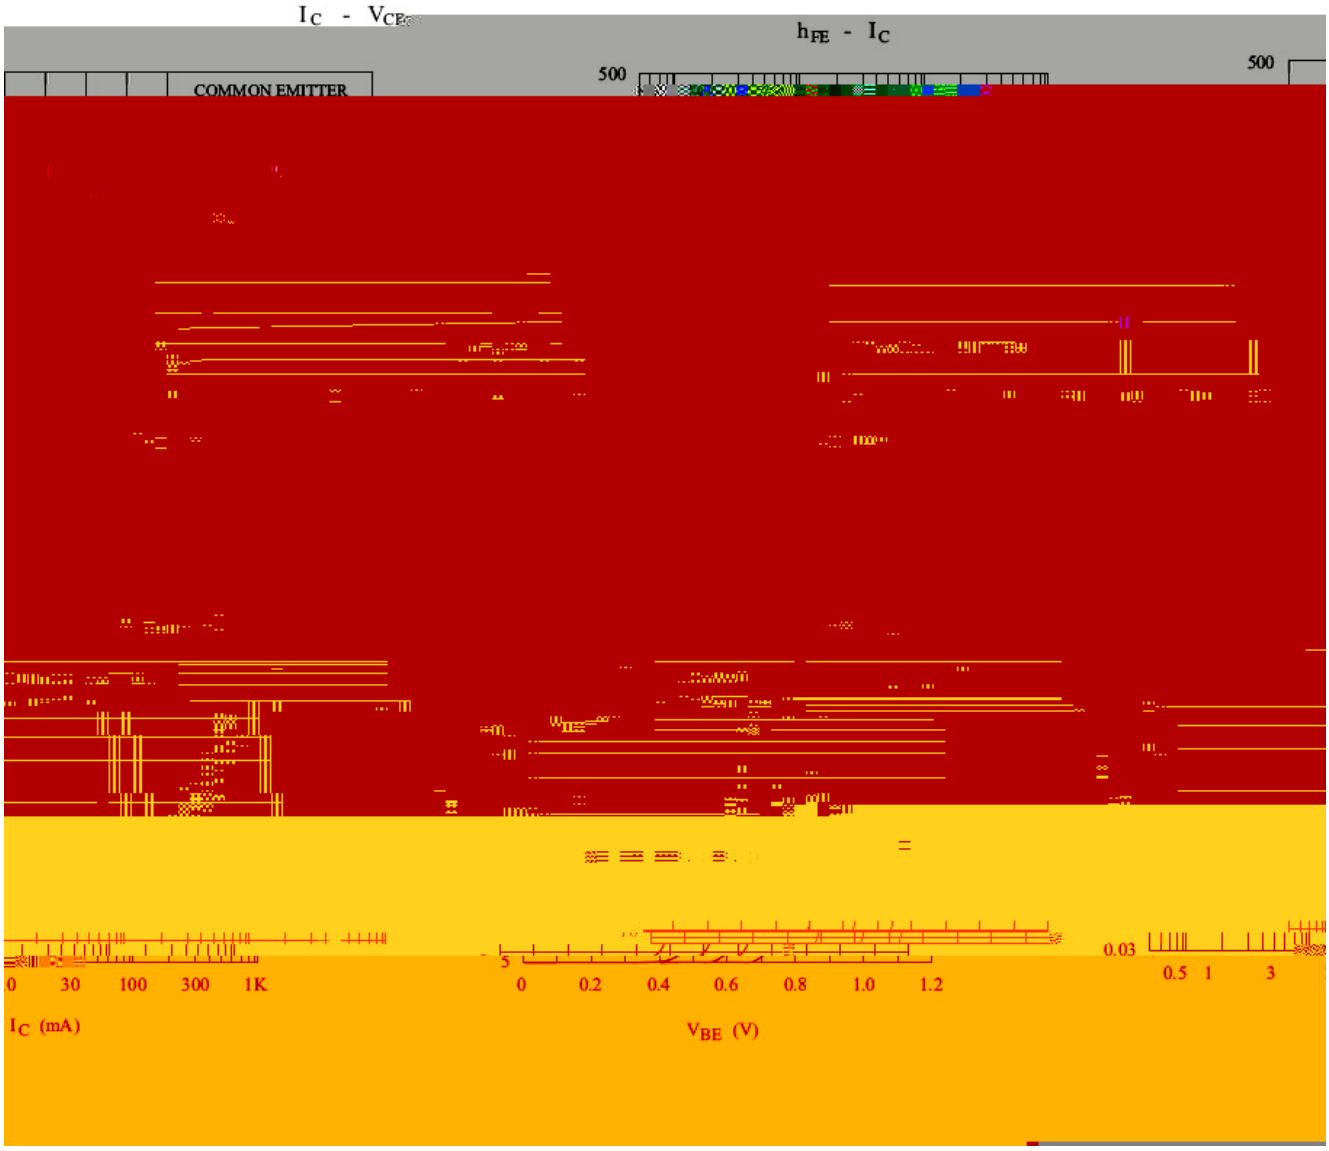

/ Package Dimensions

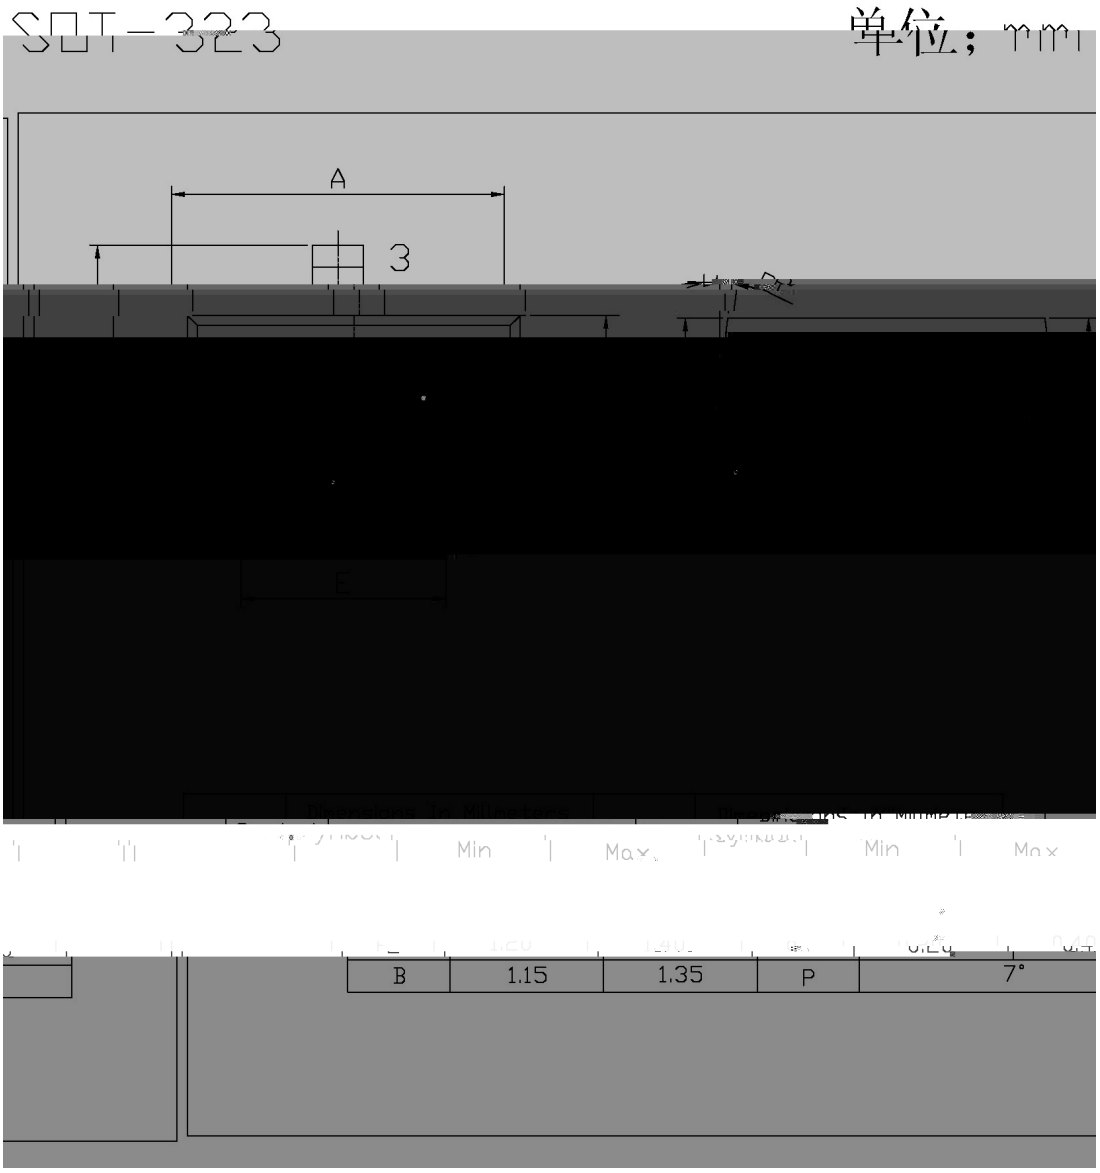

/ Marking Instructions

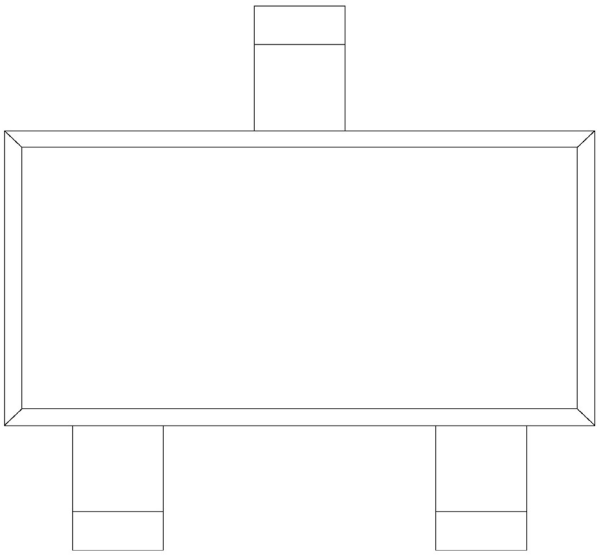


ِ ˝ χ

K χ ѭ ϗ и Ґ

Z χ ѭ ϳ N Ґ

R χ ѭ k ıн ‘ ⁶ Ґ

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

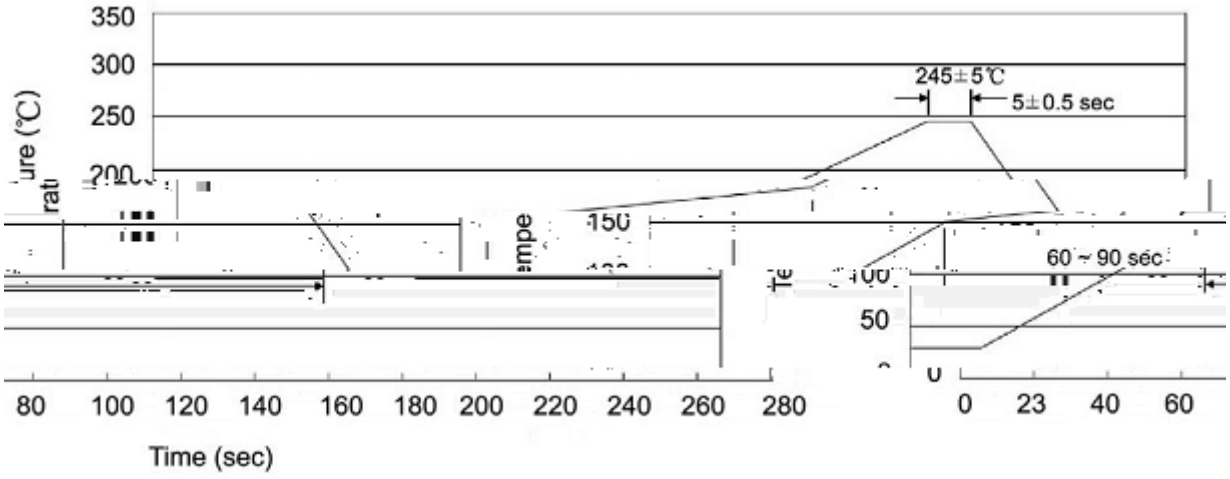

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices