	! " #	$! % & '	! ( ) % * +	, -	. /

/ Descriptions

1.0A MBF
1.0A Surface Mount Schottky Bridge，MBF thin package。


/ Features

40V~200V 1.0A
High Surge Current Capability,Reverse Voltage:40to200V,Forward Current：1.0 A,Designed for Surface Mount Application.Halogen free product.

/ Applications

.
General purpose.

/ Equivalent Circuit



/ Pinning









/ Marking

See Marking Instructions.

/ Package Dimensions

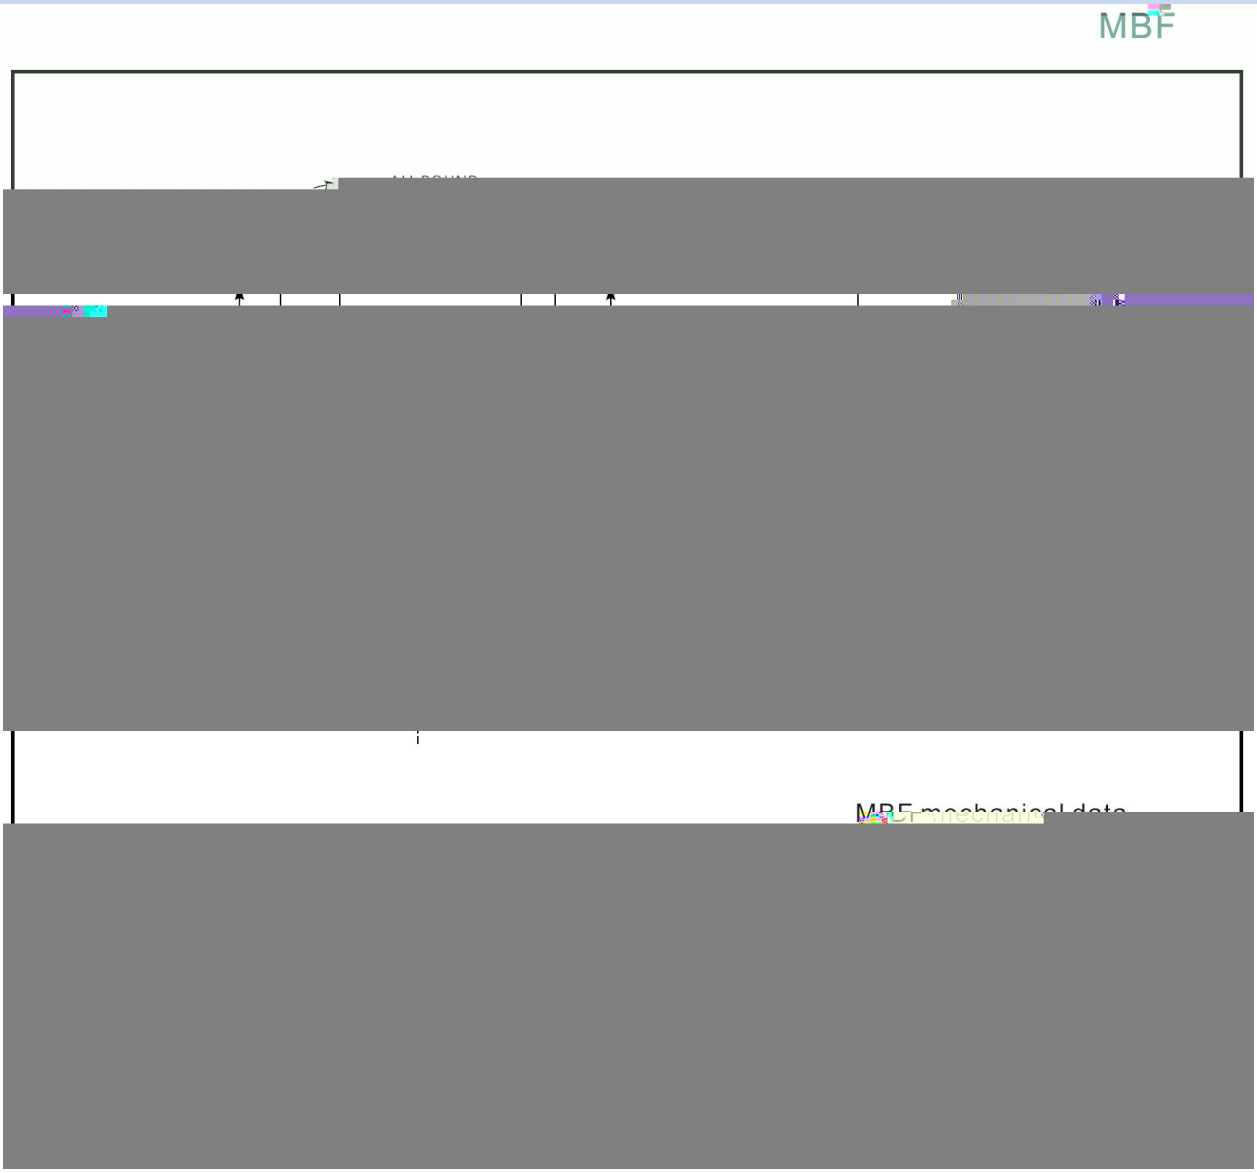

/ Marking Instructions

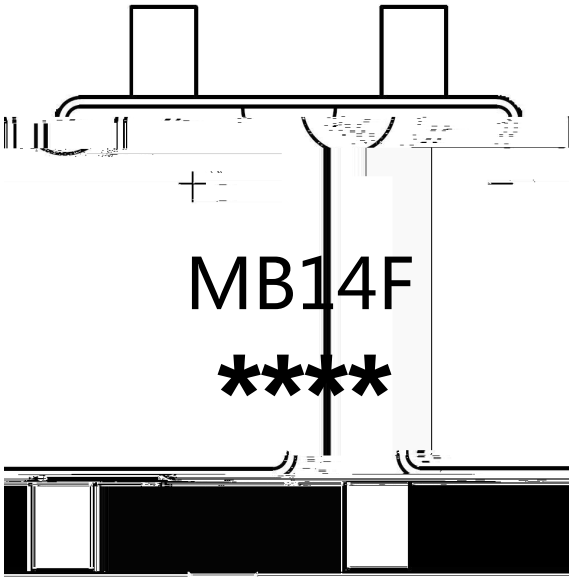

MB14F


**** 1 * 3 *

Note:

MB14F Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

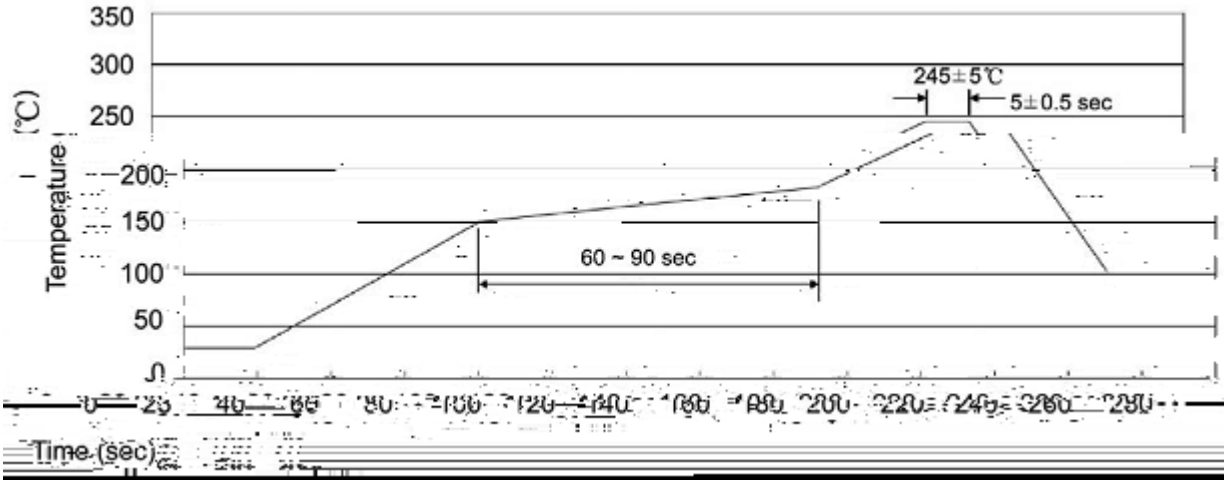

					Note:
1	25	150	60	90sec;	1.Preheating:25~150℃, Time:60~90sec.
2	245±5			5±0.5sec;	2.Peak Temp.:245±5℃,