

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	150	V
RMS Forward Current	$I_{F(RMS)}$	30	A
Average Forward Current	$I_{F(AV)}$	10	A
Average Forward Current	$I_{F(AV)}$ total device	20	A
Non Repetitive Peak Surge Current	I_{FSM}	180	A
Thermal Resistance Junction to Case	$R_{\theta Jc}$	1.5	/W
Junction Temperature Range	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	I_F =10A(Tc=25)			0.9	V
		I_F =10A(Tc=125)		0.69	0.75	V
		I_F =20A(Tc=25)			1.0	V
		I_F =20A(Tc=125)		0.79	0.86	V


/ Electrical Characteristic Curve

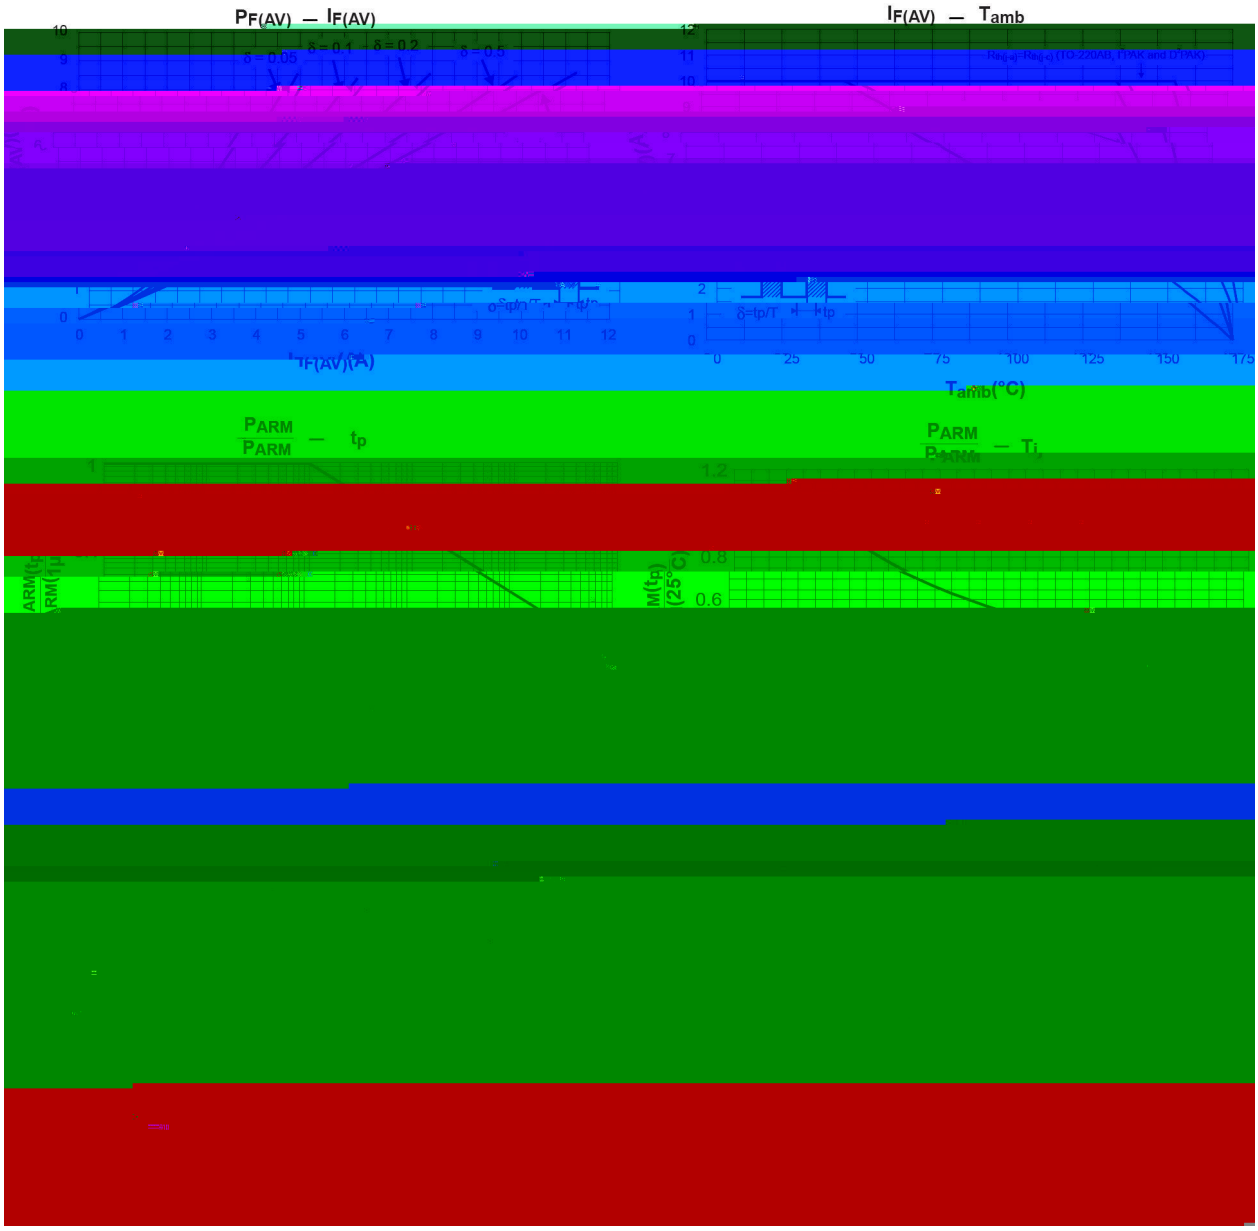


/ Electrical Characteristic Curve

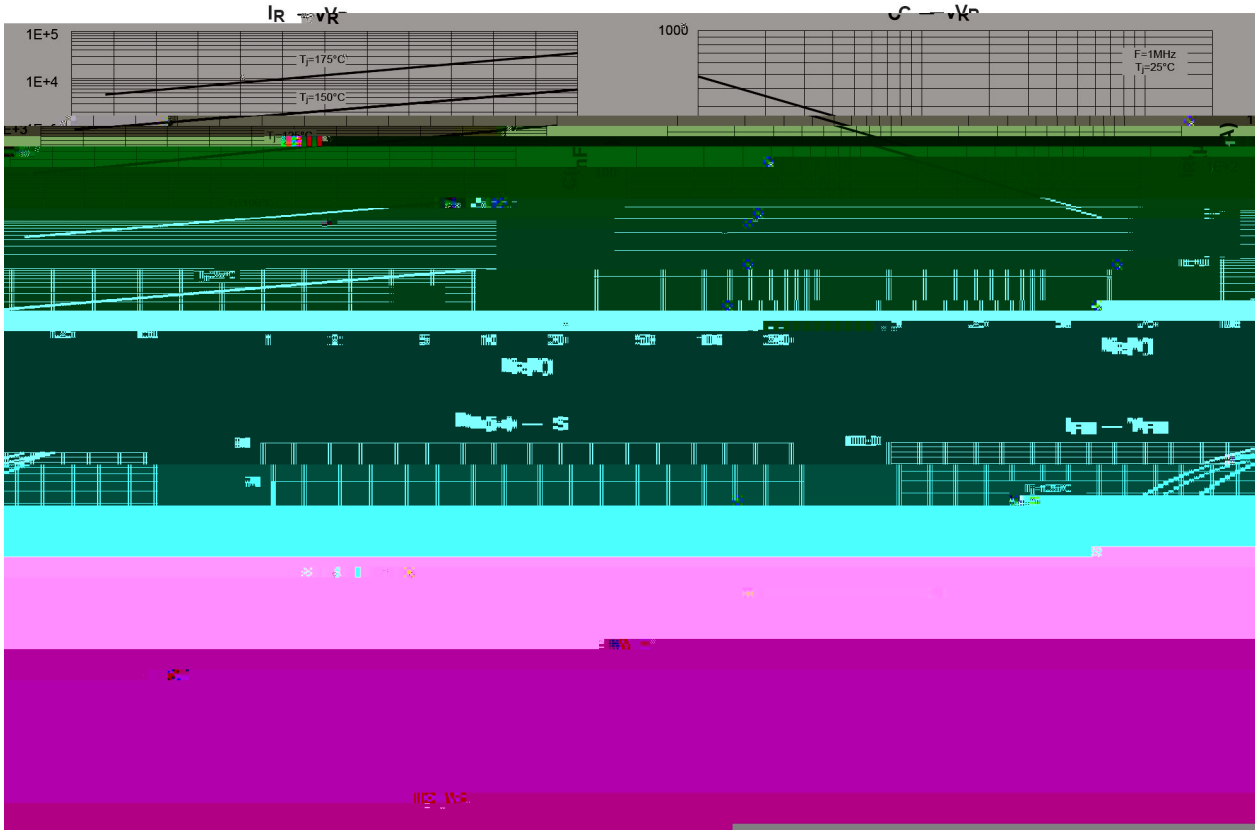

/ Package Dimensions

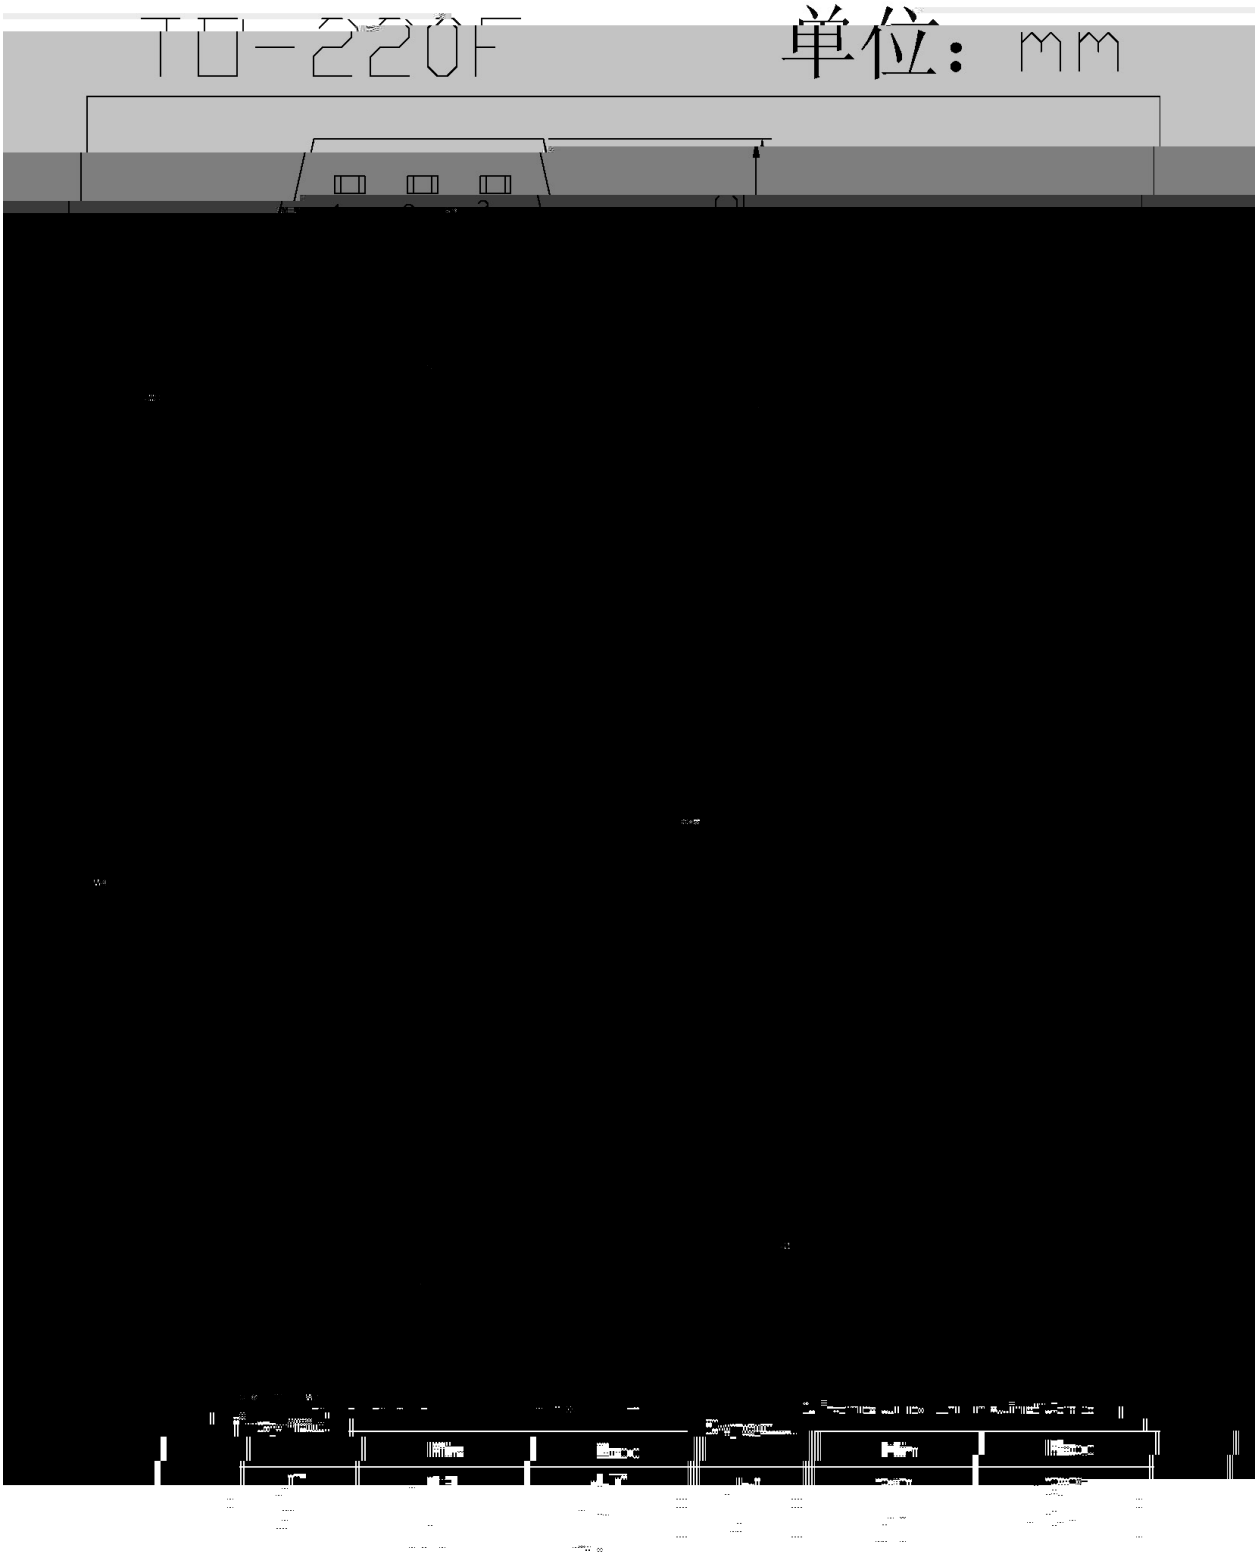

/ Marking Instructions

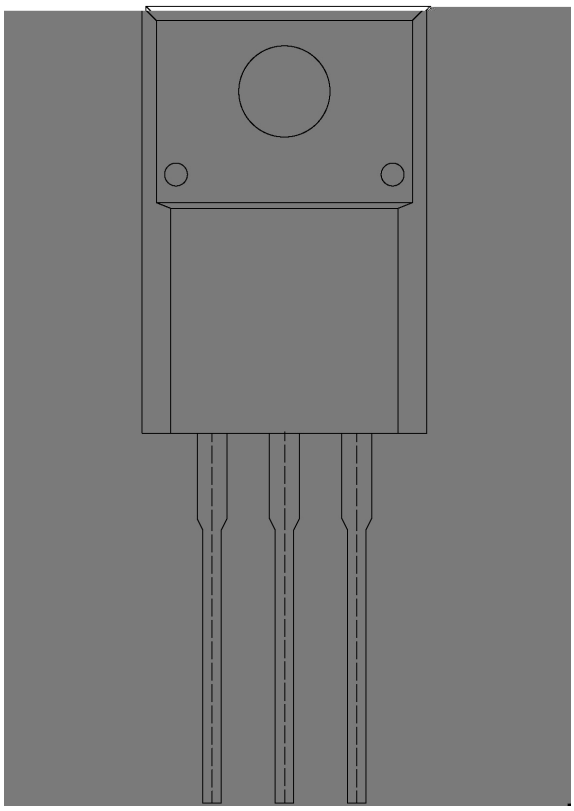

BR

MBRF20150

CT:


****

Note:

BR: Company Code

MBRF20150: Pr57d05ba6C t , code change with Lot No. 9 TD3.24 0 Tc( )Tj

( ) / Temperature Profile for Dip Soldering(Pb-Free)

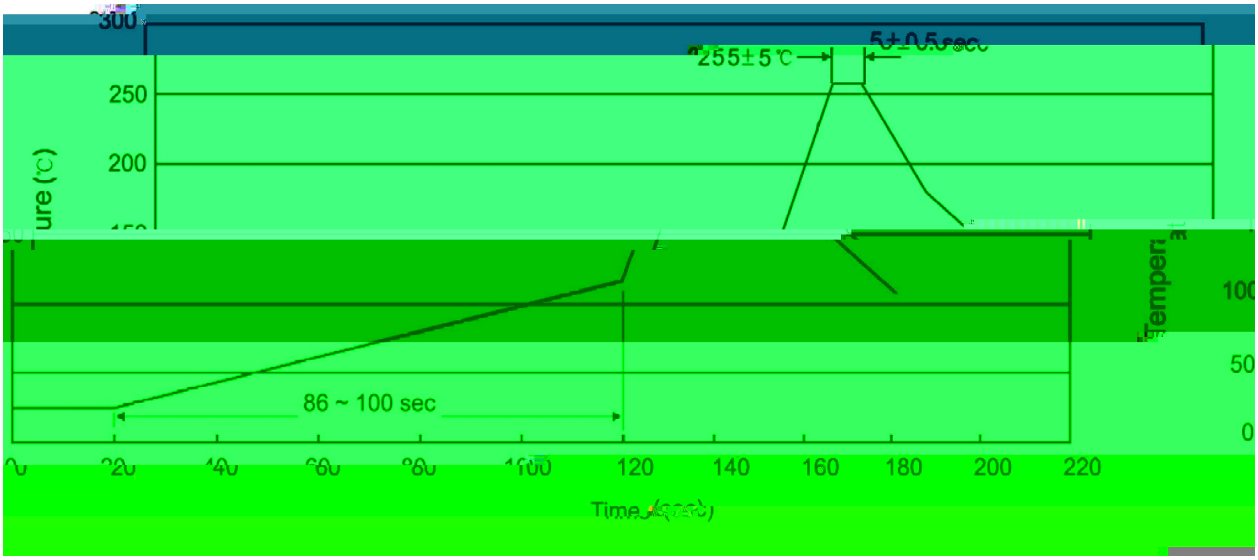

					Note:
1		25	150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2		255±5		5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3			2 10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type		Units	Dimension	(unit mm^3)