

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	400	V
Collector to Emitter Voltage	V_{CEO}	250	V
Emitter to Base Voltage	V_{EBO}	5	V
Collector Current - Continuous	I_C	16	A
Peak Collector Current	I_{CP}	30	A
Base Current	I_B	5	A
Collector Power Dissipation	P_C(TC=25)	200	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CEO}	I_C=100mA I_B=0	250			V
Collector Cut-off Current I	I_{CEO}	V_{CE}=200V I_E=0 A			100μ	μA

/ Package Dimensions

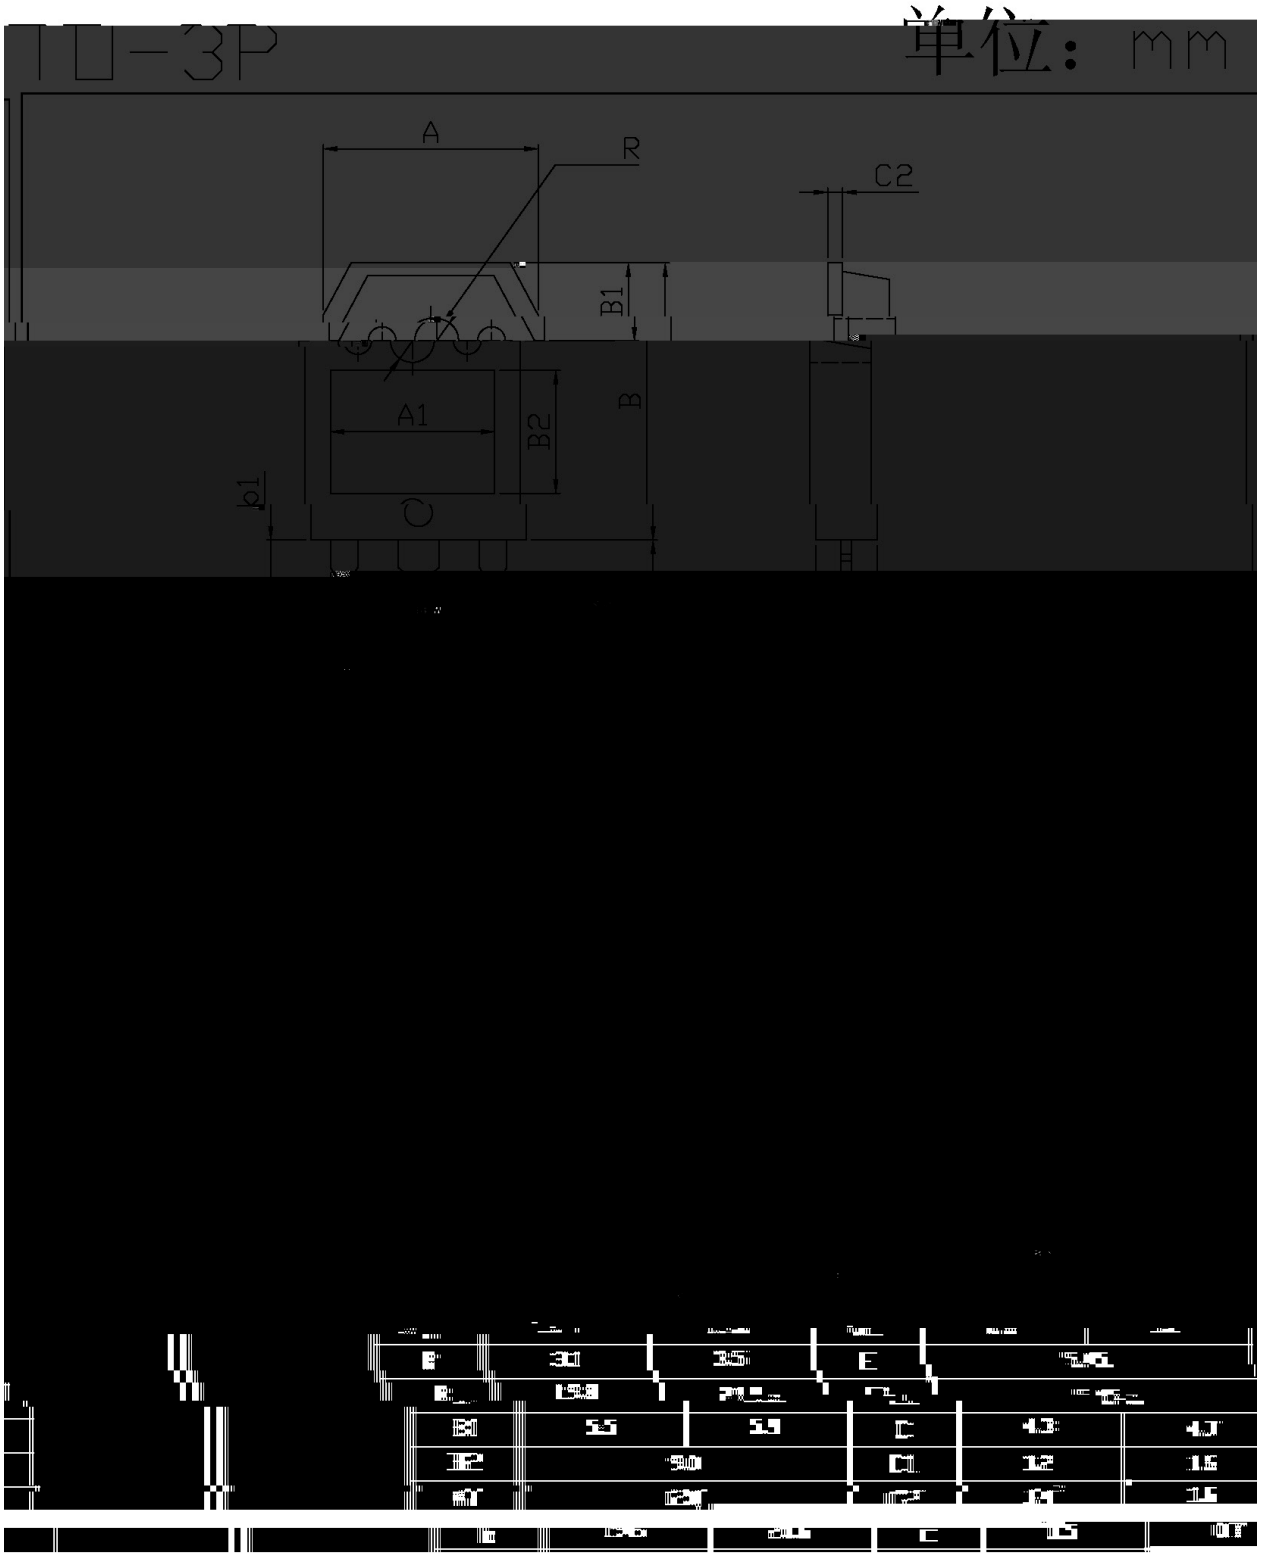

/ Marking Instructions

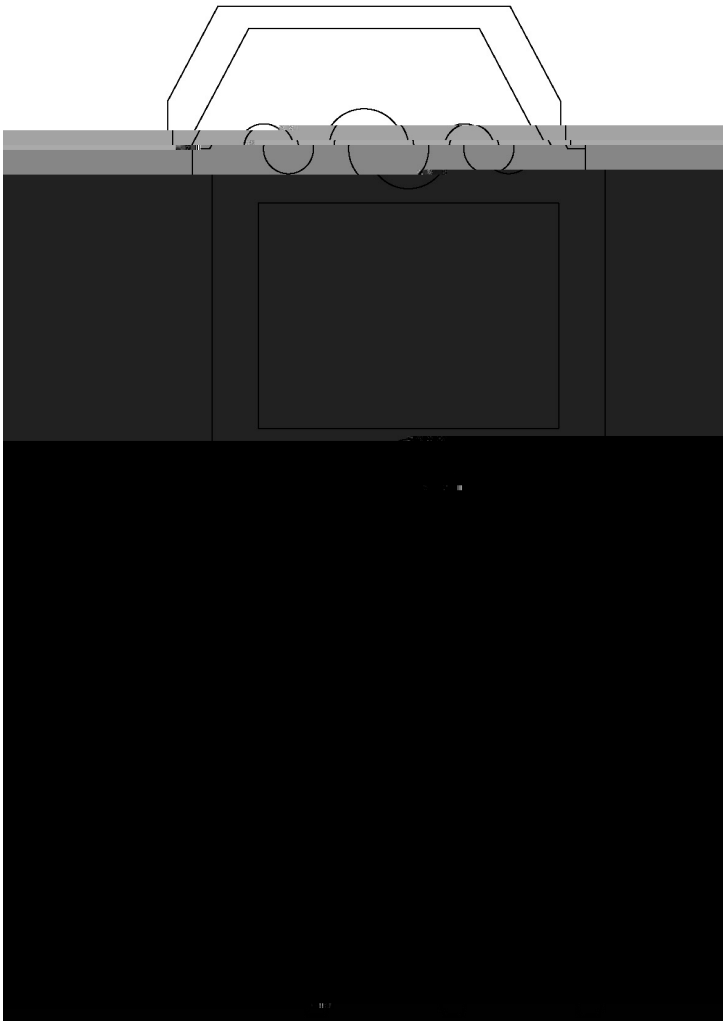

BR:

W21194

****

Note:

BR: Company Code.