MUR1640CT

DATA SHEET

/ Absolute Maximum Ratings(Ta=25)

	N		Ꮒ
		×	


/ Electrical Characteristics(Ta=25)


	N			Ɛ		Ꮒ

41 ڑ ڕ


ڻ ۀ

/ Electrical Characteristic Curve

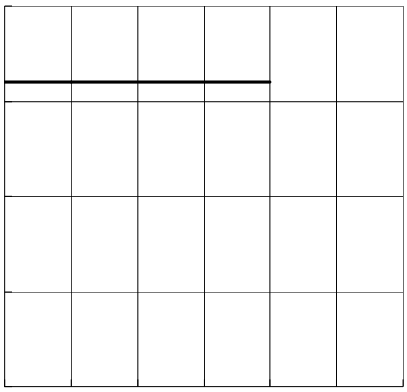

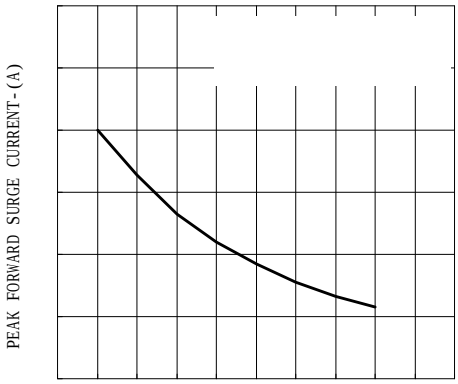


IF - VF

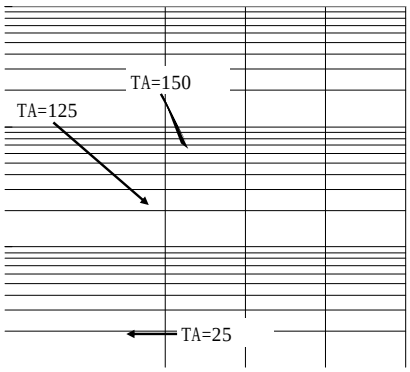

IR - VR




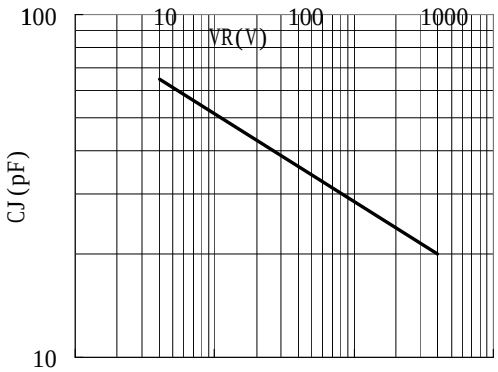

MUR1640CT

DATA SHEET


/ Marking Instructions

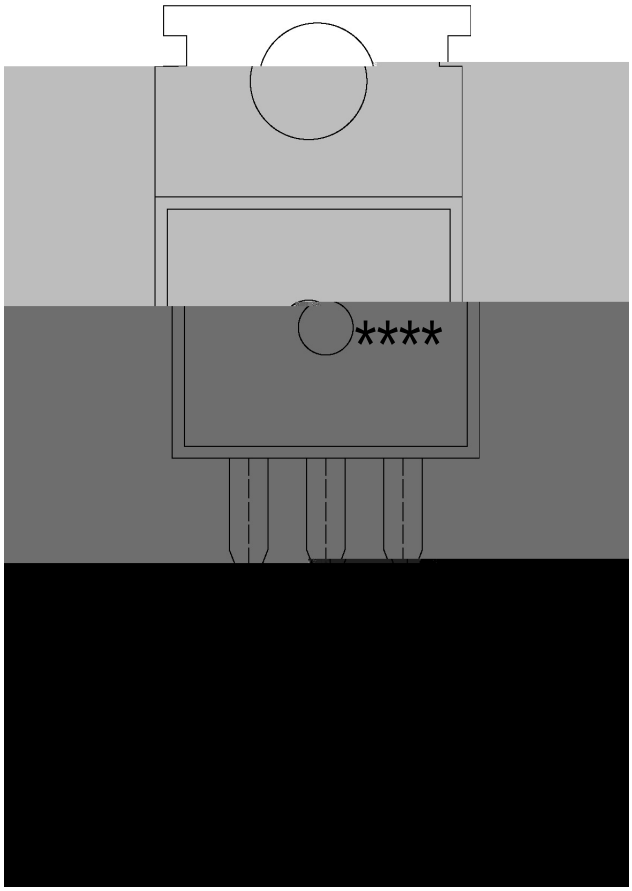

MXR4643

CW

( ) / Temperature Profile for Dip Soldering(Pb-Free)

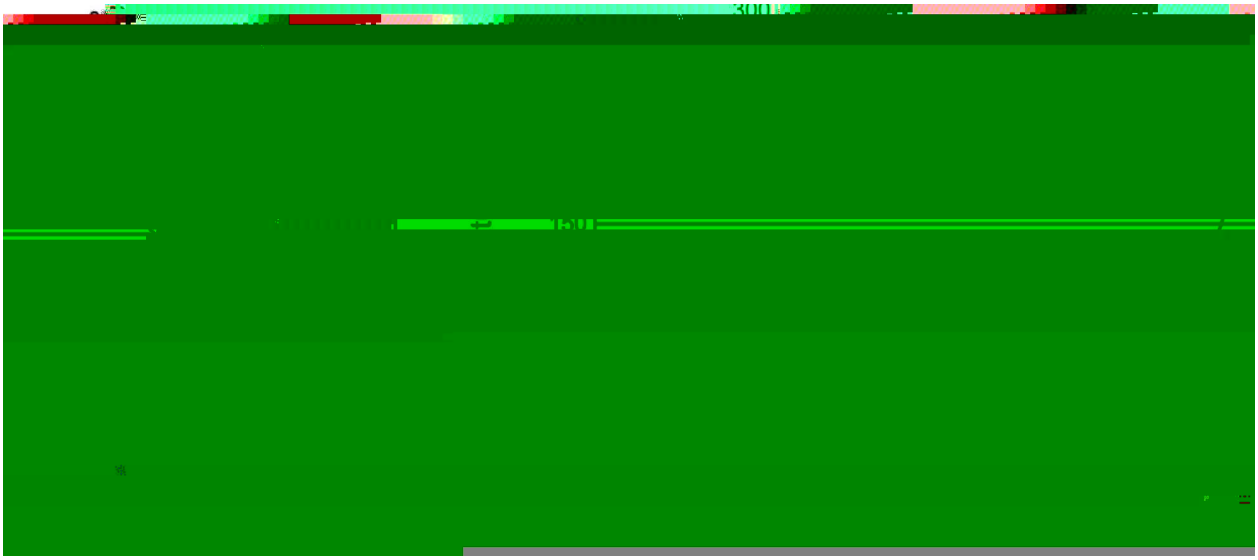

ب

أ ڑ

± ڑ ± ± ±

ھ

/ Resistance to Soldering Heat Test Conditions

± ڑ ±

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices