

Parameter	Symbol	Rating	Unit

/ Electrical Characteristic Curve


IF - TC

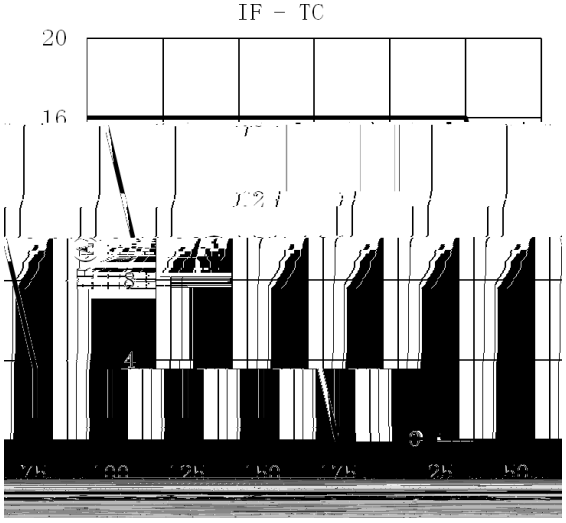


IFSM

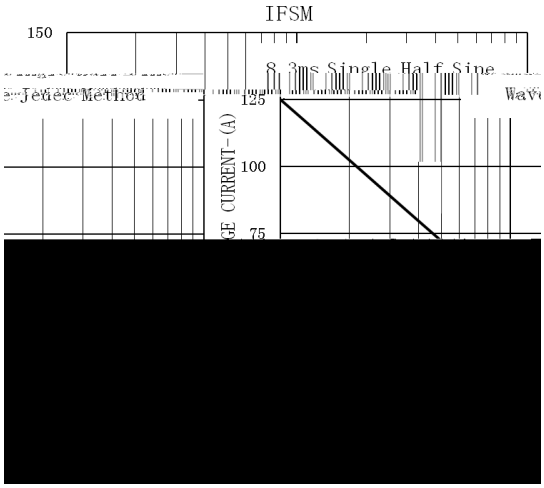


IF - VF

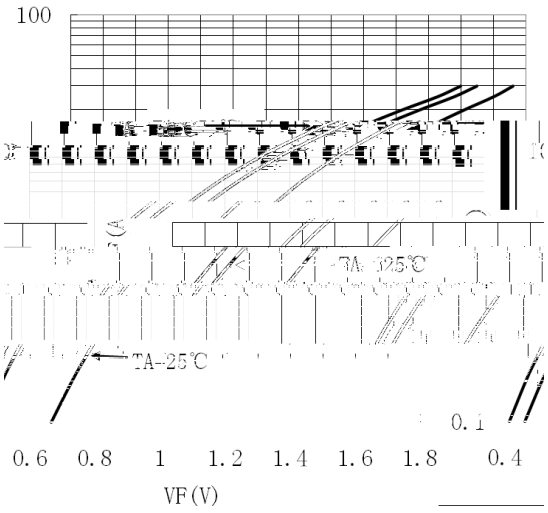


IR - VR

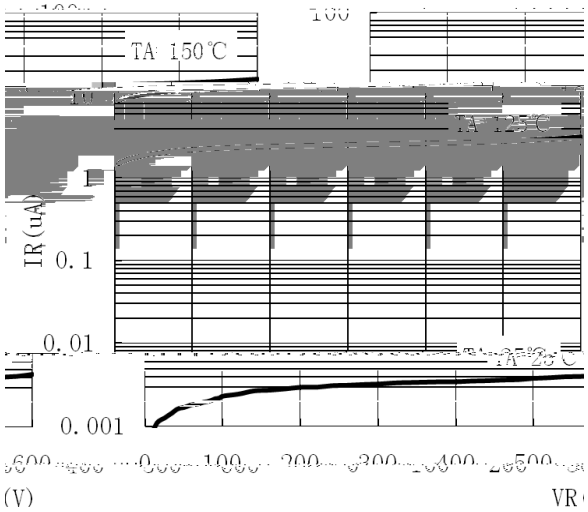


CJ - VR

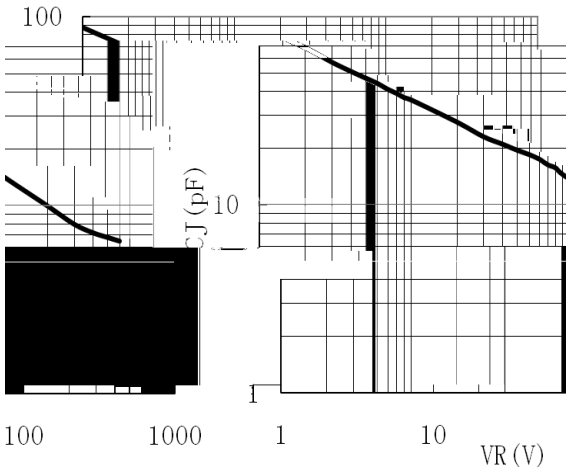


/ Package Dimensions

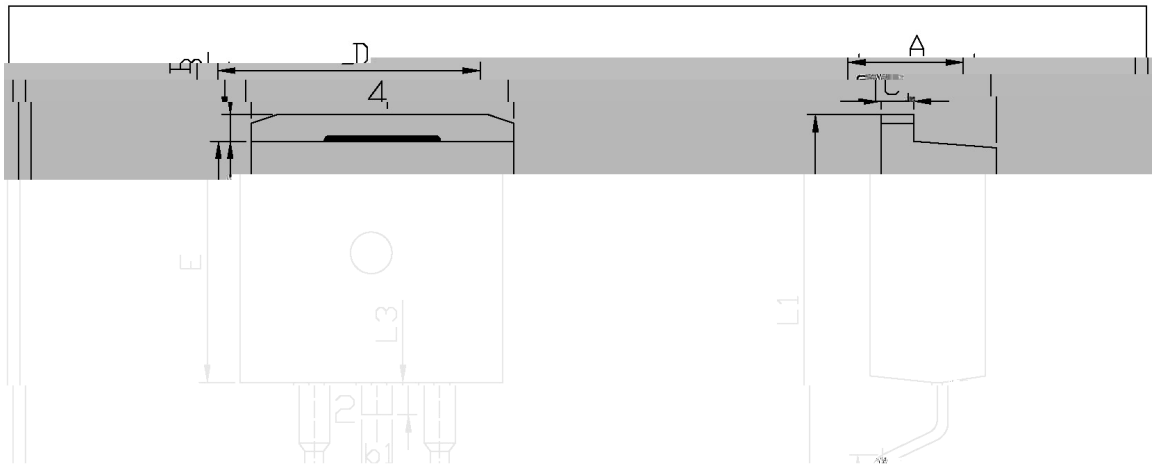

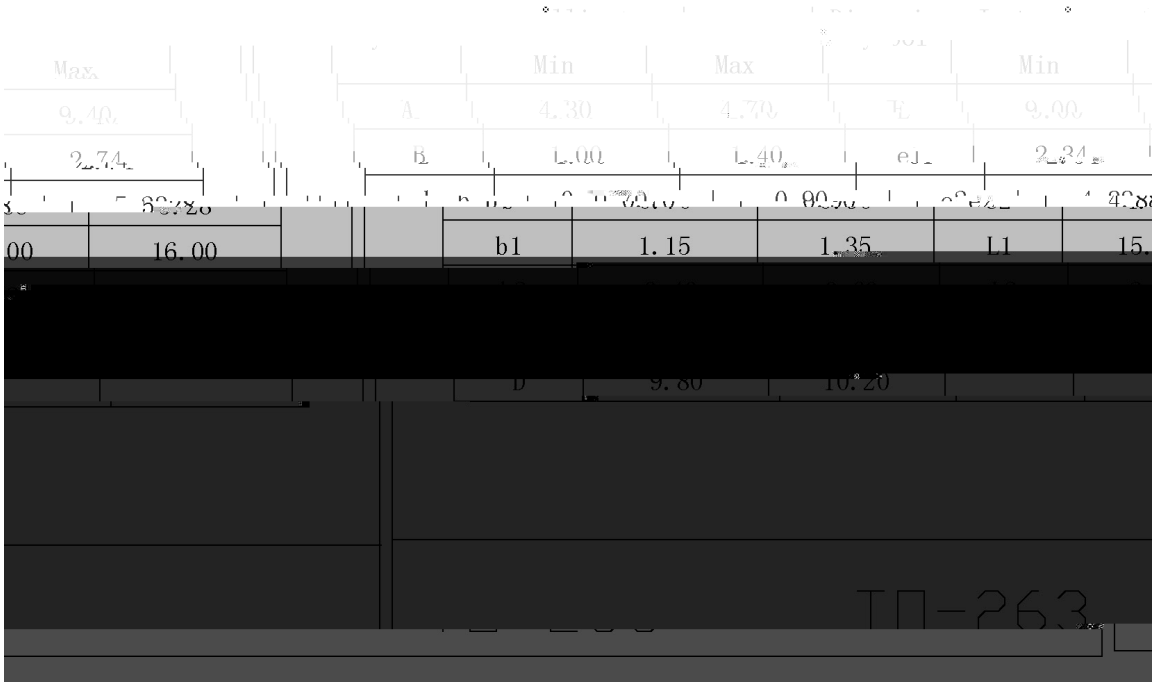

/ Marking Instructions

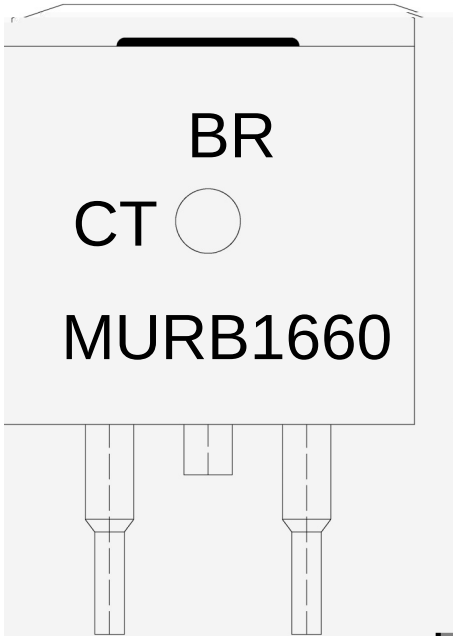

BR

MURB1660


CT:

****

Note:

BR:	Company Code.
MURB1660	Product Type.
CT:	Internal Structure
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

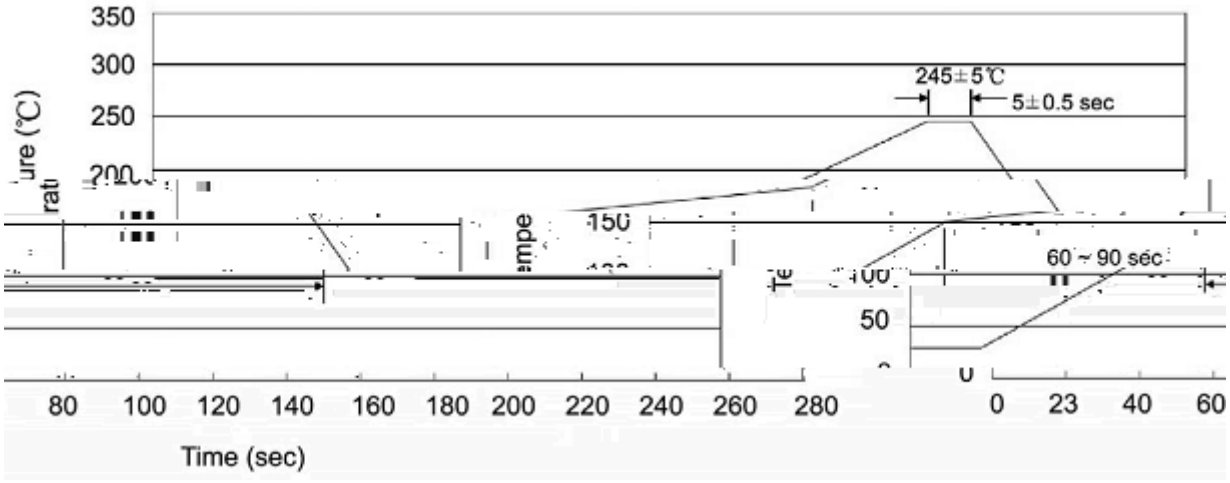

Note:

1	25	150	60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2	245±5			5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ TUBE

Package Type 封装形式	Units 包装数量	Dimension 包装尺寸 (unit: mm^3)
	只 套管	