

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	200	V
RMS Voltage	V_{RMS}	140	V
DC Blocking Voltage	V_{DC}	200	V
Average Forward Current	I_F	2 × 10	A
Non Repetitive Peak Surge Current	I_{FSM}	120	A
Thermal Resistance Junction to Case	$R_{\theta Jc}$	3.3	/W
Operating Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Package Dimensions

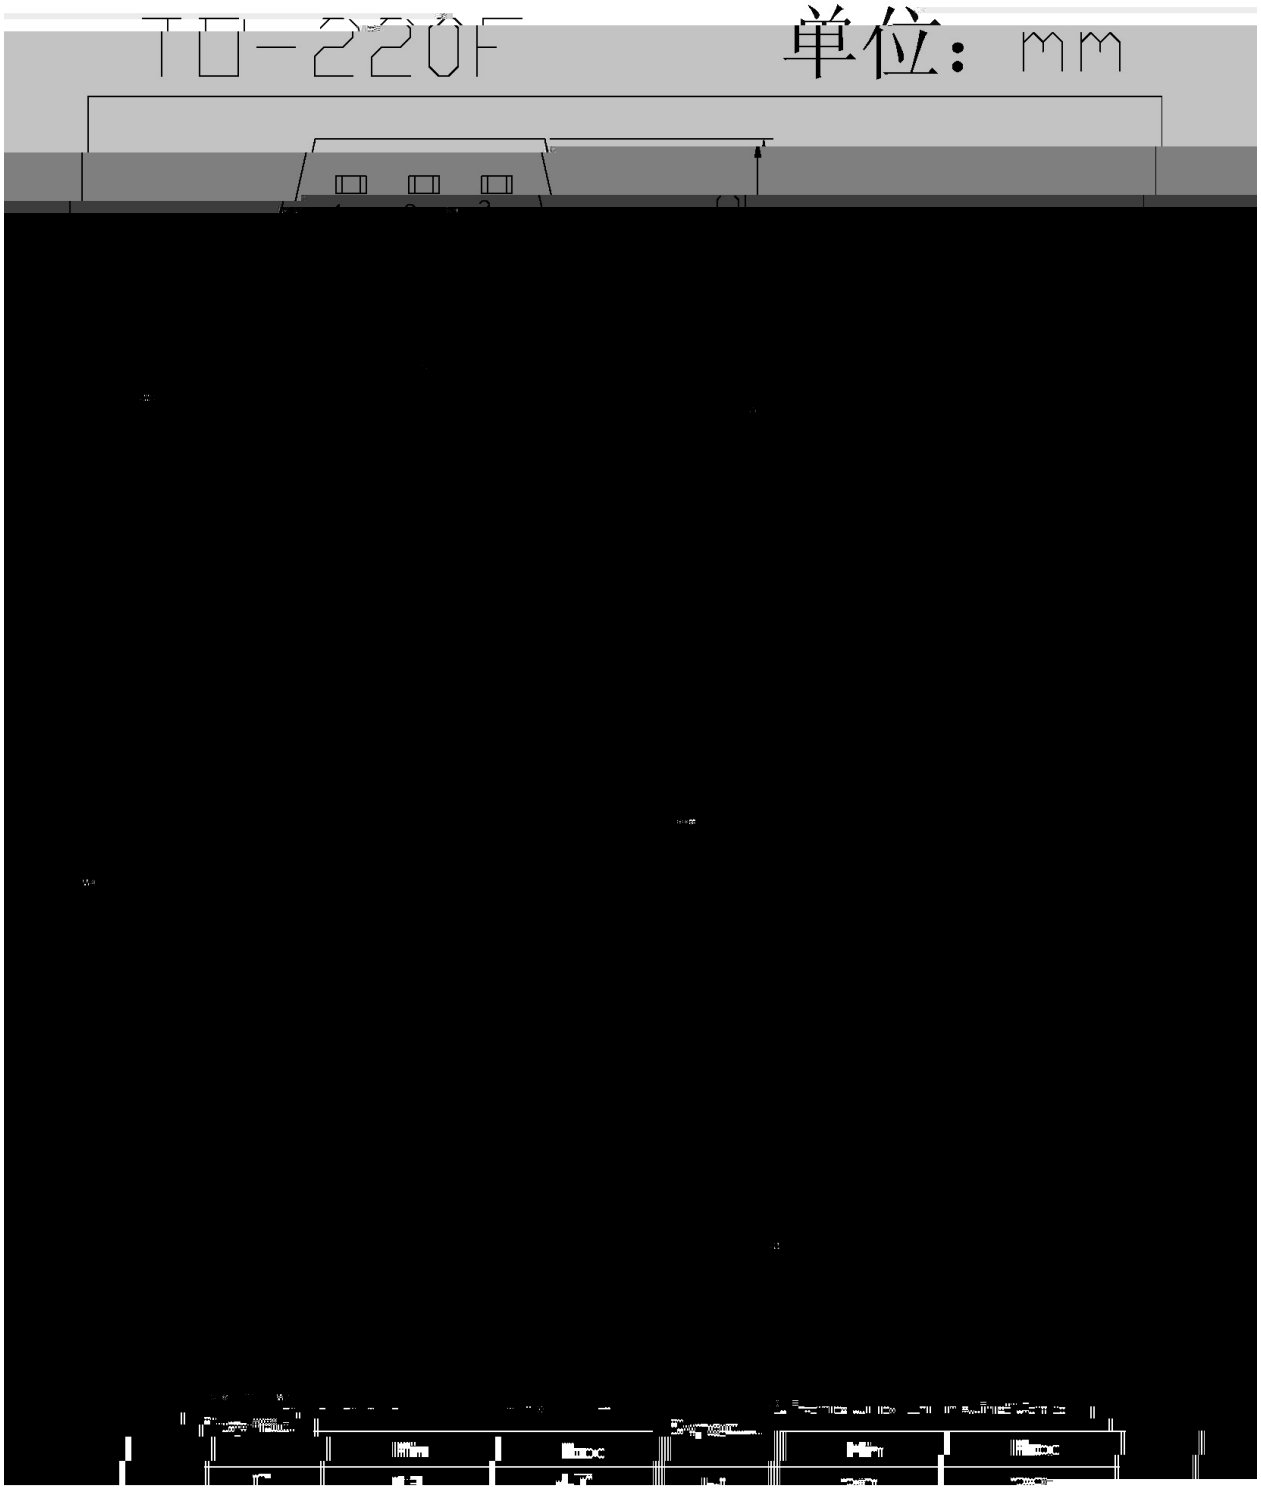

/ Marking Instructions

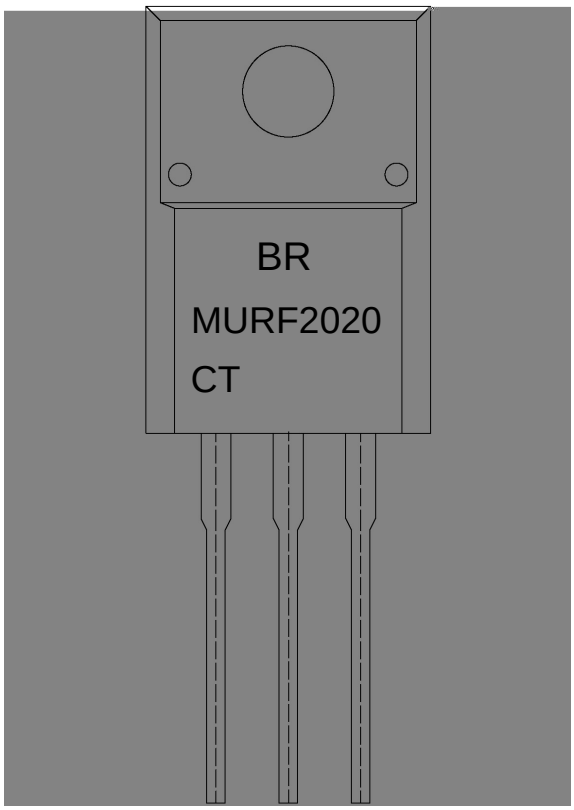

BR

MURF2020

CT:

****

Note:

BR:	Company Code
MURF2020:	Product Type.
CT:	Internal Structure
****:	Lot No. Code, code change with Lot No.