
/ Descriptions

TO-220S Ultrafast Recovery Diode in a TO-220S Plastic Package.

/ Features

Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.

For high frequency, high voltage, high current rectifier diode, freewheeling diode.




PIN1 Anode PIN 2 Cathode PIN 3 Anode PIN 4 NC

/ h_{FE} Classifications & Marking

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	200	V
RMS Voltage	V_{RMS}	140	V
DC Blocking Voltage	V_{DC}		

/ Marking Instructions

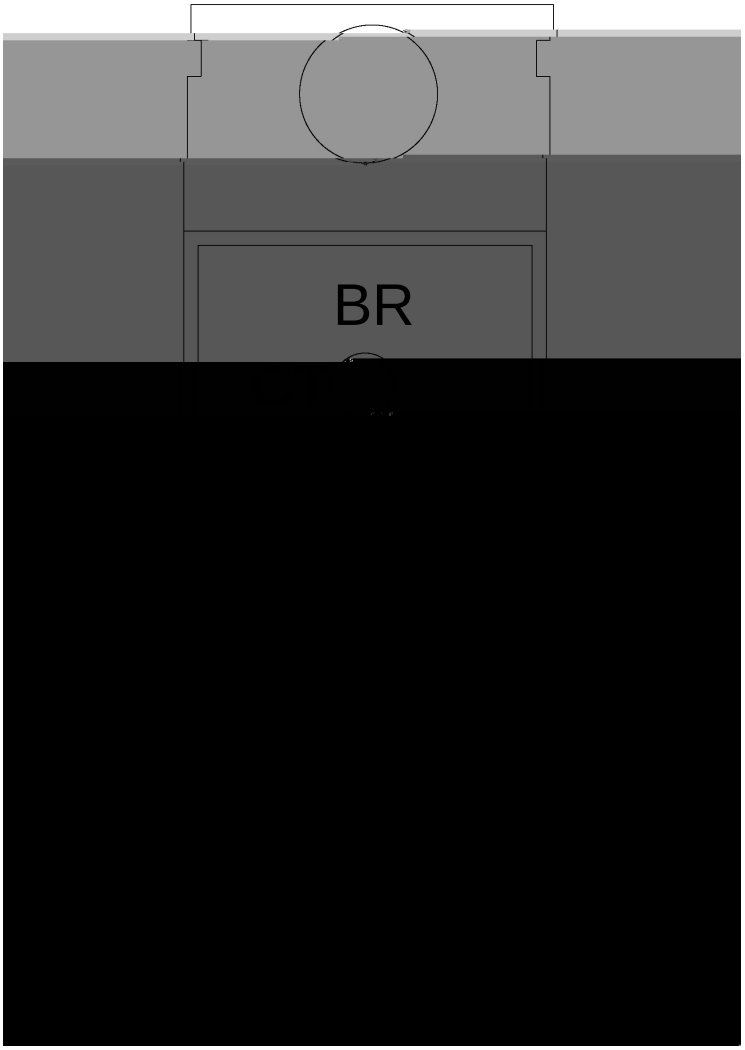

BR

MURJ2020


CT:

****

Note:

BR:	Company Code
MURJ2020	Product Type.
CT:	Internal Structure
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

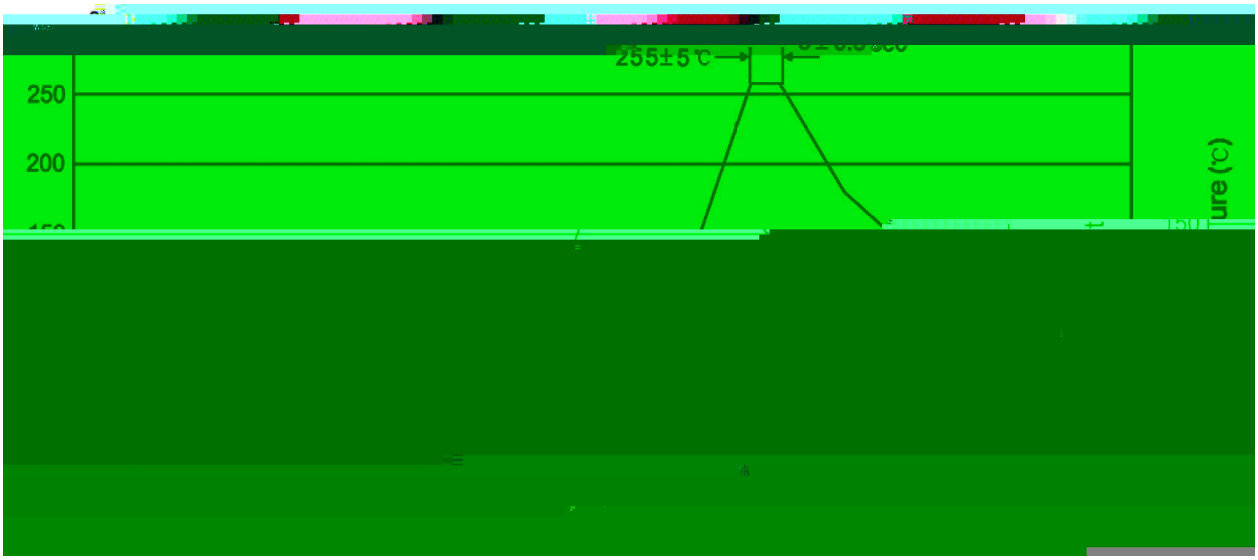

								Note:	
1		25	150			60	90sec;	1.Preheating:25~150	, Time:60~90sec.
2		255±5					5±0.5sec;	2.Peak Temp.:255±5	, Duration:5±0.5sec.
3				2	10	/sec.		3. Cooling Speed: 2~10	/sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type	Units	Dimension	(unit mm^3)