
SOT-23 PNP Silicon PNP transistor in a SOT-23 Plastic Package.

Low $V_{CE(sat)}$, high current.

General purpose switching and muting, LCD back-lighting, supply line switching circuits.







PIN 1 Base PIN 2 Emitter PIN 3 Collector


66DAtter.0.rent. 0 Feature 10.54F.9 62.rg 52.26 274.58 485.52 18Tw T60Pac4>(30.24T >77 0.0005 T60Pac4>(


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-20	V
Collector to Emitter Voltage	V_{CEO}	-20	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current	I_C	-2.0	A
Peak Collector Current	I_{CM}	-5.0	A
Base Current	I_B	-0.5	A
total power dissipation	$P_{tot(1)}$	1.0	W

/ Electrical Characteristic Curve

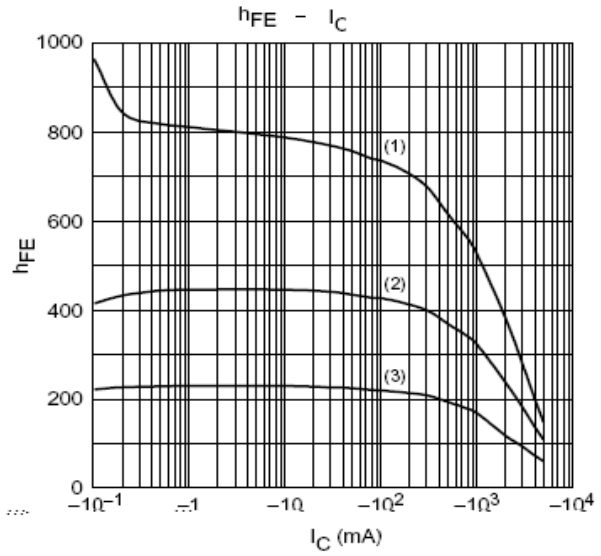


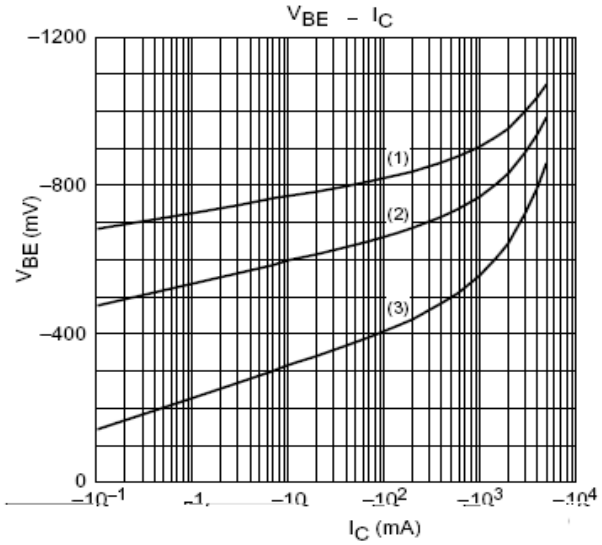

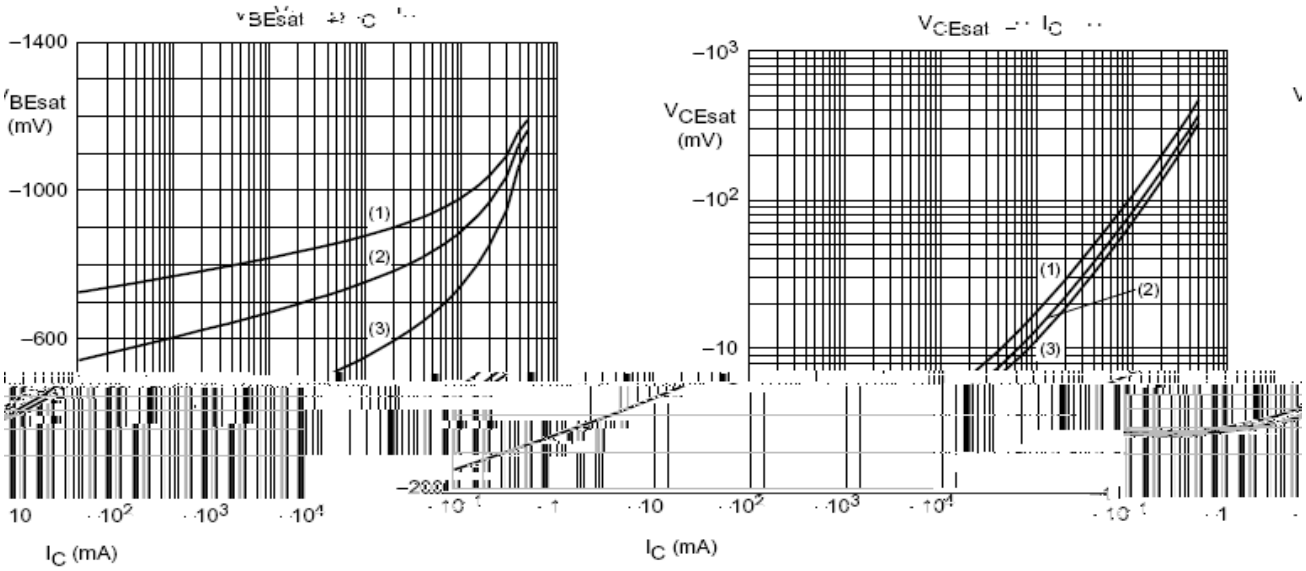


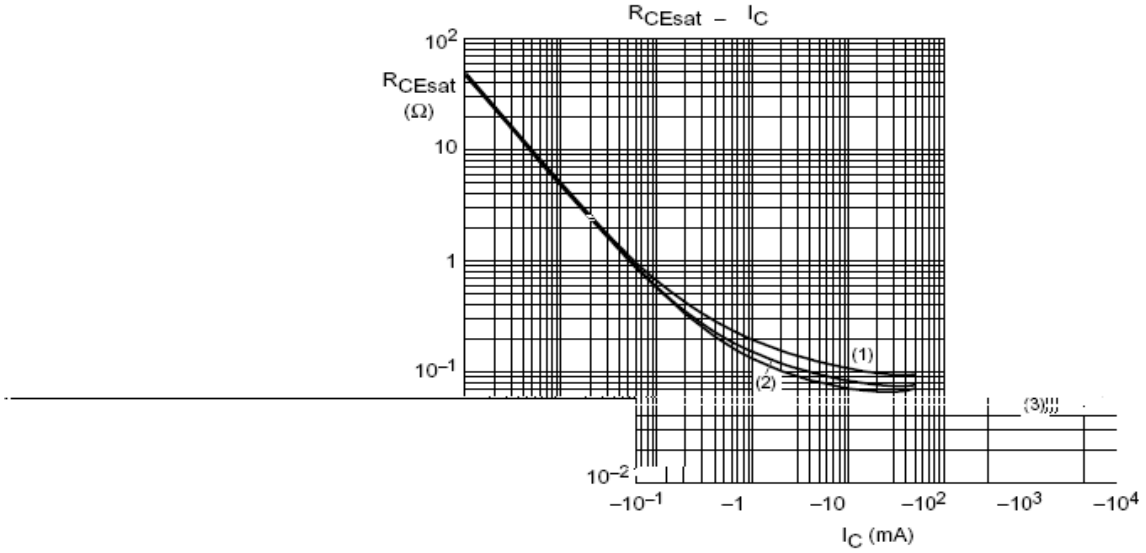

/ Package Dimensions

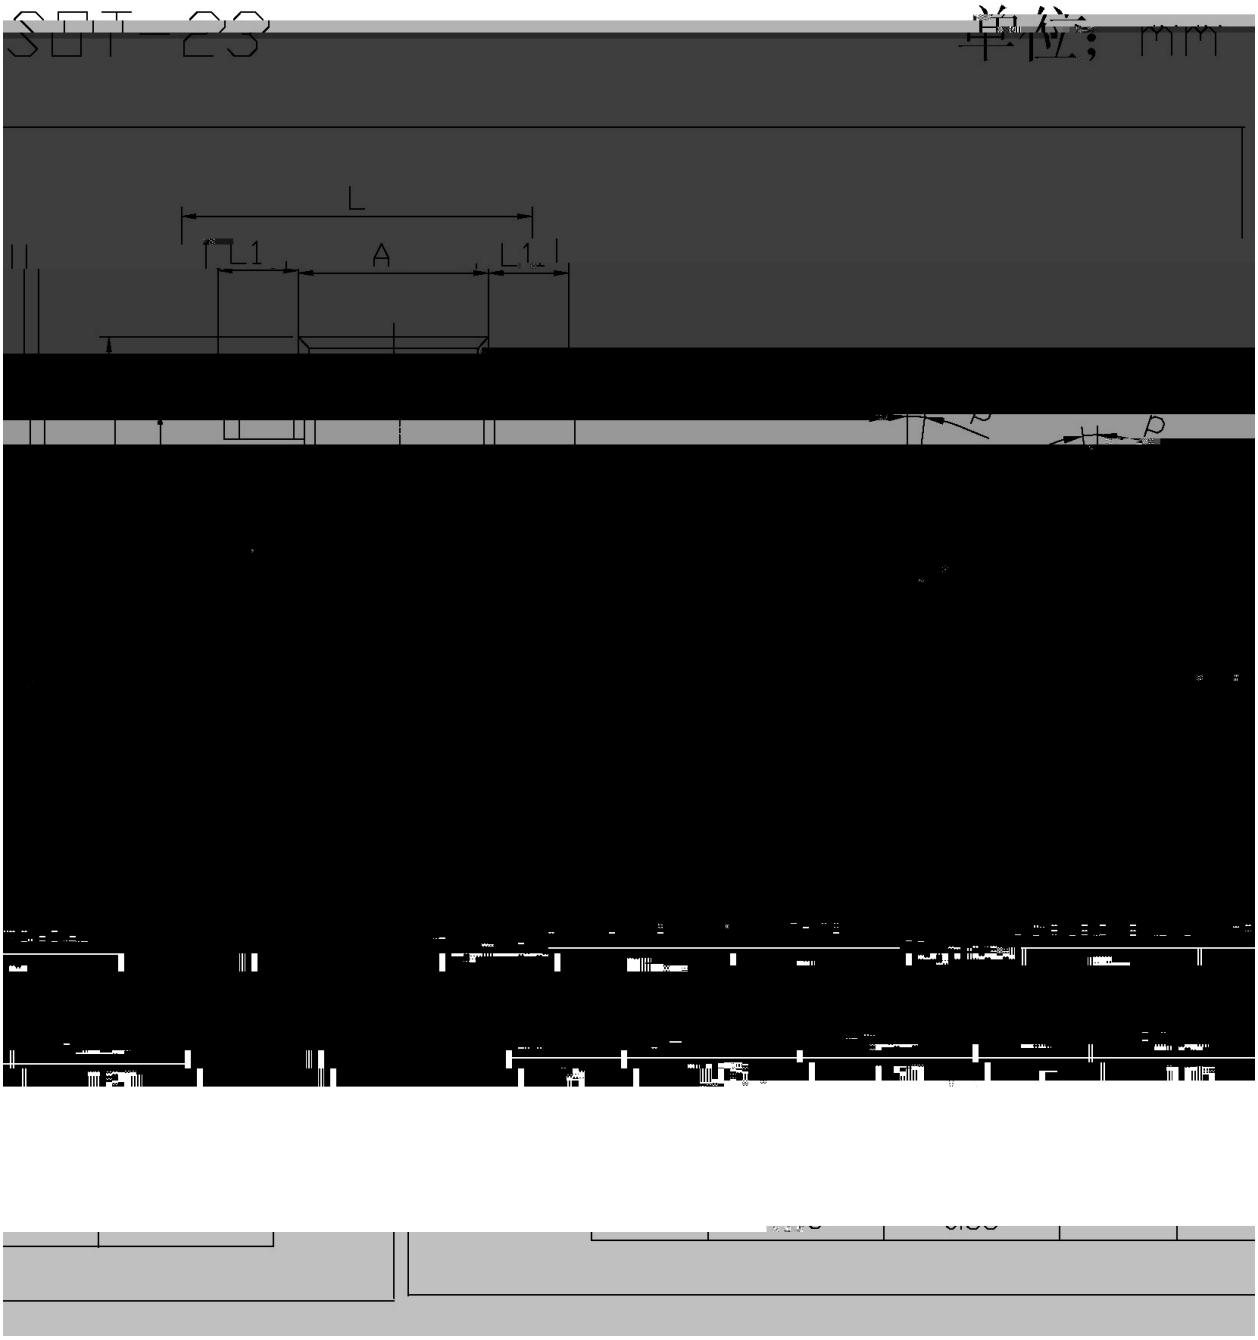

/ Marking Instructions

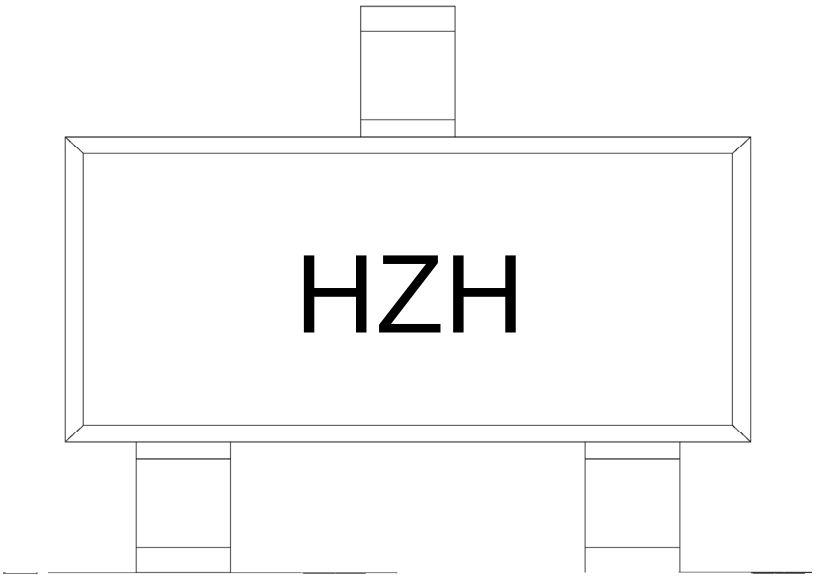

H

ZH

Note:

H	Company Code
ZH	Product Type