A	2020-5-7	ALL			

Rev. A May.-2020

Parameter	Symbol	Rating	Unit

Fig.1 Forward Current Derating Curve

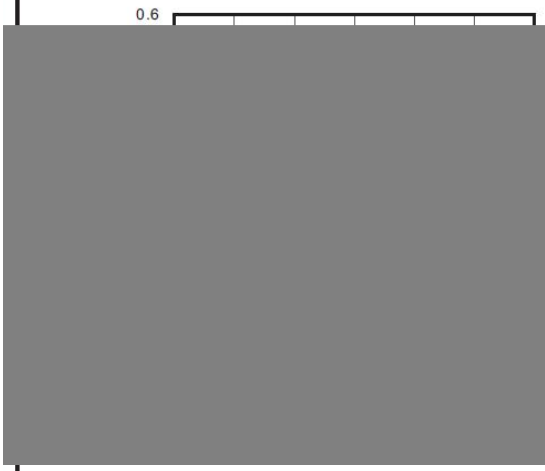


Fig.2 Typical Reverse Characteristics







R

R

Temperature Profile for IR Reflow Soldering(Pb-Free)



								Note:	
1		150	180			60	90sec;	1.Preheating:150~180	, Time:60~90sec.
2		245±5					5±0.5sec;	2.Peak Temp.:245±5	, Duration:5±0.5sec.
3				2	10	/sec.		3. Cooling Speed: 2~10	/sec.

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ REEL

Package Type	Units					Dimension		(unit mm^3)
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box